



**DPU-S245, DPU-S445,
RP-D10, RP-E10
Print Class Library for iOS
Application Programmer's Guide**

U00134990820

Seiko Instruments Inc.

U00134990800	January 2015
U00134990801	March 2015
U00134990802	August 2015
U00134990803	August 2015
U00134990804	February 2016
U00134990805	December 2016
U00134990806	April 2017
U00134990807	January 2018
U00134990808	February 2018
U00134990809	February 2019
U00134990810	July 2019
U00134990811	October 2019
U00134990812	March 2020
U00134990813	June 2020
U00134990814	September 2020
U00134990815	March 2022
U00134990816	October 2022
U00134990817	December 2022
U00134990818	April 2023
U00134990819	February 2024
U00134990820	March 2024

Copyright © 2015-2024 by Seiko Instruments Inc.
All rights reserved.

IOS is a trademark or registered trade mark of Cisco in the U.S. and other countries and is used under license.

iPad®, iPad Air®, iPad mini™, iPhone®, iPod® are trademarks of Apple Inc., registered in the U.S. and other countries.

App Store™ is a service mark of Apple Inc.

Company names or product names may be a trademark or registered trademark.

SII reserves the right to make changes without notice to the specifications and materials contained herein and shall not be responsible for any damages (including consequential) caused by reliance on the materials presented, including but not limited to typographical, arithmetic, or listing errors.

Introduction

This manual describes the Print Class Library for iOS SDK (hereinafter referred to as "the SDK") for the printers provided by Seiko Instruments Inc. (hereinafter referred to as "SII").

Target Printers

This section lists the printers supported by the SDK.

	Description in This Manual	Interface	Printer
Mobile Printer	DPU-S245	Bluetooth	DPU-S245-01B-E DPU-S245-01C-E
	DPU-S445	Bluetooth	DPU-S445-01B-E DPU-S445-01C-E
POS Printer	RP-D10	Bluetooth	RP-D10-x27J2-B
		Ethernet	RP-D10-x27J1-E
	RP-E10	Bluetooth	RP-E10-x3FJ2-B
			RP-E11-x3FJ2-B
		Ethernet	RP-E10-x3FJ1-E
			RP-E11-x3FJ1-E

Use main firmware version 1.05 or later, LAN interface firmware version 1.13.01 or later for RP-D10-x27J1-E.

Use main firmware version 1.11 or later, LAN interface firmware version 1.13.01 or later for RP-E10-x3FJ1-E or RP-E11-x3FJ1-E.

RP-E10-x3FJ2-B and RP-E11-x3FJ2-B are the products destined only for Japan.

Table of Contents

Chapter 1	Product Overview	1-1
1.1	Function Provided by SDK	1-1
1.2	SII Print Class Library Overview.....	1-1
1.2.1	SII Print Class Library Configuration	1-1
1.2.2	Function Provided by Library	1-2
1.2.3	Development of Application that Performs Bluetooth Communication with SII Printer.....	1-2
Chapter 2	Product Specification	2-1
2.1	Operating Environment.....	2-1
2.1.1	Applicable iDevice Models	2-1
2.1.2	Applicable OS Versions	2-2
2.1.3	Operating Conditions	2-2
2.1.4	Precaution	2-3
Chapter 3	How to Use library	3-1
3.1	Development Environment for Android Application	3-1
3.2	Provided Files	3-2
3.3	Build Library into Xcode Project	3-3
3.3.1	Objective-C.....	3-3
3.3.2	Swift.....	3-7
Chapter 4	Function of Library	4-1
4.1	Standard Mode and Page Mode.....	4-1
4.1.1	Basic Operation.....	4-1
(1)	Standard mode	4-1
(2)	Page mode	4-2
4.1.2	Text Data Printing in Standard Mode	4-3
4.1.3	Mapping Position of Print Data in Page Mode	4-4
(1)	Print area of page mode	4-4
(2)	Print direction.....	4-4
(3)	Reference point	4-5
4.1.4	Print Data Process at Out of Print Area of Page Mode.....	4-6
4.2	Log File Output Function	4-7
4.2.1	How to Set Log Output.....	4-7
4.2.2	Log Output Settings	4-7
4.2.3	Log File.....	4-7
4.3	API Reference	4-8
4.3.1	SIIPrinterManager Class	4-8
(1)	Method List	4-8

(a) Common method to standard mode	4-9
(b) Dedicated method for standard mode	4-10
(c) Dedicated method for page mode	4-10
(2) Common property list to standard mode and page mode	4-11
(3) Constant List.....	4-12
(a) Printer model constant.....	4-12
(b) Connecting port type constant.....	4-12
(c) Response type constant	4-12
(d) International character setting constant.....	4-13
(e) Codepage constant.....	4-13
(f) Constant used for barcode and PDF417	4-14
(4) Constant List of Enumerated Type.....	4-15
(a) Drawer number (DrawerNum)	4-15
(b) Activation pulse width (PulseWidth)	4-15
(c) Dithering (Dithering).....	4-15
(d) Batch processing selection (TransactionFunction).....	4-16
(e) Bold print (CharacterBold)	4-16
(f) Underline (CharacterUnderline).....	4-16
(g) Reverse print (CharacterReverse).....	4-16
(h) Inversion print (CharacterInversion)	4-17
(i) Character font (CharacterFont)	4-17
(j) Character Scale (CharacterScale).....	4-17
(k) Alignment (PrintAlignment).....	4-18
(l) Barcode symbol (BarcodeSymbol)	4-18
(m) Module size (ModuleSize)	4-19
(n) HRI character print position (HriPosition)	4-20
(o) N:W ratio (NwRatio).....	4-20
(p) Error correction level (ErrorCorrection)	4-21
(q) PDF417 symbol (Pdf417Symbol)	4-21
(r) QR code model (QrModel)	4-22
(s) Data Matrix Module (DataMatrixModule).....	4-22
(t) MaxiCode Mode (MaxiCodeMode).....	4-23
(u) Cutting method (CuttingMethod)	4-23
(v) Print direction (Direction)	4-24
(w) Line style (LineStyle)	4-24
(5) Method Details.....	4-25
(a) Common method to standard mode and page mode	4-25
init Instance.....	4-25
connect Start communicating with a printer (Bluetooth)	4-25
connect Start communicating with a printer (TCP/IP).....	4-26
disconnect Disconnect a printer	4-26
openDrawer Open cash drawer.....	4-27
buzzer Sound buzzer	4-27
externalBuzzer Sound external buzzer	4-28
getStatus Obtain printer status.....	4-28
abort Abort the waiting state of a printer	4-29
registerLogo Register logo (image) to a printer	4-30

unregisterLogo		
	Delete specified logo (image) on a printer	4-30
registerStyleSheet		
	Register style sheet to a printer	4-31
unregisterStyleSheet		
	Delete specified style sheet on a printer	4-31
resetPrinter	Printer hardware reset.....	4-31
getPrinterResponse		
	Obtaining various responses from a printer	4-32
startDiscoveryPrinter		
	Start printer search (Bluetooth).....	4-34
startDiscoveryPrinter		
	Start printer search (TCP/IP)	4-34
cancelDiscoveryPrinter		
	Cancel printer search.....	4-35
getFoundPrinter		
	Obtain searched printer information.....	4-35
getVersion	Get SDK version	4-36
controlTransaction		
	Start/End batch processing	4-36
(b) Dedicated method for standard mode	4-38
sendText	Send text data	4-38
sendTextEx	Send format specified text data	4-38
sendTextEx	Send format specified text data	4-39
printBarcode	Print barcode	4-40
printPDF417	Print PDF417.....	4-43
printQRcode	Print QR code.....	4-44
printDataMatrix		
	Print Data Matrix	4-45
printMaxiCode		
	Print MaxiCode.....	4-45
printGS1DataBarStacked		
	Print GS1 Databar Stacked.....	4-46
printGS1DataBarStackedOmnidirectiona		
	Print GS1 Databar Stacked Omni-directional	4-46
printGS1DataBarExpandedStacked		
	Print GS1 Databar Expanded Stacked	4-46
printAztecCode		
	Print Aztec Code	4-46
cutPaper	Cut paper	4-47
feedPosition	Paper form feed	4-47
sendBinary	Send binary data.....	4-47
sendDataFile	Send specified file	4-47
printLogo	Print specified logo (image) on printer	4-48
printLogo	Print specified logo (image) on printer	4-49
(c) Dedicated method for page mode	4-50
enterPageMode		
	Start page mode.....	4-51

exitPageMode	End page mode	4-51
setPageModeArea	Specify print area of page mode	4-51
setPageModeDirection	Specify print direction of page mode.....	4-53
setPageModeLineSpacing	Specify line spacing of page mode	4-53
printPageMode	Print page mode	4-53
printPageModeText	Send text data of page mode	4-54
printPageModeTextEx	Send format specified text data of page mode	4-54
printPageModeBarcode	Print barcode of page mode.....	4-55
printPageModePDF417	Print PDF417 of page mode	4-57
printPageModeQRcode	Print QR Code of page mode.....	4-59
printPageModeDataMatrix	Print Data Matrix of page mode	4-60
printPageModeMaxiCode	Print MaxiCode of page mode	4-60
printPageModeGS1DataBarStacked	Print GS1 Databar Stacked of page mode.....	4-61
printPageModeGS1DataBarStackedOmnidirectional	Print GS1 Databar Stacked Omni-directional of page mode	4-61
printPageModeGS1DataBarExpandedStacked	Print GS1 Databar Expanded Stacked of page mode	4-62
printPageModeAztecCode	Print Aztec Code of page mode	4-62
sendPageModeBinary	Send binary data of page mode	4-62
printPageModelImageFile	Draw Image file of page mode	4-63
printPageModeRectangle	Draw rectangle image of page mode	4-63
printPageModeLine	Print ruled line of page mode	4-64
printPageModeLogo	Print logo of page mode	4-66
(6) Common property detail to standard mode and page mode	4-67
sendTimeout	Timeout period when sending data.....	4-67
receiveTimeout	Timeout period when receiving data	4-67
internationalCharacter	Set international character set	4-67

codePage	Code page.....	4-68
printerModel	Obtain printer model.....	4-68
portType	Connecting port type	4-68
isConnect	Verify connection state with a printer	4-68
socketKeepingTime	Socket keeping time.....	4-69
delegate	Register delegate	4-69
4.3.2	SIIPrinterInfo Class	4-70
(1)	Method List.....	4-70
(2)	Property List	4-70
(3)	Method Details.....	4-70
	SIIPrinterInfo Constructor.....	4-70
(4)	Property Details	4-71
	name Obtain printer model name	4-71
	mac Obtain MAC address.....	4-71
	ip Obtain IP address	4-71
4.3.3	SIIPrinterException Class	4-72
(1)	Method List.....	4-72
(2)	Property List	4-72
(3)	Constant List.....	4-72
(4)	Method Details.....	4-74
	SIIPrinterException	
	Constructor.....	4-74
(5)	Property Details	4-74
	errorCode Obtain error codes	4-74
	errorMessage Obtain error message	4-74
4.3.4	SIIPrinterManagerDelegate Protocol	4-75
(1)	Method List.....	4-75
(2)	Method Details.....	4-75
	didStatusChange	
	Notify printer status	4-75
4.3.5	SIISSmartLabelManager Class	4-76

Chapter 5 Sample Program 5-1

5.1	Screen Layout.....	5-1
5.2	Precaution.....	5-2

Chapter 6 Disclaimer 6-1

Appendix A Character Set A-1

A.1	Codepage Table (Character Code Table)	A-1
A.2	International Character Set.....	A-10

Appendix B Barcode Size List B-1

B.1	Barcode Size List.....	B-1
B.1.1	printBarcode, printPageModeBarcode	B-1
B.1.2	printPDF417, printPageModePDF417	B-7
B.1.3	printQRCode, printPageModeQRCode.....	B-8
B.1.4	printDataMatrix, printPageModeDataMatrix.....	B-9
B.1.5	printMaxicode, printPageModeMaxicode.....	B-11

Appendix C Open Source Software License

C-1

C.1	MIT License	C-1
C.2	Apache License 2.0	C-2

Chapter 1

Product Overview

This chapter describes the product overview of the SDK.

1.1 Function Provided by SDK

The SII print class library included in the SDK provides applications enabled by iOS device with the functions to use following SII printers: DPU-S245, DPU-S445 (hereinafter referred to as "Mobile printer" or "Mobile"), RP-D10, RP-E10 (hereinafter referred to as "POS printer" or "POS").

Moreover, the SDK includes Xcode projects for iOS device as a sample.

1.2 SII Print Class Library Overview

1.2.1 SII Print Class Library Configuration

The SII print class library (hereinafter referred to as "the library") and the sample programs included in the SDK are located in the section surrounded by dashed lines in the iOS configuration diagram (Figure 1-1). The library consists of two classes: the class which produces printer commands, and the class which controls communication port.

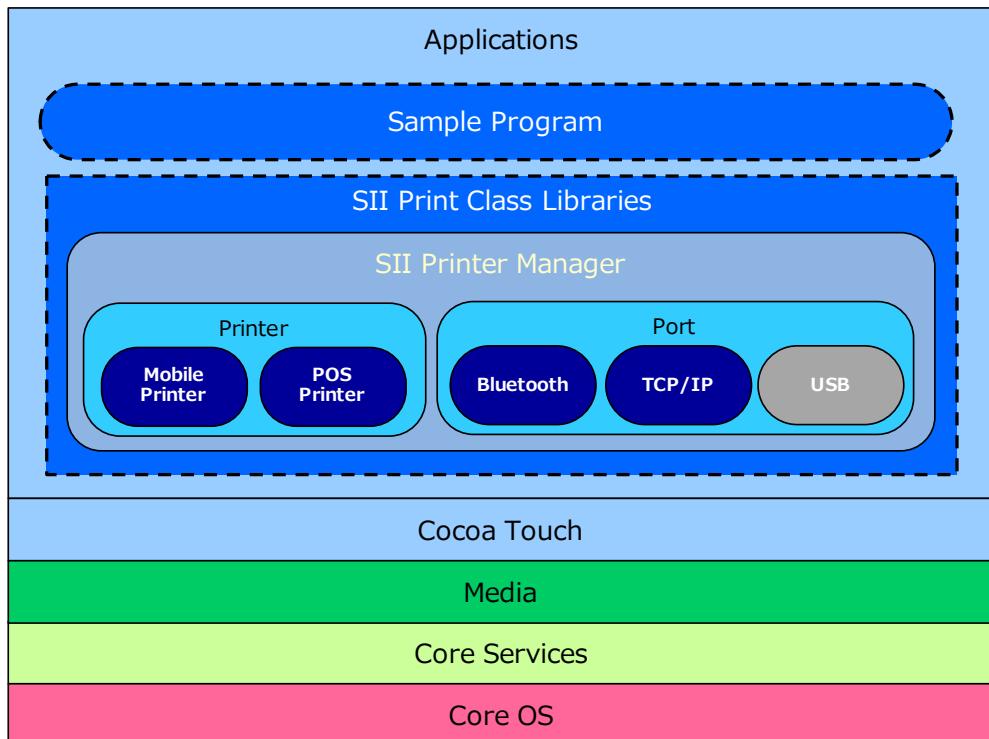


Figure 1-1

1.2.2 Function Provided by Library

By using the library, applications can easily transmit commands and data to a printer through communication port (Bluetooth or TCP/IP) on an iOS device. Also, applications can obtain printer status.

The library provides the following functions.

- Connection/disconnection to/from a printer
- Sending data to a printer (print data and/or commands^{*1})
- Barcode print and 2-dimensional barcode print
- Sending a data file to a printer (print data and/or commands^{*1})
- Cut paper
- Obtaining printer status
- Aborting the waiting state of a printer
- Obtaining various responses from a printer
- Bulk registration of print commands
- Registering a printer status call back function
- Printer search by TCP/IP
- Outputting a log file

*1: Commands that obtains the response from the printer are not available. In order to obtain responses from a printer, use "Obtaining printer status" or "Obtaining various responses from a printer".

- (NOTE)**
- Mobile printer and POS printer do not support the APIs relating to Display, the barcode scanner, or label printing function.
 - Mobile printer does not support the APIs relating to page mode.

1.2.3 Development of Application that Performs Bluetooth Communication with SII Printer

When registering an application that performs Bluetooth communication with Mobile printer or POS printer to App Store, advance application from SII to Apple is necessary. For the details, contact SII.

Chapter 2

Product Specification

This chapter describes the product specification of the library.

2.1 Operating Environment

2.1.1 Applicable iDevice Models

Applicable iDevice Models for the library are shown below.

iPhone models

- iPhone X
- iPhone 8
- iPhone 8 Plus
- iPhone 7
- iPhone 7 Plus
- iPhone SE
- iPhone 6s
- iPhone 6s Plus
- iPhone 6
- iPhone 6 Plus

iPad models

- iPad Pro 12.9-inch (2nd generation)
- iPad Pro 10.5-inch
- iPad (5th generation)
- iPad Pro 9.7-inch
- iPad Pro 12.9-inch (1st generation)
- iPad mini 4
- iPad Air 2
- iPad mini 3

iPod models

- iPod touch (6th generation)

2.1.2 Applicable OS Versions

Applicable OS versions for the library are shown below.

- iOS 15 to 15.7.8
- iPadOS 15 to 15.7.8
- iOS 16 to 16.7.1
- iPadOS 16 to 16.7.1
- iOS 17 to 17.4
- iPadOS 17 to 17.4

2.1.3 Operating Conditions

This section describes the operating conditions for the library in Table 2-1, Table 2-3 and Table 2-3. Set the Function Setting/function selection to the values shown in each table before using the library. See the technical reference of each printer for details about Function Setting/function selection.

Table 2-1 Function Setting of the DPU-S245/DPU-S445 When Using Bluetooth Connection

SWDIP	Function	Value	Setting
2-1	Data Input Mode selection	1	Bluetooth/USB
2-2		1	
4-6	Busy Output When Error Occurs	0	Disable
4-8	Bluetooth Link Key Selection	0	Enable

Table 2-2 Function Setting of RP-D10/RP-E10 When Using TCP/IP Connection

MS	Function	Value	Setting
5-2	Initialized Response Selection	0	Enable
5-3	Data Discard Selection When Error Occurs	0	Enable

Table 2-3 Function Setting of RP-D10/RP-E10 When Using Bluetooth Connection

MS	Function	Value	Setting
5-2	Initialized Response Selection	0	Enable
5-3	Data Discard Selection When Error Occurs	0	Enable
39-1	iOS Automatic Connection Selection	0 / 1	0: Enable ^{*1} 1: Disable

^{*1}: When use `resetPrinter`, select "Enable".

2.1.4 Precaution

This library is not thred-safe. When this library is used on multiple threads, abnormal termination may occur.

When using TCP/IP connection in this library, the communication port cannot be shared with printer drivers or other libraries.

When using TCP/IP connection in this library, wireless LAN access point connected to iOS device and POS printer need to be connected to the same network.

A concurrent connection from multiple apps to one printer is not supported when multiple apps are worked simultaneously by Multitasking on iPad with iPadOS.

Chapter 3

How to Use Library

This chapter describes development environment for iOS application and how to use the library.

3.1 Development Environment for iOS Application

In order to develop iOS applications, following tools are required.

- Xcode 12.0 or later

The description in and after this chapter is on the premise that the environment where each tool is available is prepared.

3.2 Provided Files

The file configuration of the SDK is as follows.

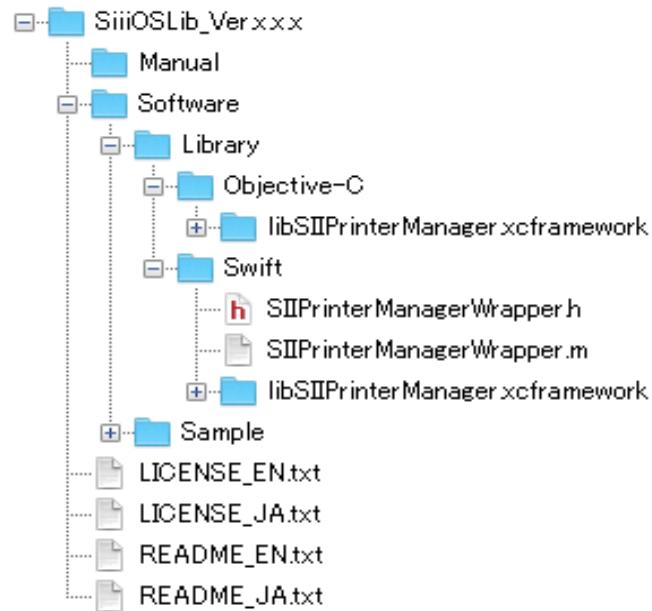


Figure 3-1

The file format of the library is XCFramework. The file name of the library is libSIIPrinterManager.xcframework.

3.3 Build Library into Xcode Project

Using the project of the sample program (SIIlibSample) included in the SDK as an example, this section describes by development language how to build the library into the project.

See "Chapter 5 Sample Program" for sample programs included in the SDK.


Development Language	Description
Objective-C	See "3.3.1 Objective-C" for details to build the library as Objective-C.
Swift	See "3.3.2 Swift" for details to build the library as Swift.

(NOTE) If the following libraries provided SII Print Class Library for iOS Ver. 3.8.0 or earlier versions are included in the target project, delete them all.


- libSIIPrinterManager.a
- SIIPrinterEnum.h
- SIIPrinterException.h
- SIIPrinterManager.h
- SIISSmartLabelManager.h

3.3.1 Objective-C

- (1) Open the Xcode project.
- (2) Drag the following files to any hierarchy in the target project in the [Project Navigator] of the navigation window.
 - libSIIPrinterManager.xcframework

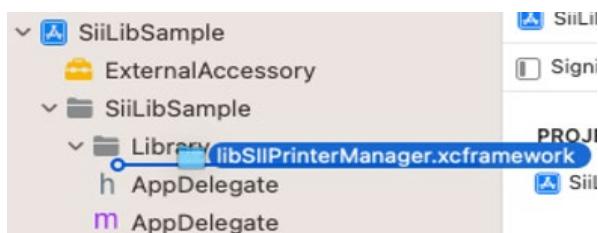


- (3) Check the box [Copy items if needed], and click the [Finish] button.

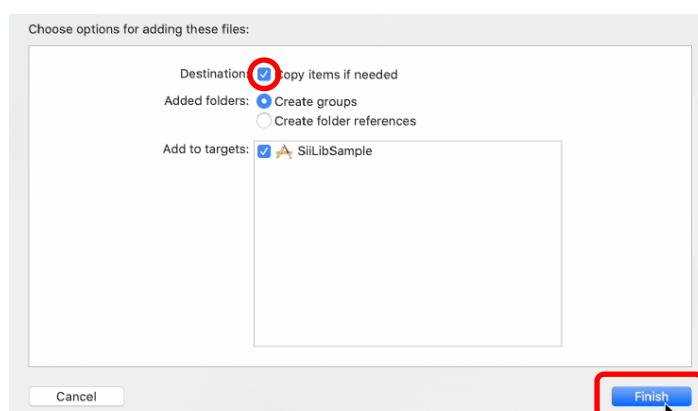


- (4) Build the ExternalAccessory.framework into the project.



Select the target project in the [TARGETS], and open the [General] - [Frameworks, Libraries and Embedded Content].

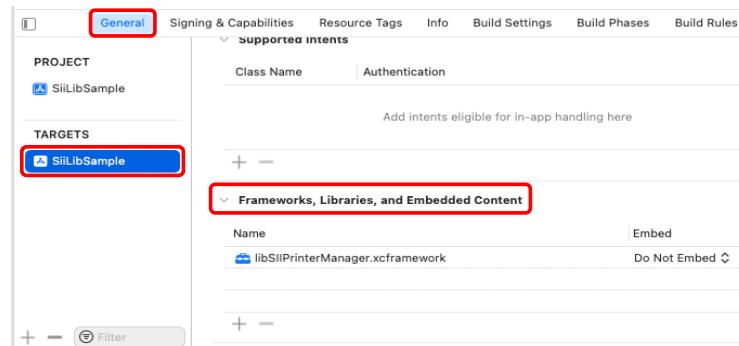


- (5) Click the [+] button opened the [Frameworks, Libraries and Embedded Content].

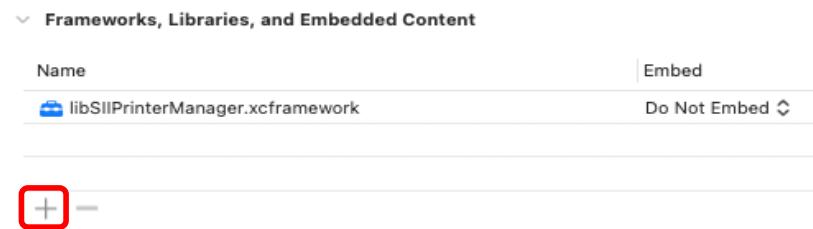

- (6) Select the ExternalAccessory.framework from the list and click the [Add] button.

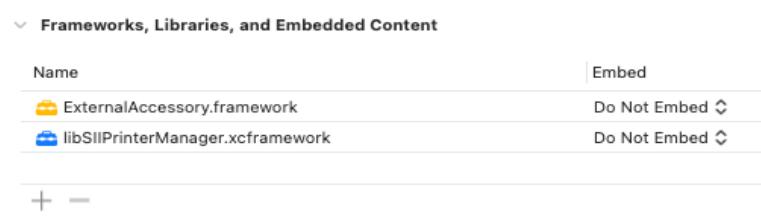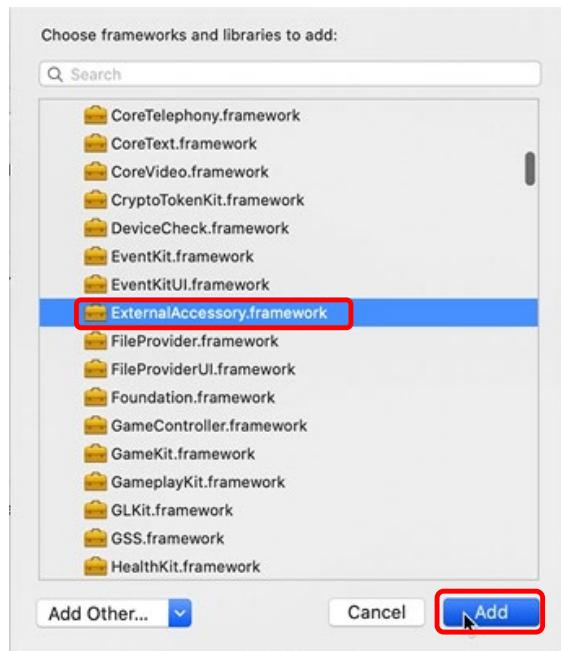

- (7) Set the protocol name to use in the ExternalAccessory.framework. Select property list (.plist) in the [Project Navigator].

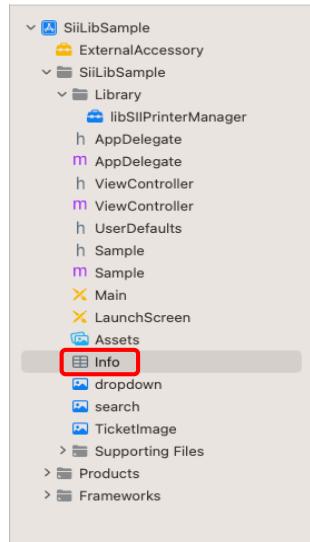

- (8) Select the [Information Property List] - \oplus .

Key	Type	Value
▼ Information Property List	Dictionary	(15 items)
Localization native development re...	String	\$(DEVELOPMENT_LANGUAGE)
Executable file	String	\$(EXECUTABLE_NAME)
Bundle identifier	String	\$(PRODUCT_BUNDLE_IDENTIFIER)
InfoDictionary version	String	6.0

- (9) Select the [Supported external accessory protocols] from the list.

Key	Type	Value
▼ Information Property List	Dictionary	(16 items)
App Category	String	
Supported external accessory p...	String	\$(DEVELOPMENT_LANGUAGE)
Supported interface orientations	String	\$(EXECUTABLE_NAME)
Supported interface orientation...	String	\$(PRODUCT_BUNDLE_IDENTIFIER)
Supported interface orientation...	String	6.0
Supports Automatic Graphics S...	String	\$(PRODUCT_NAME)
Supports Controller User Inter...	String	\$(PRODUCT_BUNDLE_PACKAGE_TYPE)
Supports Document Browser	String	1.0
Supports HDR color mode	String	1

(10) Open the added [Supported external accessory protocols].

The [Item 0] displayed in the opened [Supported external accessory protocols], enter com.sii-ps.siieap as the Value.

SiiLibSample < > SiiLibSample > Info.plist > No Selection		
Key	Type	Value
Information Property List	Dictionary	(16 items)
Supported external accessory prot...	Array	(1 item)
Item 0	String	com.sii-ps.siieap
Localization native development re...	String	\$(DEVELOPMENT_LANGUAGE)
Executable file	String	\$(EXECUTABLE_NAME)
Bundle identifier	String	\$(PRODUCT_BUNDLE_IDENTIFIER)
InfoDictionary version	String	6.0


Use the following import statement when importing libraries.

```
#import <SIIPrinterManager/SIIPrinterManager.h>
```


By completing these procedures, the library function becomes available.

3.3.2 Swift

- (1) Open the Xcode project.
- (2) Drag the following files to any hierarchy in the target project in [Project Navigator] of the navigator window.
 - libSIIPrinterManager.xcframework
 - SIIPrinterManagerWrapper.h
 - SIIPrinterManagerWrapper.m

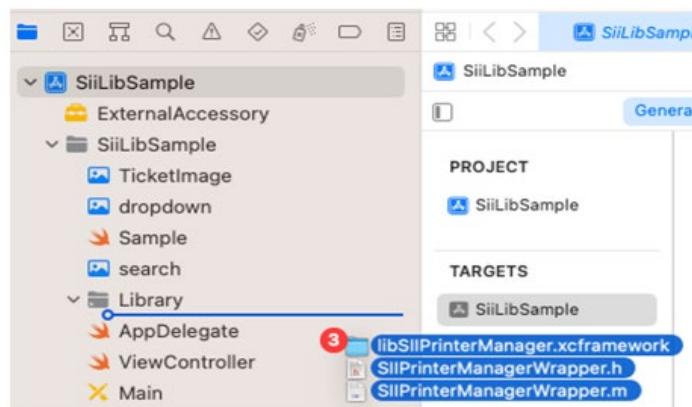


- (3) Check the box [Copy items if needed], click the [Finish] button.

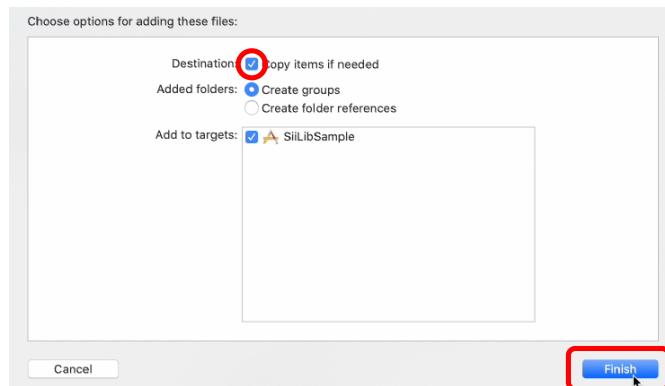

- (4) The dialog is displayed. Select the [Create Bridging Header] button and create xxxxxxxx-Bridging-Header.h.



- (5) Select the created xxxxxxxx-Bridging-Header.h.

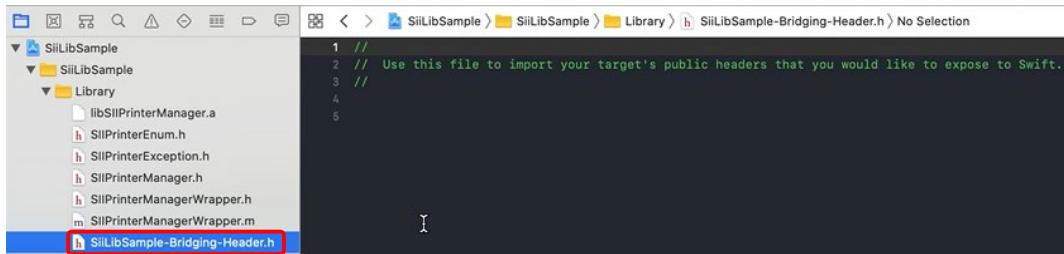

- (6) Import the SIIPrinterManager.h and the SIIPrinterManagerWrapper.h into the xxxxxxxx-Bridging-Header.h.


```

1 //
2 // Use this file to import your target's public headers that you would like to expose to Swift.
3 //
4
5 #import <SIIPrinterManager/SIIPrinterManager.h>
6 #import "SIIPrinterManagerWrapper.h"
7


```

- (7) Build the ExternalAccessory.framework.


Select the target project in the [TARGETS], and open the [General] - [Frameworks, Libraries and Embedded Content].

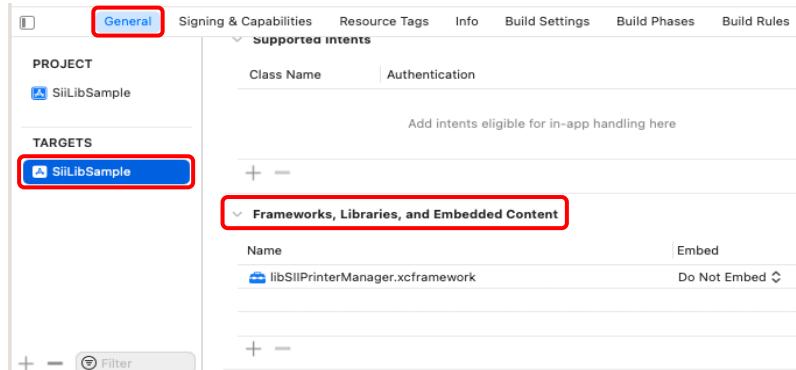

- (8) Click the [+] button opened the [Frameworks, Libraries and Embedded Content].

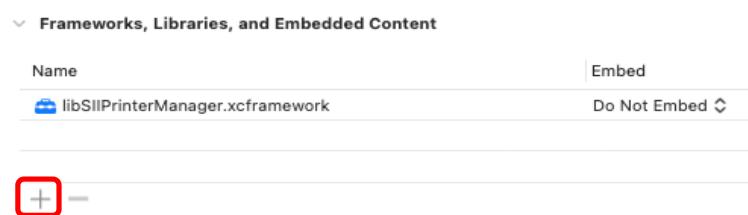

(9) Select the ExternalAccessory.framework from the list and click the [Add] button.

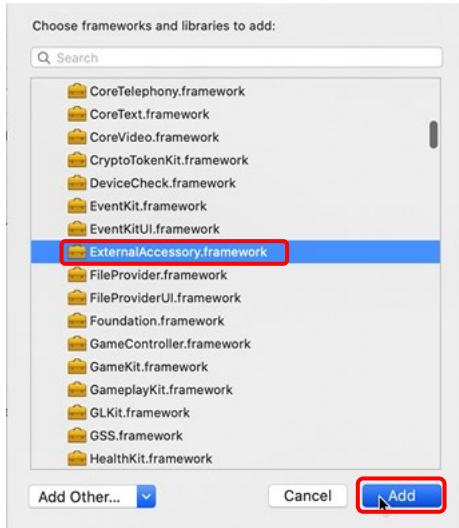


The screenshot shows the "Frameworks, Libraries, and Embedded Content" section of the Project Navigator. It contains a table with two rows:

Name	Embed
ExternalAccessory.framework	Do Not Embed
libSIIPrinterManager.xcframework	Do Not Embed

Below the table are standard UI controls for adding (+) or removing (-) items.

(10) Set the protocol name to use in the ExternalAccessory.framework. Select property list (.plist) in the [Project Navigator].

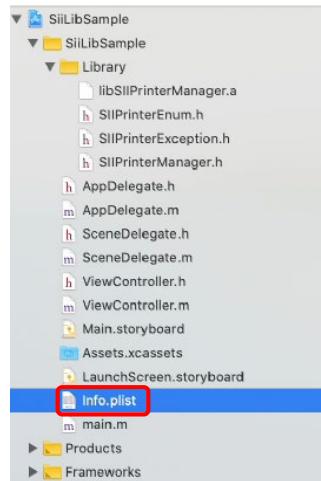

(11) Select the [Information Property List] - \oplus .

The screenshot shows the "Info.plist" editor. At the top, the path "SiiLibSample > SiiLibSample > Info.plist" is visible, followed by "No Selection". Below is a table with three columns: "Key", "Type", and "Value". The first row, "Information Property List", is selected and highlighted with a red circle around its disclosure icon. The table entries are:

Key	Type	Value
Information Property List	Dictionary	(15 items)
Localization native development region	String	\$(DEVELOPMENT_LANGUAGE)
Executable file	String	\$(EXECUTABLE_NAME)
Bundle identifier	String	\$(PRODUCT_BUNDLE_IDENTIFIER)
InfoDictionary version	String	6.0

(12) Select the [Supported external accessory protocols] from the list.

Key	Type	Value
Information Property List Dictionary (16 items)		
App Category	String	
Supported external accessory p...	String	\$DEVELOPMENT_LANGUAGE
Supported interface orientations	String	\$EXECUTABLE_NAME
Supported interface orientation...	String	\$PRODUCT_BUNDLE_IDENTIFIER
Supported interface orientation...	String	6.0
Supports Automatic Graphics S...	String	\$PRODUCT_NAME
Supports Controller User Inter...	String	\$PRODUCT_BUNDLE_PACKAGE_TYPE
Supports Document Browser	String	1.0
Supports HDR color mode	String	1

(13) Open the added [Supported external accessory protocols].

The [Item 0] displayed in the opened [Supported external accessory protocols], enter com.sii-ps.siieap as the Value.

Key	Type	Value
Information Property List Dictionary (16 items)		
Supported external accessory prot...	Array	(1 item)
Item 0	String	com.sii-ps.siieap
Localization native development re...	String	\$DEVELOPMENT_LANGUAGE
Executable file	String	\$EXECUTABLE_NAME
Bundle identifier	String	\$PRODUCT_BUNDLE_IDENTIFIER
InfoDictionary version	String	6.0

By completing these procedures, the library function becomes available.

Chapter 4

Function of Library

This chapter describes the APIs of each class implemented in the library.

4.1 Standard Mode and Page Mode

4.1.1 Basic Operation

There are two printing modes "Standard mode" and "Page mode" in the library.
The "Standard mode" and "Page mode" are described below.


"Page mode" is supported only by POS printer.

(1) Standard mode

Standard mode is the mode to perform the printing in sequence.

Sample print command

- ① Send text data
- ② Print barcode
- ③ Send specified file (Specify an image file)

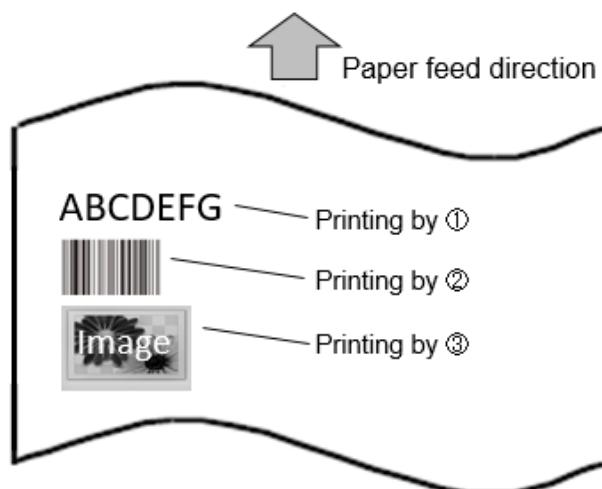

Standard mode suits the printing with an unfixed length such as a receipt.

(2) Page mode


Page mode is the mode to perform the printing on a per-page basis.

In page mode, the print area of page mode is allocated at first, and then print data is mapped on an arbitrary position of the print area.

The mapped print data is printed by the print method of page mode.

Sample print command

- ① Start page mode
- ② Specify print area of page mode
- ③ Send text data of page mode
- ④ Print barcode of page mode
- ⑤ Draw image file of page mode
- ⑥ Print page mode (print the data of ③④⑤ on the print area of ②)
- ⑦ End page mode

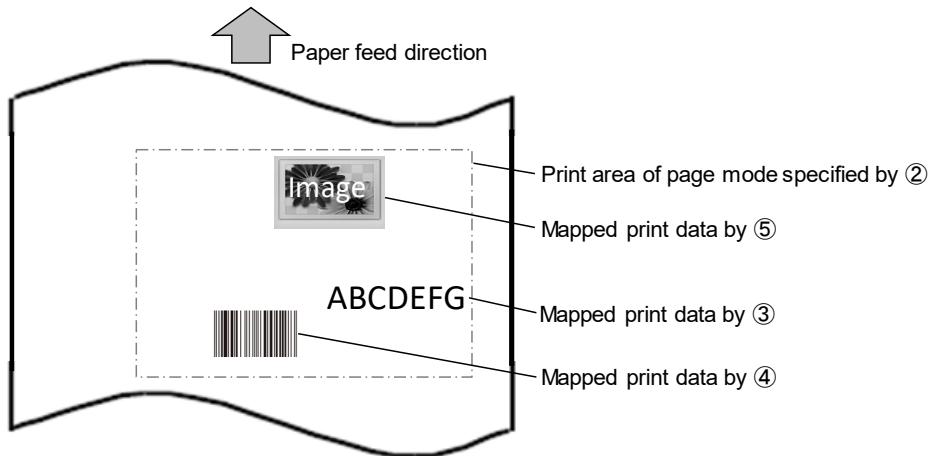

Page mode suits the printing for the followings.

- The printing with a fixed length.
- The printing with the coordinate determination of the character starting position or the ruled line printing position.

4.1.2 Text Data Printing in Standard Mode


The text data in standard mode is printed each one line.

The text data is stored in the printer when the text data less than one line is specified.


The stored text data is printed by either the following conditions.

- The text data filling for one line is specified.
- Line Feed code is specified.

- **The print process when the text data filling for one line is specified.**

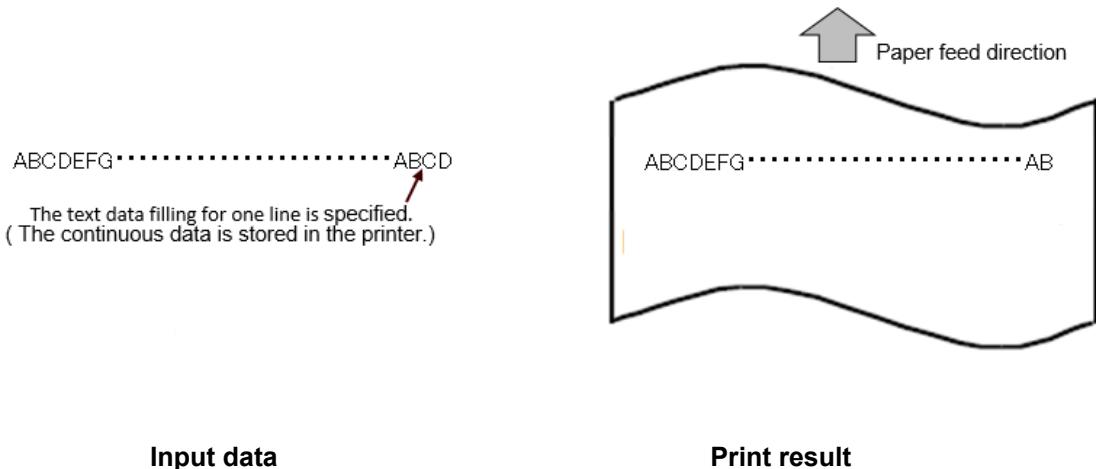

- **The print process when Line Feed code is specified.**

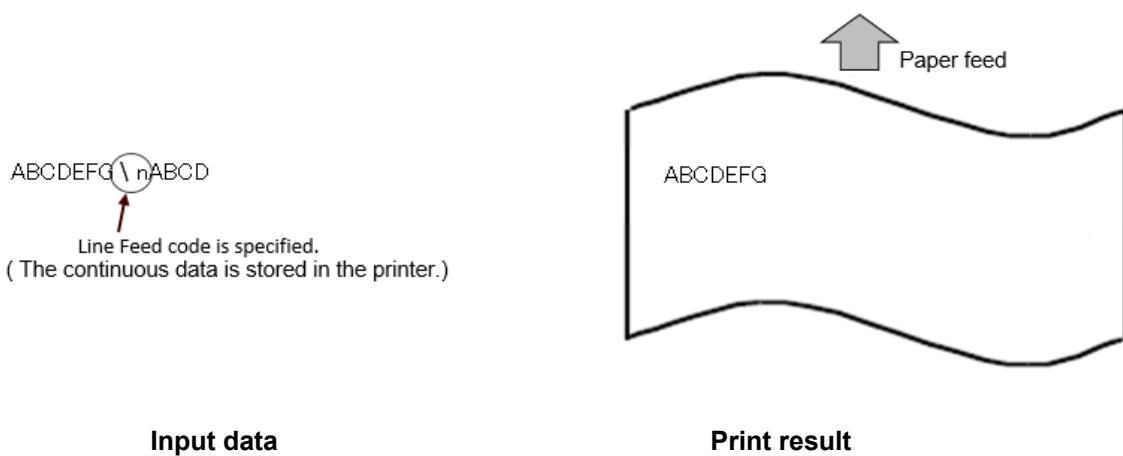

4.1.3 Mapping Position of Print Data in Page Mode


In page mode, the mapping position of print data is determined by print area, print direction, and reference point.

This section describes the print area, print direction, and reference point.

(1) Print area of page mode

The print area of page mode is specified against the print area of the printer by the print area origin, and the width and the height of page mode. The view of the print area is shown in the following figures.


The print area of page mode can be specified more than one.

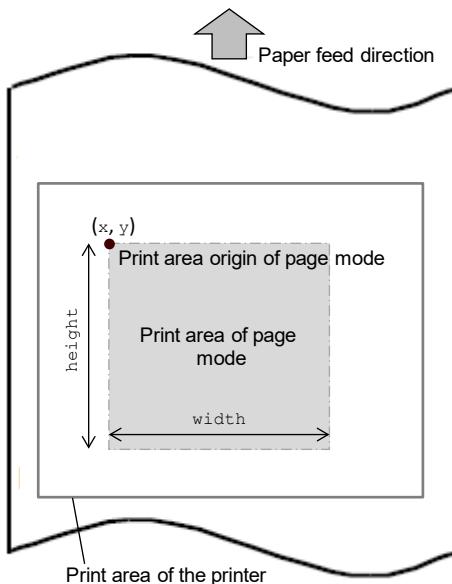

(2) Print direction

Specify the print direction at setting the print area of page mode.

The starting point is changed depending on specifying the print direction for each direction. The relation between the print direction and the starting point is shown in the figure below.

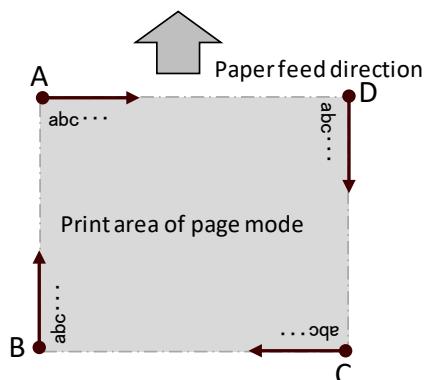


- Starting point: Upper left (A on the figure),
- Starting point: Left below (B on the figure),
- Starting point: Right below (C on the figure),
- Starting point: Upper right (D on the figure),

- Print direction: Left to Right
- Print direction: Below to Upper
- Print direction: Right to Left
- Print direction: Upper to Below

(3) Reference point

The relation between the reference point for mapping data and each print element (text, image file, logo, and barcode, etc.) is shown in the figures below.

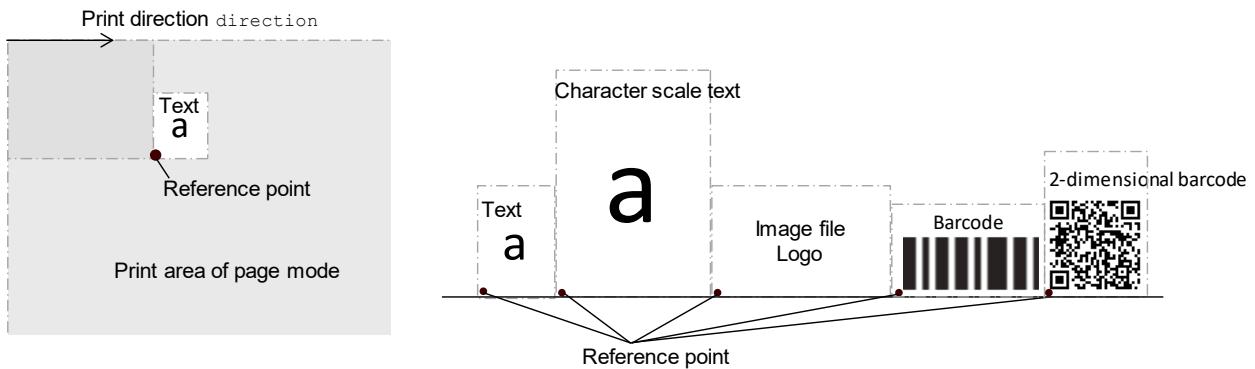


(NOTE) The reference point cannot be specified out of the print area of page mode.

4.1.4 Print Data Process at Out of Print Area of Page Mode


This section describes the process when mapped data is to be mapped on out of the print area of page mode.

Type of Print Data		
Text	Barcode, 2-dimensional Barcode	Image File, Logo, Rectangle, Ruled Line
ABC		

(1) The print data is mapped on the upper of the print area of page mode.

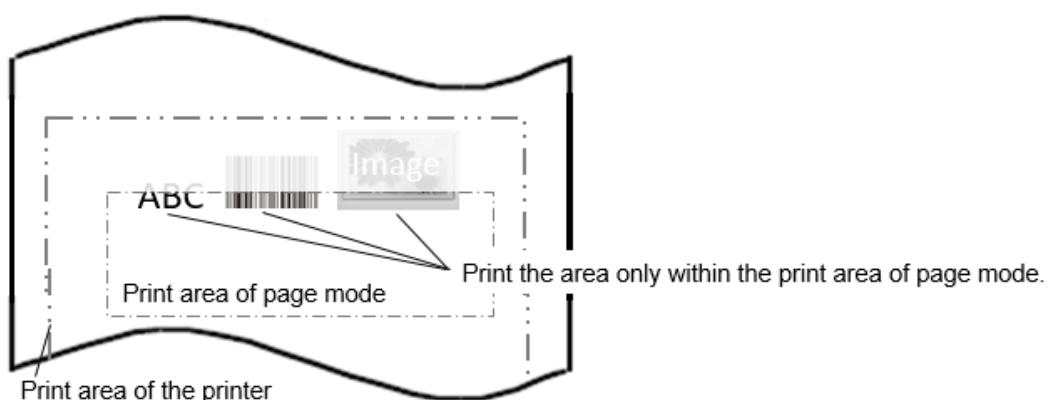

(2) The print data is mapped on the right of print area of page mode.

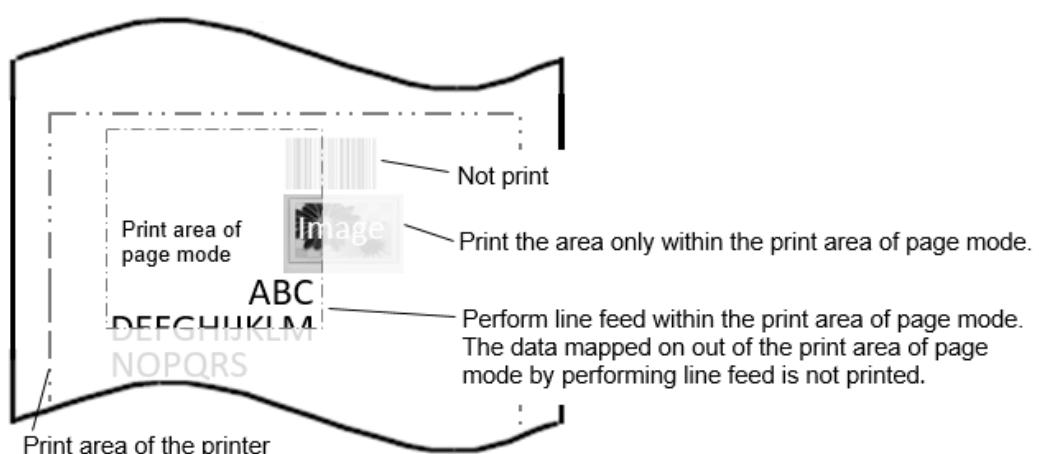

(NOTE) Read error or incorrect reading may occur when the part of mapped barcode data is on out of the print area of page mode.

4.2 Log File Output Function

The logs can be retrieved and the log files can be output using the library.

4.2.1 How to Set Log Output

Log output settings can be configured by adding the config.ini file with the following content to the Documents folder of the ios application that incorporates the library.

config.ini

```
LOGLEVEL=x  
LOGSIZEMAX=xMB  
LOGOUTPUT=x
```

Reference: See "4.2.2 Log Output Settings" for details on the settings for x.

4.2.2 Log Output Settings

Item	Description	Settings
LOGLEVEL	Log level	0 : Not record the log. 1 : Records an error log when SIIPrinterException is thrown. 2 : Records API execution history.
LOGSIZEMAX	Log file maximum size	1MB : Log file maximum size is 1 MB 5MB : Log file maximum size is 5 MB 10MB : Log file maximum size is 10 MB 50MB : Log file maximum size is 50 MB
LOGOUTPUT	Console output enabled/disabled	0 : Console output is disabled 1 : Console output is enabled

4.2.3 Log File

Log files are saved as local files in the iOS application that incorporates the library.

Log file name : PrinterManagerX.log (range of X is 0 to 4)

The 1st log file is created as PrinterManager0.log. If the log file maximum size is exceeded, changes the file name to PrinterManager1.log and creates a new PrinterManager0.log.

Up to 5 log files can be created.

4.3 API Reference

This section describes API in each class included in this library. This manual describes it as follows.

Class Name	Description
SIIPrinterManager	Class that provides the API used for communication with the printer and for printing. See " 4.3.1 SIIPrinterManager Class ".
SIIPrinterInfo	Class that stores the printer information searched by printer searching method. See " 4.3.2 SIIPrinterInfo Class ".
SIIPrinterException	Exception class that is thrown at API call. See " 4.3.3 SIIPrinterException Class ".
SIIPrinterManagerDelegate	API that gets notice from the printer. See " 4.3.4 SIIPrinterManagerDelegate Protocol ".
SIISmartLabelManager	Provides the API to specify label files or replace data.

- (NOTE) • Mobile printer and POS printer do not support the APIs relating to Display, the barcode scanner, or label printing function.
• Mobile printer does not support the APIs relating to page mode.

4.3.1 SIIPrinterManager Class

(1) Method List

Methods provided by the **SIIPrinterManager** class are shown in the following table.
"Standard mode" or "Page mode" can be selected in the **SIIPrinterManager** class.
The available methods vary according to whether the target printer is the mobile printer or the POS printer.

Method	Description
Common method to standard mode and page mode	The valid methods in standard mode and page mode. See "4.3.1(1)(a) Common method to standard mode and page mode" for the methods.
Dedicated method for standard mode	The valid methods in standard mode. See "4.3.1(1)(b) Dedicated method for standard mode" for the methods.
Dedicated method for page mode	The valid methods in page mode. See "4.3.1(1)(c) Dedicated method for page mode" for the methods.

(a) Common method to standard mode and page mode

Methods provided by the common method to standard mode and page mode are shown in the following table. See "4.3.1(5)(a) Common method to standard mode and page mode" for details of the common methods.

**Table 4-1 Common Method to Standard Mode and Page Mode
in SIIPrinterManager Class**

Method	Function Summary	Target	
		Mobile	POS
<code>init</code>	Instance	Supported	Supported
<code>connect</code>	Start communicating with a printer (Bluetooth)	Supported	Supported
<code>connect</code>	Start communicating with a printer (TCP/IP)	Not supported	Supported
<code>disconnect</code>	Disconnect a printer	Supported	Supported
<code>openDrawer</code>	Open cash drawer	Not supported	Supported
<code>buzzer</code>	Sound buzzer	Not supported	Supported
<code>externalBuzzer</code>	Sound external buzzer	Not supported	Not supported
<code>getStatus</code>	Obtain printer status	Supported	Supported
<code>abort</code>	Abort the waiting state of a printer	Supported	Supported
<code>registerLogo</code>	Register logo (image) to a printer	Supported ^{*1}	Supported ^{*1}
<code>unregisterLogo</code>	Delete specified logo (image) on a printer	Supported	Supported
<code>registerStyleSheet</code>	Register style sheet to a printer	Not supported	Supported
<code>unregisterStyleSheet</code>	Delete specified style sheet on a printer	Not supported	Supported
<code>resetPrinter</code>	Printer hardware reset	Not supported	Supported
<code>getPrinterResponse</code>	Obtain various responses from a printer	Supported ^{*1}	Supported ^{*1}
<code>startDiscoveryPrinter</code>	Start searching printer (Bluetooth)	Supported	Supported
<code>startDiscoveryPrinter</code>	Start searching printer (TCP/IP)	Not supported	Supported
<code>cancelDiscoveryPrinter</code>	Cancel printer search	Not supported	Supported
<code>getFoundPrinter</code>	Obtain searched printer information	Not supported	Supported
<code>getVersion</code>	Get SDK version	Supported	Supported
<code>controlTransaction</code>	Start/End batch processing	Supported	Supported

*1: Provided function varies depending on the target printer.

(b) Dedicated method for standard mode

Methods provided by the dedicated method for standard mode are shown in the following table. See "4.3.1(5)(b) Dedicated method for standard mode" for details of the specified methods.

**Table 4-2 Dedicated Method for Standard Mode
in SIIPrinterManager Class**

Method	Function Summary	Target	
		Mobile	POS
<code>sendText</code>	Send text data	Supported	Supported
<code>sendTextEx</code>	Send format specified text data	Supported	Not supported
<code>sendTextEx</code>	Send format specified text data	Not supported	Supported
<code>printBarcode</code>	Print barcode	Supported	Supported
<code>printPDF417</code>	Print PDF417	Supported	Supported
<code>printQRcode</code>	Print QR code.	Supported	Supported
<code>printDataMatrix</code>	Print Data Matrix	Supported	Supported
<code>printMaxiCode</code>	Print MaxiCode	Supported	Supported
<code>printGS1DataBarStacked</code>	Print GS1 Databar Stacked	Not supported	Not supported
<code>printGS1DataBarStackedOmnidirectional</code>	Print GS1Databar Stacked Omni-directional	Not supported	Not supported
<code>printGS1DataBarExpandedStacked</code>	Print GS1Databar Expanded Stacked	Not supported	Not supported
<code>printAztecCode</code>	Print AztecCode	Not supported	Not supported
<code>cutPaper</code>	Cut paper	Not supported	Supported
<code>feedPosition</code>	Paper form feed	Not supported	Not supported
<code>sendBinary</code>	Send binary data	Supported	Supported
<code>sendDataFile</code>	Send specified file	Supported ^{*1}	Supported ^{*1}
<code>printLogo</code>	Print specified logo on a printer	Supported	Not supported
<code>printLogo</code>	Print specified logo on a printer	Not supported	Supported

*1: Provided function varies depending on the target printer.

(c) Dedicated method for page mode

Methods provided by the dedicated method for page mode are shown in the following table. See "4.3.1(5)(c) Dedicated method for page mode" for details of the specified methods.

**Table 4-3 Dedicated Method for Page Mode
in SIIPrinterManager Class**

Method	Function Summary	Target	
		Mobile	POS
<code>enterPageMode</code>	Start page mode	Not supported	Supported
<code>exitPageMode</code>	End page mode	Not supported	Supported
<code>setPageModeArea</code>	Specify print area of page mode	Not supported	Supported
<code>setPageModeDirection</code>	Specify print direction of page mode	Not supported	Supported
<code>setPageModeLineSpacing</code>	Specify line spacing of page mode	Not supported	Supported
<code>printPageMode</code>	Print page mode	Not supported	Supported
<code>printPageModeText</code>	Send text data of page mode	Not supported	Supported

Method	Function Summary	Target	
		Mobile	POS
<code>printPageModeTextEx</code>	Send format specified text data of page mode	Not supported	Supported
<code>printPageModeBarcode</code>	Print barcode of page mode	Not supported	Supported
<code>printPageModePDF417</code>	Print PDF417 of page mode	Not supported	Supported
<code>printPageModeQRcode</code>	Print QR Code of page mode	Not supported	Supported
<code>printPageModeDataMatrix</code>	Print Data Matrix of page mode	Not supported	Supported
<code>printPageModeGS1DataBarsStacked</code>	Print GS1 Databar Stacked of page mode	Not supported	Not supported
<code>printPageModeGS1DataBarsStackedOmnidirectional</code>	Print GS1 Databar Stacked Omnidirectional of page mode	Not supported	Not supported
<code>printPageModeGS1DataBarExpandedStacked</code>	Print GS1 Databar Expanded Stacked of page mode	Not supported	Not supported
<code>printPageModeAztecCode</code>	Print Aztec Code of page mode	Not supported	Not supported
<code>printPageModeMaxiCode</code>	Print MaxiCode of page mode	Not supported	Supported
<code>sendPageModeBinary</code>	Send binary data of page mode	Not supported	Supported
<code>printPageModeImageFile</code>	Draw image file of page mode	Not supported	Supported
<code>printPageModeRectangle</code>	Draw rectangle image of page mode	Not supported	Supported
<code>printPageModeLine</code>	Print ruled line of page mode	Not supported	Supported
<code>printPageModeLogo</code>	Print logo of page mode	Not supported	Supported

(2) Common property list to standard mode and page mode

Properties provided by the `SIIPrinterManager` class are shown in the following table.

Table 4-4 Property in `SIIPrinterManager` Class

Property	Access	Function Summary	Target	
			Mobile	POS
<code>sendTimeout</code>	R/W	Timeout period when sending data	Supported	Supported
<code>receiveTimeout</code>	R/W	Timeout period when receiving data	Supported	Supported
<code>internationalCharacter</code>	R/W	Set international character	Supported	Supported
<code>codePage</code>	R/W	Code page	Supported	Supported
<code>printerModel</code>	R	Obtain printer model	Supported	Supported
<code>portType</code>	R	Connecting port type	Supported	Supported
<code>isConnect</code>	R	Verify connection state with a printer	Supported	Supported
<code>socketKeepingTime</code>	R/W	Setting/Obtaining Socket keeping time	Not supported	Supported
<code>delegate</code>	R/W	Register delegate	Supported	Supported

(3) Constant List

(a) Printer model constant

Constants used for obtaining the printer model are shown in the following table.

Table 4-5 Printer Model Constant

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_PRINTER_MODEL_DPU_S245	DPU-S245	284	Supported	Not supported
SII_PM_PRINTER_MODEL_DPU_S445	DPU-S445	281	Supported	Not supported
SII_PM_PRINTER_MODEL_RP_D10	RP-D10	295	Not supported	Supported
SII_PM_PRINTER_MODEL_RP_E10	RP-E10	291	Not supported	Supported

(b) Connecting port type constant

Constants used for obtaining the connecting port type are shown in the following table.

Table 4-6 Port Type Constant

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_PRINTER_PORT_TYPE_BLUETOOTH	Bluetooth	0	Supported	Supported
SII_PM_PRINTER_PORT_TYPE_TCP	TCP/IP	2	Not supported	Supported

(c) Response type constant

Constants used for obtaining various responses from the printer are shown in the following table.

Table 4-7 Response Type Constant

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_PRINTER_RESPONSE_REQUEST	Execution response request	0	Supported	Supported
SII_PM_PRINTER_RESPONSE_USER_AREA	Send remaining capacity of user area	1	Supported	Supported
SII_PM_PRINTER_RESPONSE_ARRANGE_USER_AREA	Send remaining capacity of user area after defragment	2	Not supported	Supported
SII_PM_PRINTER_RESPONSE_NV_GRAPHICS	Send NV graphics memory capacity	3	Not supported	Supported
SII_PM_PRINTER_RESPONSE_KEY_CODE	Send key code list of defined NV graphics	4	Not supported	Supported
SII_PM_PRINTER_RESPONSE_BATTERY_STATUS	Battery voltage state	5	Supported	Not supported
SII_PM_PRINTER_RESPONSE_FIRMWARE_VERSION	Send firmware version	6	Not supported	Supported

(d) International character setting constant

Constants used for setting/obtaining the international character set are shown in the following table.

Table 4-8 International Character Setting Constant

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_COUNTRY_USA	USA	0	Supported	Supported
SII_PM_COUNTRY_FRANCE	France	1	Supported	Supported
SII_PM_COUNTRY_GERMANY	Germany	2	Supported	Supported
SII_PM_COUNTRY_ENGLAND	United Kingdom	3	Supported	Supported
SII_PM_COUNTRY_DENMARK_1	Denmark I	4	Supported	Supported
SII_PM_COUNTRY_SWEDEN	Sweden	5	Supported	Supported
SII_PM_COUNTRY_ITALY	Italy	6	Supported	Supported
SII_PM_COUNTRY_SPAIN	Spain I	7	Supported	Supported
SII_PM_COUNTRY_JAPAN	Japan	8	Supported	Supported
SII_PM_COUNTRY_NORWAY	Norway	9	Supported	Supported
SII_PM_COUNTRY_DENMARK_2	Denmark II	10	Supported	Supported
SII_PM_COUNTRY_SPAIN_2	Spain II	11	Supported	Supported
SII_PM_COUNTRY_LATIN_AMERICA	Latin America	12	Supported	Supported
SII_PM_COUNTRY_ARABIA	Arabia	17	Not supported	Supported

(e) Codepage constant

Constants used for setting/obtaining codepage are shown in the following table.

Table 4-9 Codepage constant

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_CODE_PAGE_437	USA, Standard Europe (Code Page437)	0	Not supported	Supported
SII_PM_CODE_PAGE_KATAKANA	Katakana	1	Supported	Supported
SII_PM_CODE_PAGE_850	Multilingual (Code Page850)	2	Not supported	Supported
SII_PM_CODE_PAGE_860	Portuguese (Code Page860)	3	Not supported	Supported
SII_PM_CODE_PAGE_863	Canadian-French (Code Page863)	4	Not supported	Supported
SII_PM_CODE_PAGE_865	Nordic (Code Page865)	5	Not supported	Supported
SII_PM_CODE_PAGE_1252	Latin (Code Page1252)	16	Supported	Supported
SII_PM_CODE_PAGE_852	Eastern Europe (Code Page852)	18	Not supported	Supported
SII_PM_CODE_PAGE_858	Euro (Code Page858)	19	Not supported	Supported
SII_PM_CODE_PAGE_864 ¹⁺²	Arabic (Code Page864)	37	Not supported	Supported
SII_PM_CODE_PAGE_1250	Central European (Code Page1250)	45	Not supported	Supported
SII_PM_CODE_PAGE_1251	Cyrillic (Code Page1251)	46	Not supported	Supported
SII_PM_CODE_PAGE_1253 ³	Greek (Code Page1253)	47	Not supported	Supported

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_CODE_PAGE_1254	Turkish (Code Page1254)	48	Not supported	Supported

Note: This library does not support other than the above code page.

*1: When **SII_PM_CODE_PAGE_864** is specified, 20ACh of the Unicode cannot be printed.

*2: When **SII_PM_CODE_PAGE_864** is specified, Font B cannot be printed.

*3: When **SII_PM_CODE_PAGE_1253** is specified, 00AAh of the Unicode cannot be printed.

(f) Constant used for barcode and PDF417

Constants used for printing barcode and PDF417 are shown in the following table.

Table 4-10 Constant for Barcode and PDF417

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_BARCODE_HEIGHT_DEFAULT	Default value of barcode height	162	Supported	Supported
SII_PM_PDF417_MODULE_HEIGHT_DEFAULT	Default value of PDF417 height	10	Supported	Supported
SII_PM_PDF417_ROW_AUTO	Automatic selection of the number of rows	0	Supported	Supported
SII_PM_PDF417_COLUMN_AUTO	Automatic selection of the number of columns	0	Supported	Supported

(4) Constant List of Enumerated Type

(a) Drawer number (**DrawerNum**)

Enumerated type constants used for drawer number are shown in the following table.

Table 4-11 Drawer Number (DrawerNum)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_DRAWER_1	Drawer 1	Not supported	Supported
SII_PM_DRAWER_2	Drawer 2	Not supported	Supported

(b) Activation pulse width (**PulseWidth**)

Enumerated type constants used for activation pulse width are shown in the following table.

Table 4-12 Activation Pulse Width (PulseWidth)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_ON_OFF_TIME_100	ON/OFF time 100 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_200	ON/OFF time 200 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_300	ON/OFF time 300 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_400	ON/OFF time 400 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_500	ON/OFF time 500 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_600	ON/OFF time 600 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_700	ON/OFF time 700 millisecond	Not supported	Supported
SII_PM_ON_OFF_TIME_800	ON/OFF time 800 millisecond	Not supported	Supported

(c) Dithering (**Dithering**)

Enumerated type constants used for dithering are shown in the following table.

Table 4-13 Dithering (Dithering)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_DITHERING_DISABLE	Dithering is disable	Supported	Supported
SII_PM_DITHERING_ERRORDIFFUSION	Dithering is enable	Supported	Supported

(d) Batch processing selection (**TransactionFunction**)

Enumerated type constants used for batch processing selection are shown in the following table.

Table 4-14 Batch Processing Selection (TransactionFunction)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_TRANSACTION_CLEAR	Clear batch transaction	Supported	Supported
SII_PM_TRANSACTION_START	Start batch transaction	Supported	Supported
SII_PM_TRANSACTION_PRINT	Finish batch printing and batch processing	Supported	Supported

(e) Bold print (**CharacterBold**)

Enumerated type constants used for bold print are shown in the following table.

Table 4-15 Bold Print (CharacterBold)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_BOLD_CANCEL	Release bold print	Supported	Supported
SII_PM_BOLD	Specify bold print	Supported	Supported

(f) Underline (**CharacterUnderline**)

Enumerated type constants used for underline are shown in the following table.

Table 4-16 Underline (CharacterUnderline)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_UNDERLINE_CANCEL	Release underline print	Supported	Supported
SII_PM_UNDERLINE_1	Specify 1 dot width underline print	Supported	Supported
SII_PM_UNDERLINE_2	Specify 2 dots width underline print	Supported	Supported

(g) Reverse print (**CharacterReverse**)

Enumerated type constants used for reverse print are shown in the following table.

Table 4-17 Reverse Print (CharacterReverse)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_REVERSE_CANCEL	Release reverse print	Not Supported	Supported
SII_PM_REVERSE	Specify reverse print	Not Supported	Supported

(h) Inversion print (**CharacterInversion**)

Enumerated type constants used for inversion print are shown in the following table.
Inversion print cannot be added to the text data before inserting a new line feed.

Table 4-18 Character Inversion (CharacterInversion)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_INVERSION_CANCEL	Cancel inversion print	Supported	Supported
SII_PM_INVERSION	Specify inversion print	Supported	Supported

(i) Character font (**CharacterFont**)

Enumerated type constants used for Character font are shown in the following table.

Table 4-19 Character Font (CharacterFont)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_FONT_A	Font A (24 × 12)	Supported	Supported
SII_PM_FONT_B	Font B (16 × 8)	Supported	Supported

(j) Character Scale (**CharacterScale**)

Enumerated type constants used for character scale are shown in the following table.

Table 4-20 Character Scale (CharacterScale)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_VARTICAL_1_HORIZONTAL_1	Height × 1 and width × 1	Supported	Supported
SII_PM_VARTICAL_1_HORIZONTAL_2	Height × 1 and width × 2	Supported	Supported
SII_PM_VARTICAL_1_HORIZONTAL_3	Height × 1 and width × 3	Not supported	Supported
SII_PM_VARTICAL_1_HORIZONTAL_4	Height × 1 and width × 4	Not supported	Supported
SII_PM_VARTICAL_2_HORIZONTAL_1	Height × 2 and width × 1	Supported	Supported
SII_PM_VARTICAL_2_HORIZONTAL_2	Height × 2 and width × 2	Supported	Supported
SII_PM_VARTICAL_2_HORIZONTAL_3	Height × 2 and width × 3	Not supported	Supported
SII_PM_VARTICAL_2_HORIZONTAL_4	Height × 2 and width × 4	Not supported	Supported
SII_PM_VARTICAL_2_HORIZONTAL_6	Height × 2 and width × 6	Not supported	Supported
SII_PM_VARTICAL_3_HORIZONTAL_1	Height × 3 and width × 1	Not supported	Supported
SII_PM_VARTICAL_3_HORIZONTAL_2	Height × 3 and width × 2	Not supported	Supported
SII_PM_VARTICAL_3_HORIZONTAL_3	Height × 3 and width × 3	Not supported	Supported
SII_PM_VARTICAL_3_HORIZONTAL_4	Height × 3 and width × 4	Not supported	Supported
SII_PM_VARTICAL_4_HORIZONTAL_1	Height × 4 and width × 1	Not supported	Supported
SII_PM_VARTICAL_4_HORIZONTAL_2	Height × 4 and width × 2	Not supported	Supported
SII_PM_VARTICAL_4_HORIZONTAL_3	Height × 4 and width × 3	Not supported	Supported
SII_PM_VARTICAL_4_HORIZONTAL_4	Height × 4 and width × 4	Not supported	Supported
SII_PM_VARTICAL_4_HORIZONTAL_6	Height × 4 and width × 6	Not supported	Supported

Constant Name	Description	Target	
		Mobile	POS
SII_PM_VERTICAL_4_HORIZONTAL_8	Height × 4 and width × 8	Not supported	Supported
SII_PM_VERTICAL_6_HORIZONTAL_2	Height × 6 and width × 2	Not supported	Supported
SII_PM_VERTICAL_6_HORIZONTAL_4	Height × 6 and width × 4	Not supported	Supported
SII_PM_VERTICAL_6_HORIZONTAL_6	Height × 6 and width × 6	Not supported	Supported
SII_PM_VERTICAL_6_HORIZONTAL_8	Height × 6 and width × 8	Not supported	Supported
SII_PM_VERTICAL_8_HORIZONTAL_4	Height × 8 and width × 4	Not supported	Supported
SII_PM_VERTICAL_8_HORIZONTAL_6	Height × 8 and width × 6	Not supported	Supported
SII_PM_VERTICAL_8_HORIZONTAL_8	Height × 8 and width × 8	Not supported	Supported

(k) Alignment (**PrintAlignment**)

Enumerated type constants used for alignment are shown in the following table.
Alignment cannot be added to the text data before inserting a new line feed.

Table 4-21 Alignment (**PrintAlignment**)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_ALIGNMENT_LEFT	Align left	Supported	Supported
SII_PM_ALIGNMENT_CENTER	Centered	Supported	Supported
SII_PM_ALIGNMENT_RIGHT	Align right	Supported	Supported

(l) Barcode symbol (**BarcodeSymbol**)

Enumerated type constants used for barcode symbol are shown in the following table.

Table 4-22 Barcode Symbol (**BarcodeSymbol**)

Constant Name	Description	Type	Target	
			Mobile	POS
SII_PM_BARCODE_UPC_A	UPC-A	(a)	Supported	Supported
SII_PM_BARCODE_UPC_E	UPC-E	(a)	Supported	Supported
SII_PM_BARCODE_EAN13	EAN13	(a)	Supported	Supported
SII_PM_BARCODE_JAN13	JAN13	(a)	Supported	Supported
SII_PM_BARCODE_EAN8	EAN8	(a)	Supported	Supported
SII_PM_BARCODE_JAN8	JAN8	(a)	Supported	Supported
SII_PM_BARCODE_CODE39	CODE39	(a), (b)	Supported	Supported
SII_PM_BARCODE_CODE93	CODE93	(c)	Not supported	Supported
SII_PM_BARCODE_CODE128	CODE128	(c)	Supported	Supported
SII_PM_BARCODE_ITF	ITF	(a), (b)	Supported	Supported
SII_PM_BARCODE_CODABAR	CODABAR	(a), (b)	Supported	Supported
SII_PM_BARCODE_EAN13_ADDON	EAN13 add-on	(a)	Not supported	Supported
SII_PM_BARCODE_JAN13_ADDON	JAN13 add-on	(a)	Not supported	Supported

See `printBarcode` method or `printPageModeBarcode` method for the type.

(m) Module size (**ModuleSize**)

Enumerated type constants used for module size are shown in the following table.

Table 4-23 Module Size (ModuleSize)

Constant Name	Description	Using Method	Target	
			Mobile*1	POS
SII_PM_BARCODE_MODULE_WIDTH_2	Fine element 2 dots Module width 0.250 mm	<code>printBarcode</code> <code>printPageModeBarcode</code>	Supported	Supported
SII_PM_BARCODE_MODULE_WIDTH_3	Fine element 3 dots Module width 0.375 mm		Supported	Supported
SII_PM_BARCODE_MODULE_WIDTH_4	Fine element 4 dots Module width 0.500 mm		Supported	Supported
SII_PM_BARCODE_MODULE_WIDTH_5	Fine element 5 dots Module width 0.625 mm		Not supported	Supported
SII_PM_BARCODE_MODULE_WIDTH_6	Fine element 6 dots Module width 0.750 mm		Not supported	Supported
SII_PM_PDF417_MODULE_WIDTH_2	Nominal fine element width 2 dots	<code>printPDF417</code> <code>printPageModePDF417</code>	Supported	Supported
SII_PM_PDF417_MODULE_WIDTH_3	Nominal fine element width 3 dots		Supported	Supported
SII_PM_PDF417_MODULE_WIDTH_4	Nominal fine element width 4 dots		Supported	Supported
SII_PM_PDF417_MODULE_WIDTH_5	Nominal fine element width 5 dots		Supported	Not supported
SII_PM_PDF417_MODULE_WIDTH_6	Nominal fine element width 6 dots		Supported	Not supported
SII_PM_PDF417_MODULE_WIDTH_7	Nominal fine element width 7 dots		Supported	Not supported
SII_PM_PDF417_MODULE_WIDTH_8	Nominal fine element width 8 dots		Supported	Not supported
SII_PM_QR_MODULE_SIZE_2	2 dots	<code>printQRcode</code> <code>printPageModeQRcode</code>	Supported	Supported
SII_PM_QR_MODULE_SIZE_3	3 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_4	4 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_5	5 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_6	6 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_7	7 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_8	8 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_9	9 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_10	10 dots		Supported	Supported
SII_PM_QR_MODULE_SIZE_11	11 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_2	2 dots	<code>printDataMatrix</code> <code>printPageModeDataMatrix</code>	Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_3	3 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_4	4 dots		Supported	Supported

Constant Name	Description	Using Method	Target	
			Mobile *1	POS
SII_PM_DATAMATRIX_MODULE_SIZE_5	5 dots	printDataMatrix printPageModeDataMatrix	Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_6	6 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_7	7 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_8	8 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_9	9 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_10	10 dots		Supported	Supported
SII_PM_DATAMATRIX_MODULE_SIZE_11	11 dots		Supported	Supported

*1: Mobile does not support the dedicated method for page mode.

(n) HRI character print position (**HriPosition**)

Enumerated type constants used for HRI character print position are shown in the following table.

Table 4-24 HRI Character Print Position (HriPosition)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_HRI_NONE	Do not print	Supported	Supported
SII_PM_HRI_POSITION_ABOVE	Above barcode	Supported	Supported
SII_PM_HRI_POSITION_BELOW	Below barcode	Supported	Supported
SII_PM_HRI_POSITION_ABOVE_BELOW	Above and below barcode (both)	Supported	Supported

(o) N:W ratio (**NwRatio**)

Enumerated type constants used for N:W ratio are shown in the following table.

Table 4-25 N:W Ratio (NwRatio)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_BARCODE_WIDE_WIDTH_1	Wide width type 1	Supported	Not supported
SII_PM_BARCODE_WIDE_WIDTH_2	Wide width type 2	Supported	Not supported
SII_PM_BARCODE_WIDE_WIDTH_3	Wide width type 3	Supported	Not supported
SII_PM_BARCODE_WIDE_WIDTH_4	Wide width type 4	Supported	Not supported
SII_PM_NWRATIO_1TO2	1:2	Not supported	Supported
SII_PM_NWRATIO_1TO2_5	1:2.5	Not supported	Supported
SII_PM_NWRATIO_1TO3	1:3	Not supported	Supported

(p) Error correction level (**ErrorCorrection**)

Enumerated type constants used for error correction level are shown in the following table.

Table 4-26 Error Correction Level (ErrorCorrection)

Constant Name	Description	Using Method	Target	
			Mobile ^{*1}	POS
SII_PM_PDF417_ERROR_CORRECTION_0	Error correction level 0	printPDF417 printPageMod ePDF417	Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_1	Error correction level 1		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_2	Error correction level 2		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_3	Error correction level 3		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_4	Error correction level 4		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_5	Error correction level 5		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_6	Error correction level 6		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_7	Error correction level 7		Supported	Supported
SII_PM_PDF417_ERROR_CORRECTION_8	Error correction level 8		Supported	Supported
SII_PM_QR_ERROR_CORRECTION_L	Error correction level L	printQRcode printPageMod eQRcode	Supported	Supported
SII_PM_QR_ERROR_CORRECTION_M	Error correction level M		Supported	Supported
SII_PM_QR_ERROR_CORRECTION_H	Error correction level H		Supported	Supported
SII_PM_QR_ERROR_CORRECTION_Q	Error correction level Q		Supported	Supported

*1: Mobile does not support the dedicated method for page mode.

(q) PDF417 symbol (**Pdf417Symbol**)

Enumerated type constants used for PDF417 symbol are shown in the following table.

Table 4-27 PDF417 Symbol (Pdf417Symbol)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_PDF417_STANDARD	Standard PDF417	Supported	Supported
SII_PM_PDF417_COMPACT	Compact PDF417	Supported	Supported

(r) QR code model (**QrModel**)

Enumerated type constants used for QR code model are shown in the following table.

Table 4-28 QR Code Model (QrModel)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_QR_MODEL_1	QR code model 1	Supported	Supported
SII_PM_QR_MODEL_2	QR code model 2	Supported	Supported

(s) Data Matrix Module (**DataMatrixModule**)

Enumerated type constants used for Data Matrix module are shown in the following table.

Table 4-29 Data Matrix Module (DataMatrixModule)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_DATA_MATRIX_AUTO	Module numbers: Automatic	Supported	Supported
SII_PM_DATA_MATRIX_10_10	Module numbers: 10 × 10	Supported	Supported
SII_PM_DATA_MATRIX_12_12	Module numbers: 12 × 12	Supported	Supported
SII_PM_DATA_MATRIX_14_14	Module numbers: 14 × 14	Supported	Supported
SII_PM_DATA_MATRIX_16_16	Module numbers: 16 × 16	Supported	Supported
SII_PM_DATA_MATRIX_18_18	Module numbers: 18 × 18	Supported	Supported
SII_PM_DATA_MATRIX_20_20	Module numbers: 20 × 20	Supported	Supported
SII_PM_DATA_MATRIX_22_22	Module numbers: 22 × 22	Supported	Supported
SII_PM_DATA_MATRIX_24_24	Module numbers: 24 × 24	Supported	Supported
SII_PM_DATA_MATRIX_26_26	Module numbers: 26 × 26	Supported	Supported
SII_PM_DATA_MATRIX_32_32	Module numbers: 32 × 32	Supported	Supported
SII_PM_DATA_MATRIX_36_36	Module numbers: 36 × 36	Supported	Supported
SII_PM_DATA_MATRIX_40_40	Module numbers: 40 × 40	Supported	Supported
SII_PM_DATA_MATRIX_44_44	Module numbers: 44 × 44	Supported	Supported
SII_PM_DATA_MATRIX_48_48	Module numbers: 48 × 48	Supported	Supported
SII_PM_DATA_MATRIX_52_52	Module numbers: 52 × 52	Supported	Supported
SII_PM_DATA_MATRIX_64_64	Module numbers: 64 × 64	Supported	Supported
SII_PM_DATA_MATRIX_72_72	Module numbers: 72 × 72	Supported	Supported
SII_PM_DATA_MATRIX_80_80	Module numbers: 80 × 80	Supported	Supported
SII_PM_DATA_MATRIX_88_88	Module numbers: 88 × 88	Supported	Supported
SII_PM_DATA_MATRIX_96_96	Module numbers: 96 × 96	Supported	Supported
SII_PM_DATA_MATRIX_104_104	Module numbers: 104 × 104	Supported	Supported
SII_PM_DATA_MATRIX_120_120	Module numbers: 120 × 120	Supported	Supported
SII_PM_DATA_MATRIX_132_132	Module numbers: 132 × 132	Supported	Supported
SII_PM_DATA_MATRIX_144_144	Module numbers: 144 × 144	Supported	Supported

Constant Name	Description	Target	
		Mobile	POS
SII_PM_DATA_MATRIX_8_18	Module numbers: 8 × 18	Supported	Supported
SII_PM_DATA_MATRIX_8_32	Module numbers: 8 × 32	Supported	Supported
SII_PM_DATA_MATRIX_12_26	Module numbers: 12 × 26	Supported	Supported
SII_PM_DATA_MATRIX_12_36	Module numbers: 12 × 36	Supported	Supported
SII_PM_DATA_MATRIX_16_36	Module numbers: 16 × 36	Supported	Supported
SII_PM_DATA_MATRIX_16_48	Module numbers: 16 × 48	Supported	Supported

(t) MaxiCode Mode (**MaxiCodeMode**)

Enumerated type constants used for MaxiCode mode are shown in the following table.

Table 4-30 MaxiCode Mode (**MaxiCodeMode**)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_MAXI_CODE_2	Mode2	Supported	Supported
SII_PM_MAXI_CODE_3	Mode3	Supported	Supported
SII_PM_MAXI_CODE_4	Mode4	Supported	Supported
SII_PM_MAXI_CODE_5	Mode5	Supported	Supported

(u) Cutting method (**CuttingMethod**)

Enumerated type constants used for cutting method are shown in the following table.

Table 4-31 Cutting Method (**CuttingMethod**)

Constant Name	Description		Target	
	Paper Feed to Cut Position	Cutting Method	Mobile	POS
SII_PM_CUT_FULL	Enabled	Full cut	Not supported	Supported
SII_PM_CUT_FULL_NO_FEED	Disabled			
SII_PM_CUT_PARTIAL	Enabled	Partial cut	Not supported	Supported
SII_PM_CUT_PARTIAL_NO_FEED	Disabled			
SII_PM_CUT_NONE ^{*1}	Disabled	Supported	Not supported	Supported


*1: Supported only by `printPageMode` method.

(v) Print direction (**Direction**)

Enumerated type constants used for print direction in page mode are shown in the following table.

Table 4-32 Print Direction (Direction)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_DIRECTION_LEFT_TO_RIGHT	Starting point: Upper left (A on the figure), Print direction: Left to Right	Not supported	Supported
SII_PM_DIRECTION_BOTTOM_TO_TOP	Starting point: Left below (B on the figure), Print direction: Below to Upper	Not supported	Supported
SII_PM_DIRECTION_RIGHT_TO_LEFT	Starting point: Right below (C on the figure), Print direction: Right to Left	Not supported	Supported
SII_PM_DIRECTION_TOP_TO_BOTTOM	Starting point: Upper right (D on the figure), Print direction: Upper to Below	Not supported	Supported

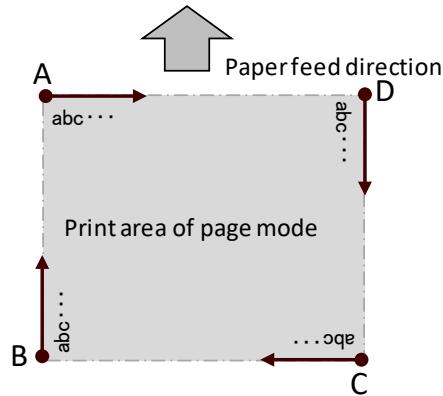

(w) Line style (**LineStyle**)

Enumerated type constants used for line style in page mode are shown in the following table.

Table 4-33 Line Style (LineStyle)

Constant Name	Description	Target	
		Mobile	POS
SII_PM_LINESTYLE_THIN	Thin solid line (2 dots)	Not supported	Supported
SII_PM_LINESTYLE_MEDIUM	Medium solid line (4 dots)	Not supported	Supported
SII_PM_LINESTYLE_THICK	Thick solid line (8 dots)	Not supported	Supported

(5) Method Details

(a) Common method to standard mode and page mode

The following methods are valid in standard mode and page mode. Standard mode is set immediately after `connect` method is executed.

init	Instance						
Target	Mobile printer / POS printer						
Syntax	<code>- (id) init;</code>						
Description	This method initializes the instance of <code>SIIPrinterManager</code> class.						
Return	When succeeded, the initialized instance of <code>SIIPrinterManager</code> class is returned. When failed, nil is returned.						
Using Example	<code>SIIPrinterManager *printerManager =[[SIIPrinterManager alloc] init];</code>						
connect	Start communicating with a printer (Bluetooth)						
Target	Mobile printer / POS printer						
Syntax	<code>- (void) connect: (NSInteger) printerModel address: (NSString) address portType: (NSInteger) portType;</code>						
Parameter	<table> <tr> <td><code>printerModel</code></td><td>Printer model constant for Bluetooth connection</td></tr> <tr> <td><code>address</code></td><td>Bluetooth device (Bluetooth accessory) Example: "DPU-S245"</td></tr> <tr> <td><code>portType</code></td><td>Port type Example: <code>SII_PM_PRINTER_PORT_TYPE_BLUETOOTH</code></td></tr> </table>	<code>printerModel</code>	Printer model constant for Bluetooth connection	<code>address</code>	Bluetooth device (Bluetooth accessory) Example: "DPU-S245"	<code>portType</code>	Port type Example: <code>SII_PM_PRINTER_PORT_TYPE_BLUETOOTH</code>
<code>printerModel</code>	Printer model constant for Bluetooth connection						
<code>address</code>	Bluetooth device (Bluetooth accessory) Example: "DPU-S245"						
<code>portType</code>	Port type Example: <code>SII_PM_PRINTER_PORT_TYPE_BLUETOOTH</code>						
Description	<p>This method starts communication between iOS device and paired printer through Bluetooth connection. Call this method before using other methods of this class.</p> <p>This method connects to the paired Bluetooth device (Bluetooth accessory) specified by <code>address</code> parameter.</p> <p>See Table 4-5 Printer Model Constant for available setting in <code>printerModel</code> parameter.</p> <p>For <code>portType</code> parameter, specify <code>SII_PM_PRINTER_PORT_TYPE_BLUETOOTH</code>.</p> <p>In order to operate this library properly, printer settings may be needed to change at the connection in this method.</p> <p>The Library disconnects Bluetooth connection with printer by executing <code>disconnect</code> method.</p>						
Error	<code>SIIPrinterException</code> is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.						
Note	A concurrent connection from multiple apps to one printer is not supported.						

connect

Start communicating with a printer (TCP/IP)

Target	POS printer										
Syntax	<pre>- (void) connect: (NSInteger)printerModel address: (NSString *)address portType: (NSInteger)portType;</pre>										
Parameter	<table><tr><td>printerModel</td><td>Printer model constant for Ethernet connection</td></tr><tr><td>address</td><td>IP address</td></tr><tr><td></td><td>Example: "192.168.0.1"</td></tr><tr><td>portType</td><td>Port type</td></tr><tr><td></td><td>Example: SII_PM_PRINTER_PORT_TYPE_TCP</td></tr></table>	printerModel	Printer model constant for Ethernet connection	address	IP address		Example: "192.168.0.1"	portType	Port type		Example: SII_PM_PRINTER_PORT_TYPE_TCP
printerModel	Printer model constant for Ethernet connection										
address	IP address										
	Example: "192.168.0.1"										
portType	Port type										
	Example: SII_PM_PRINTER_PORT_TYPE_TCP										
Description	<p>This method is valid only for POS printer. This method starts communication between iOS device and printer connected to the same network through TCP/IP connection. Call this method before using other methods of this class.</p> <p>This method connects to the IP address specified by address parameter. TCP port number 9100 is used for communication. Also, printer default settings are executed based on printerModel parameter which is specified at the connection. See Table 4-5 Printer Model Constant for available printer model constant in printerModel parameter.</p> <p>For the portType parameter, specify SII_PM_PRINTER_PORT_TYPE_TCP.</p> <p>In order to operate a printer properly, printer settings may be needed to change at the connection in this method.</p> <p><Introduction to creating/discard a socket during connection with TCP/IP in the Library></p> <p>After connect method, the library retains the created socket until disconnect method executed. And connecting to the same printer from other applications is not possible until disconnect method executed.</p> <p>Based on the completion time of data transmission to the printer, the socket is once discarded after elapsing the socket keeping time set by socketKeepingTime. Then the new socket is created immediately and used for the next connection.</p> <p>If the printer is receiving a connection request from another host on the same network at the time of discarding the socket, the reconnection may fail because the printer establishes communication with the host.</p>										
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>										
Note	A concurrent connection from multiple apps to one printer is not supported.										

disconnect

Disconnect a printer

Target	Mobile printer / POS printer
Syntax	<pre>- (void) disconnect;</pre>
Description	This method disconnects communication with a printer.
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

Note	<p>Execute this method after transmitting the data.</p> <p>If executing this method before data transmission is completed, the following problems may be occurred:</p> <ul style="list-style-type: none">• A part of the data may be deleted.• In Bluetooth connection, when <code>connect</code> method is executed soon after executing this method, the connection between iOS device and the printer becomes abnormal and may not transmit/receive the data. <p>To verify data transmission completion, it is recommended to obtain execution response by <code>SII_PM_PRINTER_RESPONSE_REQUEST</code> of <code>getPrinterResponse</code> method before executing this method.</p> <p>When this method is executed without executing <code>getPrinterResponse</code> method in your program, evaluate your program to confirm no problems arise.</p>
------	---

openDrawer		Open cash drawer
Target	POS printer	
Syntax		<pre>- (void) openDrawer: (DrawerNum) drawerNum onOffTime: (PulseWidth) onOffTime;</pre>
Parameter	drawerNum onOffTime	Drawer number pulse width
Description	<p>This method is valid only for POS printer. This method opens the specified cash drawer.</p> <p>See Table 4-11 Drawer Number (DrawerNum) for available setting in drawerNum parameter.</p> <p>See Table 4-12 Activation Pulse Width (PulseWidth) for available setting in onOffTime parameter.</p>	
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>	

buzzer	Sound buzzer				
Target	POS printer				
Syntax	<pre>- (void) buzzer: (NSInteger)onTime offTime: (NSInteger)offTime;</pre>				
Parameter	<table><tr><td>onTime</td><td>Buzzer On time (millisecond)</td></tr><tr><td>offTime</td><td>Buzzer Off time (millisecond)</td></tr></table>	onTime	Buzzer On time (millisecond)	offTime	Buzzer Off time (millisecond)
onTime	Buzzer On time (millisecond)				
offTime	Buzzer Off time (millisecond)				
Description	<p>This method is valid only for POS printer. This method sounds the buzzer.</p> <p>The valid range of onTime and offTime parameter is from 0 to 510.</p>				
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>				

externalBuzzer	Sound external buzzer
Target	Mobile printer / POS printer
Syntax	<pre>- (void) externalBuzzer:(BuzzerPattern)buzzerPattern buzzerCount:(NSInteger)buzzerCount;</pre>
Description	This method is not supported. SIIPrinterException is thrown when this method is executed.

getStatus Obtain printer status

Target	Mobile printer / POS printer
Syntax	- (void) getStatus : (NSInteger[])buf;
Parameter	buf Status obtained from a printer
Description	This method obtains printer status. Status obtained from a printer is stored to an NSInteger array. Contents of status vary between Mobile printer and POS printer. When specified printerModel parameter while executing connect method is SII_PM_PRINTER_MODEL_DPU_S245 or SII_PM_PRINTER_MODEL_DPU_S400 , the contents of Mobile printer status. When the printerModel parameter is SII_PM_PRINTER_MODEL_RP_D10 or SII_PM_PRINTER_MODEL_RP_E10 , the contents of POS printer status.

The Mobile printer status is shown in the following table.
When the connection failed, the Mobile printer status is shown in 0x00000000.

Table 4-34 Printer Status (Mobile Printer)			
Bit	Function	Value	
		0	1
0	Out-of-paper error	OK	Error
1	Head up error	OK	Error
2	Vp voltage malfunction	OK	Error
3	Thermal head temperature error	OK	Error
4	Function Setting error	OK	Error
5	Battery voltage state	See table below	
6			
7	Reserved	-	Fixed
8 to 31	Reserved	Fixed	-

Bit 6	Bit 5	Battery Voltage State
0	0	8.0 V or higher
0	1	7.5 or higher to lower than 8.0 V
1	0	7.0 or higher to lower than 7.5 V
1	1	Lower than 7.0 V

The POS printer status is shown in the following table.
When the connection failed, the POS printer status is shown in 0x80000000.

Table 4-35 Printer Status (POS Printer)

Bit	Function	Value	
		0	1
0	VP voltage error	OK	Error
1	Hardware error	OK	Error
2	Head temperature error	OK	Error
3	Autocutter error	OK	Error
4	Out-of-paper error	OK	Error
5	Paper-near-end sensor error ^{*1}	OK	Error
6	Paper jam error while detecting mark ^{*1}	OK	Error
7	Cover open error	OK	Error
8	FEED Switch status	OFF	ON
9	Reserved	Fixed	-
10	Paper feed status	Stop	Operating
11	Return-waiting status	No	Yes
12	Reserved	Fixed	-
13	Reserved	-	Fixed
14	Reserved	-	Fixed
15	Drawer switch input status	Low	High
16	FLASH memory rewriting	No	Yes
17	Peripheral device selection	Printer	Other
18 to 31	Reserved	-	Fixed

*1: Supported only in RP-E10. In RP-D10, it is always OK (value: 0).

Error **SIIPrinterException** is thrown when an error occurs while this method is to be called.
See "**4.3.3 SIIPrinterException Class**" for details on the error.

abort		Abort the waiting state of a printer
Target	Mobile printer / POS printer	
Syntax	<code>- (void) abort;</code>	
Description	When sending of image file by sendDataFile method is aborted, a printer does not accept other processes until specified image file is received completely. (Method or sent data are misinterpreted and recognized as part of the image file.) To solve this situation, use this method to abort the waiting state of a printer. Note that when executing this method, a part of unprocessed image file may be printed.	
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.	

registerLogo

Register logo (image) to a printer

Target	Mobile printer / POS printer
Syntax	<pre>(a) - (void) registerLogo:(NSString *)fileName logoId:(NSString *)logoId dithering:(Dithering)dithering; (b) - (void) registerLogo:(NSString *)fileName logoId:(NSString *)logoId;</pre>
Parameter	fileName File path of image file to register as logo logoId Logo ID to register dithering Dithering
Description	<p>This method registers image file specified by fileName parameter to a printer as a logo.</p> <p>The method of syntax (a), dithering can be specified. The method of syntax (b), dithering is fixed to be disabled.</p> <p>File extension for image file supported by fileName parameter is .bmp, .jpg, .jpeg, or .png.</p> <p>The valid range of logoId parameter varies depends on the target printer.</p> <ul style="list-style-type: none"> For Mobile printer, the valid range is a character string indicating the value from 0 to 127. For POS printer, specify by 2 characters. The valid characters are ASCII character code from 20h (space) to 7Eh (tilde) such as alphanumeric ('0' to '9', 'A' to 'Z', 'a' to 'z'). <p>See Table 4-13 Dithering (Dithering) for available setting in dithering parameter.</p>
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.

unregisterLogo

Delete specified logo (image) on a printer

Target	Mobile printer / POS printer
Syntax	- (void) unregisterLogo:(NSString *)logoId;
Parameter	logoId Logo ID to delete
Description	<p>This method deletes the logo (image) registered by registerLogo method (for Mobile printer). Specify registered logo ID in logoId parameter. The valid range of logoId parameter varies depends on the target printer.</p> <p>For Mobile printer, the valid range is a character string indicating the value from 0 to 127.</p> <p>For POS printer, specify by 2 characters. The valid characters are ASCII character code from 20h (blank) to 7Eh (tilde) such as alphanumeric ('0' to '9', 'A' to 'Z', 'a' to 'z').</p>
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.

registerStyleSheet

Register style sheet to a printer

Target	POS printer
Syntax	<pre>- (void) registerStyleSheet: (NSString *) fileName cssId: (NSInteger) cssId;</pre>
Parameter	fileName CSS file path to register as style sheet cssId Style sheet number to register
Description	<p>This method is valid only for POS printer. This method registers CSS file specified by fileName parameter to a printer. Maximum number of registerable style sheet is 4 sheets.</p> <p>Style sheet supported by fileName parameter is that style sheet language is written in CSS (cascading style sheets), and that file extension is .css.</p> <p>Maximum number of style registerable to 1 CSS file is 64.</p> <p>Also, the valid range of cssId parameter is from 1 to 4.</p> <p>See "6.5.13 Tag Processing Mode" in "RP-D10 SERIES THERMAL PRINTER TECHNICAL REFERENCE" or "RP-E10 SERIES THERMAL PRINTER TECHNICAL REFERENCE" for more details about style sheet.</p>
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.

unregisterStyleSheet

Delete specified style sheet on a printer

Target	POS printer
Syntax	<pre>- (void) unregisterStyleSheet: (NSInteger) cssId;</pre>
Parameter	cssId Style sheet number to delete
Description	<p>This method is valid only for POS printer. This method deletes the style sheet registered by registerStyleSheet method.</p> <p>Specify the registered style sheet number for cssId parameter.</p> <p>The valid range of cssId parameter is from 1 to 4.</p>
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.

resetPrinter

Printer hardware reset

Target	POS printer
Syntax	<pre>- (void) resetPrinter;</pre>
Description	<p>This method is valid only for POS printer.</p> <p>For TCP/IP connection: This method resets a connected printer by using the SII original command (reset command) to TCP port number 26100.</p>

For Bluetooth connection:

This method resets the printer hardware by using the printer command "Printer Reset". When using this method, set iOS Auto Connection in Function Setting of the printer to "Enabled". When iOS Auto Connection is set to "Disabled", this method fail to reconnect after reset and **SIIPrinterException** is thrown.

This method needs about 10 seconds until complete to reconnect after reset executing. When calling this method, set **receiveTimeout** property to enough time to complete this method.

After executing this method, connection to a printer is maintained.

Error **SIIPrinterException** is thrown when an error occurs while this method is to be called.
See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

getPrinterResponse		Obtaining various responses from a printer		
Target	Mobile printer / POS printer			
Syntax	<pre>- (void) getPrinterResponse:(NSInteger)responseId param:(NSObject *)param response:(void *)response;</pre>			
Parameter	responseId param response	Response type constant Response code of execution response request Buffer that stores obtained response data (Buffer type varies depending on a response type constant.)		
Description	<p>This method stores the response data specified by responseId parameter to the object specified by response parameter. See Table 4-7 Response Type Constant for available setting for responseId parameter. Contents of obtainable response from a printer vary between Mobile printer and POS printer.</p> <p>When specified printerModel parameter while executing connect method is SII_PM_PRINTER_MODEL_DPU_S245 or SII_PM_PRINTER_MODEL_DPU_S445, see the contents of obtained response for Mobile printer. When the printerModel parameter is SII_PM_PRINTER_MODEL_RP_D10 or SII_PM_PRINTER_MODEL_RP_E10, see the contents of obtained response for POS printer.</p>			
Contents of obtained response for Mobile printer are shown in the following table.				
Table 4-36 Contents of Obtained Response (Mobile Printer)				
Constant Name	Description			
SII_PM_PRINTER_RESPONSE_REQUEST	<p>Obtains "Execution response request". Specify 0 to 15 (00h to 0Fh) of NSData to param parameter. Specify NSInteger array with the length of 1 to response parameter. When responses are obtained successfully, 80 to 95 (50h to 5Fh) is stored to the response parameter.</p>			
SII_PM_PRINTER_RESPONSE_USER_AREA	<p>Obtains "Send remaining capacity of user area". Specify nil to param parameter. Specify NSInteger array with the length of 1 to response parameter. When responses are obtained successfully, remaining user area is stored to the response parameter in byte value.</p>			

Constant Name	Description
SII_PM_PRINTER_RESPONSE_BATTERY_STATUS	<p>Obtains "Battery voltage state".</p> <p>Specify nil to <code>param</code> parameter.</p> <p>Specify NSInteger array with the length of 1 to <code>response</code> parameter.</p> <p>When responses are obtained successfully, the battery status value is stored to the <code>response</code> parameter.</p> <p>Meanings of battery status values are as follows.</p>

Battery Status Value	Battery Voltage State
0	8.0 V or higher
1	7.5 or higher to lower than 8.0 V
2	7.0 or higher to lower than 7.5 V
3	Lower than 7.0 V

Contents of obtained response for POS printer are shown in the following table.

Table 4-37 Contents of Obtained Response (POS Printer)

Constant Name	Description
SII_PM_PRINTER_RESPONSE_REQUEST	<p>Obtains "Execution response request".</p> <p>Specify 0 to 15 (00h to 0Fh) of NSData to <code>param</code> parameter.</p> <p>Specify NSInteger array with the length of 1 to <code>response</code> parameter.</p> <p>When responses are obtained successfully, 128 to 143 (80h to 8Fh) is stored to <code>response</code> parameter.</p>
SII_PM_PRINTER_RESPONSE_USER_AREA	<p>Obtains "Send remaining capacity of user area".</p> <p>Specify nil to <code>param</code> parameter.</p> <p>Specify NSInteger array with the length of 1 to <code>response</code> parameter.</p> <p>When responses are obtained successfully, remaining user area is stored to <code>response</code> in byte value.</p>
SII_PM_PRINTER_RESPONSE_ARRANGE_USER_AREA	<p>Obtains "Send remaining capacity of user area after defragment".</p> <p>Specify nil to <code>param</code> parameter.</p> <p>Specify NSInteger array with the length of 1 to <code>response</code> parameter.</p> <p>When responses are obtained successfully, remaining memory after user area defragment is stored to <code>response</code> parameter in byte value.</p>
SII_PM_PRINTER_RESPONSE_NV_GRAPHICS	<p>Obtains "Send NV graphics memory capacity".</p> <p>Specify nil to <code>param</code> parameter.</p> <p>Specify NSInteger array with the length of 1 to <code>response</code> parameter.</p> <p>When responses are obtained successfully, NV graphics memory capacity is stored to <code>response</code> in byte value.</p>

Constant Name	Description
SII_PM_PRINTER_RESPONSE_KEY_CODE	Obtains "Send key code list of defined NV graphics". Specify nil to param parameter. Specify NSMutableArray array to response parameter. When responses are obtained successfully, the key code of NV graphics is stored to response parameter in string array.
SII_PM_PRINTER_RESPONSE_FIRMWARE_VERSION	Obtains "Firmware version". Specify nil to param parameter. Specify NSMutableArray array to response parameter. When responses are obtained successfully, the firmware version is stored to response parameter in string array.

Error **SIIPrinterException** is thrown when an error occurs while this method is to be called.
See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

startDiscoveryPrinter

Start printer search (Bluetooth)

Target Mobile printer / POS printer

Syntax - (void)**startDiscoveryPrinter**: (NSPredicate *)predicate
completion: (EABluetoothAccessoryPickerCompletion) completion;

Parameter **predicate** Specify nil.
completion Event completion of
EABluetoothAccessoryPickerCompletion

Description This method searches Bluetooth device (Bluetooth accessory). This method calls showBluetoothAccessoryPickerWithNameFilter of EAAccessoryManager internally. When executing this method, paring with Bluetooth device is enable in the displayed window.

Specify ^ (NSError *error) to **completion** parameter in order to receive event completion of EABluetoothAccessoryPickerCompletion.

(cf.) Statement of EABluetoothAccessoryPickerCompletion
typedef void(^EABluetoothAccessoryPickerCompletion)
(NSError *error);

Error **SIIPrinterException** is thrown when an error occurs while this method is to be called.
See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

startDiscoveryPrinter

Start printer search (TCP/IP)

Target POS printer

Syntax - (void)**startDiscoveryPrinter**: (NSInteger)retryCount
timeout: (NSInteger)timeout
completion: (SIIDiscoveryPrinterCompletion) completion;

Parameter **retryCount** Retry count (times)
timeout Searching timeout period (millisecond: ms)
completion Event completion of printer search

Description	<p>This method is valid only for POS printer. This method is available only when specified <code>portType</code> parameter is <code>SII_PM_PRINTER_PORT_TYPE_TCP</code> while executing <code>connect</code> method. This method sends local broad cast packet and searches for SII printer connecting to the same network. Completion or cancellation of searching is notified to a block specified in <code>completion</code> parameter as an event.</p> <p>This method sends the local broad cast packet the number of times set in <code>retryCount</code> parameter. The valid range of <code>retryCount</code> parameter is 1 to 5. When the value is specified less than 1, the number is set to 1. When the value is specified more than 5, the number is set to 5.</p> <p>This method waits for response from the printer until the search timeout period set by <code>timeout</code> parameter. The valid range of <code>timeout</code> parameter is 3000 to 60000. When the value is specified less than 3000, the period is set to 3000. When the value is specified more than 60000, the period is set to 60000. The searching printer information can be obtained by <code>getFoundPrinter</code> method.</p> <p>The definition of <code>SIIDiscoveryPrinterCompletion</code> is as follows.</p> <pre>typedef void(^SIIDiscoveryPrinterCompletion) (NSArray *printerList);</pre> <p>In order to use this method, LAN interface F/W version needs to be 1.13.01 or later.</p>
Error	<p><code>SIIPrinterException</code> is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

cancelDiscoveryPrinter

Cancel printer search

Target	POS printer
Syntax	<code>- (void)cancelDiscoveryPrinter;</code>
Description	This method is valid only for POS printer. This method is available only when specified <code>portType</code> parameter is <code>SII_PM_PRINTER_PORT_TYPE_TCP</code> while executing <code>connect</code> method. This method cancels executing <code>startDiscoveryPrinter</code> method. Cancellation of searching is notified to a block specified in <code>completion</code> parameter as an event.

getFoundPrinter

Obtain searched printer information

Target	POS printer
Syntax	<code>- (NSArray *)getFoundPrinter;</code>
Parameter	This method is valid only for POS printer. This method is available only when specified <code>portType</code> parameter is <code>SII_PM_PRINTER_PORT_TYPE_TCP</code> while executing <code>connect</code> method. This method returns the printer information searched by printer search as <code>NSArray</code> type. See " 4.3.2 SIIPrinterInfo Class " for the details of printer information.
Return value	Printer information of <code>NSArray</code> type

getVersion

Get SDK version

Target	Mobile printer / POS printer
Syntax	- (NSString *) getVersion ;
Description	Gets the SDK version as a character string. This property can be executed regardless of whether isConnect is YES or NO.
Return value	SDK version character string (Example: When the SDK version is Ver.1.0.0, the return value is "1.0.0")

controlTransaction

Start/End batch processing

Target	Mobile printer / POS printer
Syntax	- (void) controlTransaction:(TransactionFunction) control ;
Parameter	control Batch processing selection
Description	The procedure of batch processing is as follows: See Table 4-14 Batch Processing Selection (TransactionFunction) for the details about configurable values. (1) Start batch processing. Specify SII_PM_TRANSACTION_START . (2) Execute the method. In the case of the batch processing target method, buffering of transmission data is started. The transmission data of the batch processing target method executed during buffering is buffered in the transmission buffer without being sent to the printer. The maximum size of transmission data to be buffered is system dependent. If the buffered transmission data exceeds the maximum size, the batch processing target method at the time of exceeding becomes an error. If an error occurs, the transmission data up to the error is retained. As for the retained transmission data, finish the batch processing in step (3). In the case of a method other than the batch processing target method, transmission data is immediately executed without being buffered. (3) Finish batch processing. When SII_PM_TRANSACTION_PRINT is specified, the buffered transmission data is sent to the printer. The buffered transmission data is retained even after sent to the printer. The retained transmission data is discarded by any of the following: •Specify SII_PM_TRANSACTION_CLEAR •Specify SII_PM_TRANSACTION_START •Execute disconnect method

The batch processing target methods are as follows:

- sendText**
- sendTextEx**
- printBarcode**
- printPDF417**
- printQRcode**
- printDataMatrix**
- printMaxiCode**
- cutPaper**^{*1}
- openDrawer**^{*1}
- buzzer**^{*1}
- sendBinary**

```
·sendDataFile  
·printLogo*2  
·enterPageMode*1  
·exitPageMode*1  
·setPageModeArea*1  
·setPageModeDirection*1  
·setPageModeLineSpacing*1  
·printPageMode*1  
·printPageModeText*1  
·printPageModeTextEx*1  
·printPageModeBarcode*1  
·printPageModePDF417*1  
·printPageModeQRcode*1  
·printPageModeDataMatrix*1  
·printPageModeMaxiCode*1  
·sendPageModeBinary*1  
·printPageModeImageFile*1  
·printPageModeRectangle*1  
·printPageModeLine*1  
·printPageModeLogo*1*2
```

*1: This method is not supported by Mobile printer.

*2: The method under batch processing does not notify the error even when the registered logo does not exist.

Error

SIIPrinterException is thrown when an error occurs while this method is to be called.

See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

(b) Dedicated method for standard mode

The following methods are valid in standard mode. **SIIPrinterException** is thrown when the dedicated method for standard mode are executed in page mode.

sendText

Send text data

Target	Mobile printer / POS printer
Syntax	<code>- (void) sendText: (NSString *)text;</code>
Parameter	text Text data sent to a printer
Description	<p>This method sends the text data specified by text parameter to a printer. Data size that can be specified at 1 time is 16K bytes (16384 bytes).</p> <p>This method encodes the specified text data to printable text data based on internationalCharacter property and codePage property, and then sends it to the printer.</p> <p>In this method, the line spacing code is not added to the end of text data.</p>
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

sendTextEx

Send format specified text data

Target	Mobile printer
Syntax	<code>- (void) sendTextEx: (NSString *)text bold: (CharacterBold)bold underline: (CharacterUnderline)underline font: (CharacterFont)font scale: (CharacterScale)scale;</code>
Parameter	text Text data to send to a printer bold Bold print underline Underline font Character font scale Character scale
Description	<p>This method is valid only for Mobile printer. This method encodes the specified text data to printable text data based on internationalCharacter property and codePage property, and then sends it to the printer. Data size that can be specified at one time is 16K bytes (16384 bytes).</p> <p>See Table 4-15 Bold Print (CharacterBold) for available setting in bold parameter.</p> <p>See Table 4-16 Underline (CharacterUnderline) for available setting in underline parameter.</p> <p>See Table 4-19 Character Font (CharacterFont) for available setting in font parameter.</p> <p>See Table 4-20 Character Scale (CharacterScale) for available setting in scale parameter.</p> <p>In this method, no line feed code is added at the end of text data.</p>
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

Target	POS printer																
Syntax	<pre>(a) - (void) sendTextEx: (NSString *)text bold:(CharacterBold)bold underline:(CharacterUnderline)underline reverse:(CharacterReverse)reverse font:(CharacterFont)font scale:(CharacterScale)scale alignment:(PrintAlignment)alignment; (b) - (void) sendTextEx: (NSString *)text bold:(CharacterBold)bold underline:(CharacterUnderline)underline reverse:(CharacterReverse)reverse inversion:(CharacterInversion)inversion font:(CharacterFont)font scale:(CharacterScale)scale alignment:(PrintAlignment)alignment;</pre>																
Parameter	<table> <tr> <td>text</td><td>Text data to send to a printer</td></tr> <tr> <td>bold</td><td>Bold print</td></tr> <tr> <td>underline</td><td>Underline</td></tr> <tr> <td>reverse</td><td>Reverse print</td></tr> <tr> <td>inversion</td><td>Inversion print</td></tr> <tr> <td>font</td><td>Character font</td></tr> <tr> <td>scale</td><td>Character scale</td></tr> <tr> <td>alignment</td><td>Alignment</td></tr> </table>	text	Text data to send to a printer	bold	Bold print	underline	Underline	reverse	Reverse print	inversion	Inversion print	font	Character font	scale	Character scale	alignment	Alignment
text	Text data to send to a printer																
bold	Bold print																
underline	Underline																
reverse	Reverse print																
inversion	Inversion print																
font	Character font																
scale	Character scale																
alignment	Alignment																
Description	<p>This method is valid only for POS printer. This method encodes the specified text data to printable text data based on internationalCharacter property and codePage property, and then sends it to the printer. Data size that can be specified at one time is 16K bytes (16384 bytes).</p> <p>See Table 4-15 Bold Print (CharacterBold) for available setting in bold parameter.</p> <p>See Table 4-16 Underline (CharacterUnderline) for available setting in underline parameter.</p> <p>See Table 4-17 Reverse Print (CharacterReverse) for available setting in reverse parameter.</p> <p>See Table 4-18 Character Inversion (CharacterInversion) for available setting in inversion parameter.</p> <p>See Table 4-19 Character Font (CharacterFont) for available setting in font parameter.</p> <p>See Table 4-20 Character Scale (CharacterScale) for available setting in scale parameter.</p> <p>See Table 4-21 Alignment (PrintAlignment) for available setting in alignment parameter.</p> <p>In this method, no line feed code is added at the end of text data.</p>																
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>																

Target Mobile printer / POS printer

Syntax

```
(a) - (void) printBarcode:(BarcodeSymbol)barcodeSymbol
    text:(NSString *)text
    moduleSize:(ModuleSize)moduleSize
    moduleHeight:(NSInteger)moduleHeight
    hriPosition:(HriPosition)hriPosition
    hriFont:(CharacterFont)hriFont
    alignment:(PrintAlignment)alignment;

(b) - (void) printBarcode:(BarcodeSymbol)barcodeSymbol
    text:(NSString *)text
    moduleSize:(ModuleSize)moduleSize
    moduleHeight:(NSInteger)moduleHeight
    hriPosition:(HriPosition)hriPosition
    hriFont:(CharacterFont)hriFont
    alignment:(PrintAlignment)alignment
    nwRatio:(NwRatio)nwRatio;

(c) - (void) printBarcode:(BarcodeSymbol)barcodeSymbol
    data:(NSData*)data
    moduleSize:(ModuleSize)moduleSize
    moduleHeight:(NSInteger)moduleHeight
    hriPosition:(HriPosition)hriPosition
    hriFont:(CharacterFont)hriFont
    alignment:(PrintAlignment)alignment;

(d) - (void) printBarcode:(BarcodeSymbol)barcodeSymbol
    text:(NSString *)text
    moduleSize:(ModuleSize)moduleSize
    alignment:(PrintAlignment)alignment;
```

Parameter	barcodeSymbol	Barcode symbol
	text (data)	Text data to send to a printer
	moduleSize	Barcode width
	moduleHeight	Barcode height (dot)
	hriPosition	HRI character print position
	hriFont	HRI character font
	alignment	Alignment
	nwRatio	N:W ratio

Description This method executes barcode print.

For format (a), **nwRatio** parameter is fixed to wide width type 3 for Mobile printers and 1:2.5 for POS printers.
The format (d) is not supported.

See Table 4-22 Barcode Symbol (BarcodeSymbol) for available setting in **barcodeSymbol** parameter.

The available input conditions for barcode in **text (data)** parameter are as follows.
See Table 4-38 for Mobile printers and Table 4-39 for POS printers.

Table 4-38 Barcode Input Conditions for Mobile Printer

Barcode	Number of Data	Inputtable Data Character String (Data)	Remarks
UPC-A	11 characters	'0' to '9'	
UPC-E	11 characters	'0' to '9'	
EAN13 JAN13	12 characters	'0' to '9'	
EAN8 JAN8	7 characters	'0' to '9'	
CODE39	1 to 254 characters	'0' to '9' 'A' to 'Z' '\$', '%', '+', '!', '.', '/'	Start code and stop code ('*') are automatically added.
CODE128	2 to 255 characters	(0x00 to 0x66)	Input data with 0x67 or more at the end.
ITF	2 to 254 characters (However, an even number)	'0' to '9'	
CODABAR	1 to 254 characters	'0' to '9' '\$', '+', '!', '.', '/', '!	It is needed to specify one of 'A' to 'D' at the beginning and end.

Table 4-39 Barcode Input Conditions for POS Printer

Barcode	Number of Data	Inputtable Data Character String (Data)	Remarks
UPC-A	11 to 12 characters	'0' to '9'	
UPC-E	11 to 12 characters	'0' to '9'	
EAN13 JAN13	12 to 13 characters	'0' to '9'	
EAN8 JAN8	7 to 8 characters	'0' to '9'	
CODE39	1 to 150 characters	'0' to '9' 'A' to 'Z' '\$', '%', '+', '!', '.', '/'	Start code and stop code ('*') are automatically added.
CODE93	1 to 150 bytes	(0x00 to 0x2E)	Input data with 0x2F or more at the end.
CODE128	2 to 150 bytes	(0x00 to 0x66)	When inputting the start code (0x67 to 0x69) of the CODE128 code set. Input data with 0x67 or more at the end.
		(0x00 to 0x7F)	When starting with a CODE128 special code start code ("{A", "{B", "{C").
ITF	2 to 150 characters (However, an even number)	'0' to '9'	

Barcode	Number of Data	Inputtable Data Character String (Data)	Remarks
CODABAR	1 to 150 characters	'0' to '9' '\$', '+', '!', ',', '/', '!'	It is needed to specify one of 'A' to 'D' at the beginning and end.
EAN13 add-on JAN13 add-on	Add-on 2: 14 to 15 characters Add-on 5: 17 to 18 characters	'0' to '9'	

See Table 4-23 Module Size (ModuleSize) for available setting in `moduleSize` parameter.

The valid range of `moduleHeight` parameter is from 1 to 255.

See Table 4-24 HRI Character Print Position (HriPosition) for available setting in `hriPosition` parameter.

See Table 4-19 Character Font (CharacterFont) for available setting in `hriFont` parameter.

See Table 4-21 Alignment (PrintAlignment) for available setting in `alignment` parameter.

See Table 4-25 N:W Ratio (NwRatio) for available setting in `nwRatio` parameter. Depending on the relationship between `nwRatio` parameter and `moduleSize` parameter, the wide element width is set in the following tables. See Table 4-40 N:W Ratio for Mobile Printer for Mobile printer, and Table 4-41 N:W Ratio for POS Printer for POS printer.

Table 4-40 N:W Ratio for Mobile Printer

moduleSize	nwRatio			
	SII_PM_BARCODE_WIDE_WIDTH_1	SII_PM_BARCODE_WIDE_WIDTH_2	SII_PM_BARCODE_WIDE_WIDTH_3	SII_PM_BARCODE_WIDE_WIDTH_4
SII_PM_BARCODE_MODULE_WIDTH_2	0.625 mm (5 dots)	0.750 mm (6 dots)	0.750 mm (6 dots)	0.750 mm (6 dots)
SII_PM_BARCODE_MODULE_WIDTH_3	0.875 mm (7 dots)	1.000 mm (8 dots)	1.125 mm (9 dots)	1.125 mm (9 dots)
SII_PM_BARCODE_MODULE_WIDTH_4	1.125 mm (9 dots)	1.250 mm (10 dots)	1.375 mm (11 dots)	1.500 mm (12 dots)

Table 4-41 N:W Ratio for POS Printer

moduleSize	nwRatio		
	SII_PM_NWRATIO_1TO2	SII_PM_NWRATIO_1TO2_5	SII_PM_NWRATIO_1TO3
SII_PM_BARCODE_MODULE_WIDTH_2	0.500 mm (4 dots)	0.625 mm (5 dots)	0.750 mm (6 dots)
SII_PM_BARCODE_MODULE_WIDTH_3	0.750 mm (6 dots)	1.000 mm (8 dots)	1.125 mm (9 dots)
SII_PM_BARCODE_MODULE_WIDTH_4	1.000 mm (8 dots)	1.250 mm (10 dots)	1.500 mm (12 dots)

moduleSize	nwRatio		
	SII_PM_NWRATIO_1TO2	SII_PM_NWRATIO_1TO2_5	SII_PM_NWRATIO_1TO3
SII_PM_BARCODE_MODULE_WIDTH_5	1.250 mm (10 dots)	1.625 mm (13 dots)	1.875 mm (15 dots)
SII_PM_BARCODE_MODULE_WIDTH_6	1.500 mm (12 dots)	1.875 mm (15 dots)	2.250 mm (18 dots)

Error **SIIPrinterException** is thrown when an error occurs while this method is to be called.
See "4.3.3 SIIPrinterException Class" for details on the error.

Reference See "Appendix B Barcode Size List" for details of the barcode size.

printPDF417

Print PDF417

Target Mobile printer / POS printer

Syntax (a) - (void) **printPDF417:**(NSString *)text
 errorCorrection:(ErrorCorrection)errorCorrection
 row:(NSInteger)row
 column:(NSInteger)column
 moduleSize:(ModuleSize)moduleSize
 moduleHeight:(NSInteger)moduleHeight
 alignment:(PrintAlignment)alignment
 pdf417Symbol:(Pdf417Symbol)pdf417Symbol;

 (b) - (void) **printPDF417:**(NSString *)text
 errorCorrection:(ErrorCorrection)errorCorrection
 row:(NSInteger)row
 column:(NSInteger)column
 moduleSize:(ModuleSize)moduleSize
 moduleHeight:(NSInteger)moduleHeight
 alignment:(PrintAlignment)alignment;

Parameter **text** Barcode data to send a printer
errorCorrection Error correction level
row The number of row
column The number of columns in data area
moduleSize Nominal Fine Element Width
moduleHeight Module height (dot)
alignment Alignment
pdf417Symbol Symbol of PDF417

Description This method prints PDF417. **pdf417Symbol** parameter for syntax (b) is fixed to standard PDF417.

See Table 4-26 Error Correction Level (ErrorCorrection) for available setting in **errorCorrection** parameter.

The valid range of **row** parameter is from 0, 3 to 90. When 0 is specified, the number of row is automatically set.

The valid range of **column** parameter is from 0 to 30. When 0 is specified, the number of row in the data area is automatically set.

See Table 4-23 Module Size (ModuleSize) for available setting in **moduleSize** parameter.

The valid range of `moduleHeight` parameter is from 2 to 127. When the module height is set smaller, some barcode scanners may not read it. Set 3 or more for normal use.

See Table 4-21 Alignment (PrintAlignment) for available setting in `alignment` parameter.

See Table 4-27 PDF417 Symbol (Pdf417Symbol) for available setting in `pdf417Symbol` parameter.

Error `SIIPrinterException` is thrown when an error occurs while this method is to be called.
See "4.3.3 SIIPrinterException Class" for details on the error.

Reference See "Appendix B Barcode Size List" for details of the barcode size.

printQRcode

Print QR code

Target Mobile printer / POS printer

Syntax (a) - (void) `printQRcode:`(NSString *)text
 errorCorrection:(ErrorCorrection)errorCorrection
 moduleSize:(ModuleSize)moduleSize
 alignment:(PrintAlignment)alignment;

(b) - (void) `printQRcode:`(NSString *)text
 errorCorrection:(ErrorCorrection)errorCorrection
 moduleSize:(ModuleSize)moduleSize
 alignment:(PrintAlignment)alignment
 model:(QrModel)model;

Parameter `text` Barcode data to send a printer
`errorCorrection` Error correction level
`moduleSize` Module Size
`alignment` Alignment
`model` QR code model

Description This method prints QR code. The type (a) is a QR code model 2 fixed.

Also the version for either type (a) or (b) is automatically set depends on the number of data specified on `text` parameter.

See Table 4-26 Error Correction Level (ErrorCorrection) for available setting in `errorCorrection` parameter.

See Table 4-23 Module Size (ModuleSize) for available setting in `moduleSize` parameter.

See Table 4-21 Alignment (PrintAlignment) for available setting in `alignment` parameter.

See Table 4-28 QR Code Model (QrModel) for available setting in the `model` parameter.

Error `SIIPrinterException` is thrown when an error occurs while this method is to be called.
See "4.3.3 SIIPrinterException Class" for details on the error.

Reference See "Appendix B Barcode Size List" for details of the barcode size.

printDataMatrix

Print Data Matrix

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printDataMatrix: (NSString *)text dataMatrixModule: (DataMatrixModule) dataMatrixModule moduleSize: (ModuleSize) moduleSize alignment: (PrintAlignment) alignment;</pre>
Parameter	<p>text Barcode data to send to the printer dataMatrixModule The number of the Data Matrix modules moduleSize Module Size alignment Alignment</p>
Description	<p>This method prints Data Matrix.</p> <p>See Table 4-29 Data Matrix Module (DataMatrixModule) for available setting in dataMatrixModule parameter.</p> <p>See Table 4-23 Module Size (ModuleSize) for available setting in moduleSize parameter.</p> <p>See Table 4-21 Alignment (PrintAlignment) for available setting in alignment parameter.</p>
Error	<p>SIIPrinterException is thrown when an error occurs while this method is to be called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>
Reference	See "Appendix B Barcode Size List" for details of the barcode size.

printMaxiCode

Print MaxiCode

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printMaxiCode: (NSString *)text maxiCodeMode: (MaxiCodeMode) maxiCodeMode alignment: (PrintAlignment) alignment;</pre>
Parameter	<p>text Barcode data to send to the printer</p> <ul style="list-style-type: none"> • When maxiCodeMode parameter is SII_PM_MAXI_CODE_2: <p>Add the service class (3 digits), the country code (3 digits), and the postal code (9 digits) in the beginning of data.</p> <ul style="list-style-type: none"> • When maxiCodeMode parameter is SII_PM_MAXI_CODE_3: <p>Add the service class (3 digits), the country code (3 digits), and the postal code (6 digits) in the beginning of data.</p> <p>maxiCodeMode MaxiCode mode alignment Alignment</p>
Description	<p>This method prints MaxiCode.</p> <p>See Table 4-30 MaxiCode Mode (MaxiCodeMode) for available setting in maxiCodeMode parameter.</p> <p>See Table 4-21 Alignment (PrintAlignment) for available setting in alignment parameter.</p>

Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See "4.3.3 SIIPrinterException Class " for details on the error.
Reference	See "Appendix B Barcode Size List" for details of the barcode size.

printGS1DataBarStacked

Print GS1 Databar Stacked

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printGS1DataBarStacked:(NSString *)text moduleSize:(ModuleSize)moduleSize alignment:(PrintAlignment)alignment;</pre>
Description	This method is not supported. SIIPrinterException is thrown when this method is executed.

printGS1DataBarStackedOmnidirectional

Print GS1 Databar Stacked Omni-directional

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printGS1DataBarStackedOmnidirectional:(NSString *)text moduleHeight:(NSInteger)moduleHeight moduleSize:(ModuleSize)moduleSize alignment:(PrintAlignment)alignment;</pre>
Description	This method is not supported. SIIPrinterException is thrown when this method is executed.

printGS1DataBarExpandedStacked

Print GS1 Databar Expanded Stacked

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printGS1DataBarExpandedStacked:(NSString *)text column:(NSInteger)column moduleSize:(ModuleSize)moduleSize alignment:(PrintAlignment)alignment;</pre>
Description	This method is not supported. SIIPrinterException is thrown when this method is executed.

printAztecCode

Print Aztec Code

Target	Mobile printer / POS printer
Syntax	<pre>- (void) printAztecCode:(NSString *)text layer:(NSInteger)layer errorCorrection:(NSInteger)errorCorrection moduleSize:(ModuleSize)moduleSize aztecSymbol:(AztecSymbol)aztecSymbol alignment:(PrintAlignment)alignment;</pre>
Description	This method is not supported. SIIPrinterException is thrown when this method is executed.


```

(b) - (void) sendDataFile: (NSString *)fileName
    alignment: (PrintAlignment)alignment;

(c) - (void) sendDataFile: (NSString *)fileName;

```

Parameter	fileName	File path of data to sent to the printer
	alignment	Alignment
	dithering	Dithering

Description This method determines data format based on the file extension specified by **fileName** parameter, converts it to printer-enabled data format, and sends it to a printer. The maximum file size that can be specified is 1M byte (1048576 bytes).

The method of syntax (a) specifies Alignment and Dithering to the sending file.
The method of syntax (b) specifies Alignment to the sending file.
The method of syntax (c) specifies the sending file.

The file extensions capable of sending by **fileName** parameter and sending the file are described below.

- .bmp, .jpg, .jpeg, or .png:
Send data to a printer as image file. When that image file is colored one, it is converted to monochrome image by binarization, and sent to a printer.
Printing start timing of the image depends on the connecting method.
For Bluetooth connection, printing is executed at one time after mapping the image file in memory of a printer.
For TCP/IP connection, printing is executed immediately after a printer receives the image file.
- .txt:
Send data to a printer as text data. Text data format supports UTF-8. Just like **sendText** method, encodes the data to printable text data based on **internationalCharacter** property and **codePage** property, and then sends it to the printer. Also, in this method, the line spacing code is not added to the end of text data.
- .bin or .dat:
Data is sent to a printer as binary data without conversion.
- .htm or .html:
Data is sent to a printer as html data without conversion. When **SII_PM_PRINTER_MODEL_DPU_S245** or **SII_PM_PRINTER_MODEL_DPU_S445** is specified by **printerModel** parameter of **connect** method, this method is not supported, so that **SIIPrinterException** is thrown.

alignment parameter is valid only when the file extension specified on **fileName** parameter is .bmp, .jpg, .jpeg, .png or .txt. See Table 4-21 Alignment (PrintAlignment) for available setting. When **SII_PM_PRINTER_MODEL_DPU_S245** or **SII_PM_PRINTER_MODEL_DPU_S445** is specified by **printerModel** parameter of **connect** method, the alignment is fixed to left.

dithering parameter is valid only when the file extension specified on **fileName** parameter is .bmp, .jpg, .jpeg, or .png. See Table 4-13 Dithering (Dithering) for available setting.

Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.
-------	--

printLogo

Print specified logo (image) on printer

Target	Mobile printer
Syntax	<pre>- (void) printLogo:(NSString *)logoId;</pre>
Parameter	logoId Logo ID to print
Description	This method is valid only for Mobile printer. This method print the logo (image) registered by registerLogo method. Specify registered logo ID in logoId parameter. The valid range of logoId parameter is a character string indicating the value from 0 to 127.
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.


printLogo

Print specified logo (image) on printer

Target	POS printer
Syntax	<pre>- (void) printLogo:(NSString *)logoId alignment(PrintAlignment)alignment;</pre>
Parameter	logoId Logo ID to print alignment Alignment
Description	This method is valid only for POS printer. This method print the logo (image) registered by registerLogo method. Specify registered logo ID in logoId parameter. The valid range of logoId parameter is 2 characters. The valid characters are ASCII character code from 20h (blank) to 7Eh (tilde) such as alphanumeric ('0' to '9', 'A' to 'Z', 'a' to 'z'). See Table 4-21 Alignment (PrintAlignment) for available setting in alignment parameter.
Error	SIIPrinterException is thrown when an error occurs while this method is to be called. See " 4.3.3 SIIPrinterException Class " for details on the error.

(c) Dedicated method for page mode

The following methods are dedicated methods to use page mode. An example for the print process in page mode is shown below.

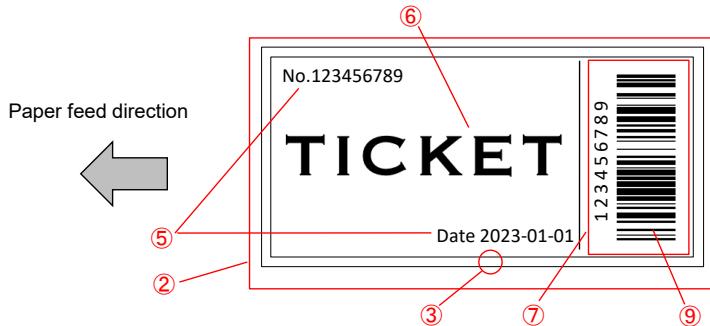

① Start page mode

```
[printerManager enterPageMode];
```

② Specify print area of page mode

```
[printerManager setPageModeArea:0 y:0 width:355 height:576];
```

③ Specify a rectangle and a ruled line

```
[printerManager printPageModeRectangle:0 startY:0 endX:344 endY:575 lineStyle:SII_PM_LINESTYLE_THIN];
[printerManager printPageModeRectangle:7 startY:7 endX:336 endY:567 lineStyle:SII_PM_LINESTYLE_THIN];
[printerManager printPageModeLine:11 startY:404 endX:334 endY:404 lineStyle:SII_PM_LINESTYLE_THIN];
```

④ Specify print direction of page mode

```
[printerManager setPageModeDirection: SII_PM_DIRECTION_TOP_TO_BOTTOM];
```

⑤ Specify a character

```
[printerManager printPageModeText:21 startY:47 text:@"NO.123456789"];
[printerManager printPageModeText:212 startY:340 text:@"Date 2023-01-01"];
```

⑥ Specify an image file

```
[NSString *filePath = [[NSBundle mainBundle] pathForResource:@"TicketImage" ofType:@"jpg"];
[printerManager printPageModeImageFile:10 startY:222 fileName:filePath
dithering:SII_PM_DITHERING_DISABLE];
```

⑦ Specify print area of page mode

```
[printerManager setPageModeArea:0 y:404 width:345 height:163];
```

⑧ Specify print direction

```
[printerManager setPageModeDirection:SII_PM_DIRECTION_LEFT_TO_RIGHT];
```

⑨ Specify a barcode

```
[printerManager printPageModeBarcode:20 startY:132 barcodeSymbol:SII_PM_BARCODE_CODE128
data:[@[@"B123456789" dataUsingEncoding:NSUTF8StringEncoding]
moduleSize:SII_PM_BARCODE_MODULE_WIDTH_2 moduleHeight:80
hriPosition:SII_PM_HRI_POSITION_ABOVE hriFont:SII_PM_FONT_A];
```

⑩ Print in page mode

```
[printerManager printPageMode:SII_PM_CUT_PARTIAL];
```

⑪ Ends page mode

```
[printerManager exitPageMode];
```

enterPageMode

Start page mode

Target	POS printer
Syntax	<code>- (void) enterPageMode;</code>
Description	<p>This method starts page mode. The dedicated method for page mode and common methods to standard mode and page mode can be used after this method execution.</p> <p>Executing <code>exitPageMode</code> method discards the print data kept in the page data buffer and changes the mode to standard mode.</p> <p>Executing <code>printPageMode</code> method prints the print data kept in the page data buffer.</p>
Error	<p><code>SIIPrinterException</code> is thrown when an error occurs while this method is being called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

exitPageMode

End page mode


Target	POS printer
Syntax	<code>- (void) exitPageMode;</code>
Description	Discards the print data kept in the page data buffer and changes the mode to standard mode.
Error	<p><code>SIIPrinterException</code> is thrown when an error occurs while this method is being called.</p> <p>See "4.3.3 SIIPrinterException Class" for details on the error.</p>

setPageModeArea

Specify print area of page mode

Target	POS printer
Syntax	<code>- (void) setPageModeArea: (NSInteger) x y: (NSInteger) y width: (NSInteger) width height: (NSInteger) height;</code>
Parameter	<p>x The horizontal origin (dot) of the print area of page mode 0 represents the left edge on the print area of the printer.</p> <p>y The vertical origin (dot) of the print area of page mode The valid range is 0 to 2399. 0 represents the position where paper feed has not been performed.</p> <p>width The print area width (dot) of page mode</p> <p>height The print area height (dot) of page mode The valid range is 1 to (2400-y).</p>

The valid range of parameter **x** and **width** is shown in the figure below.

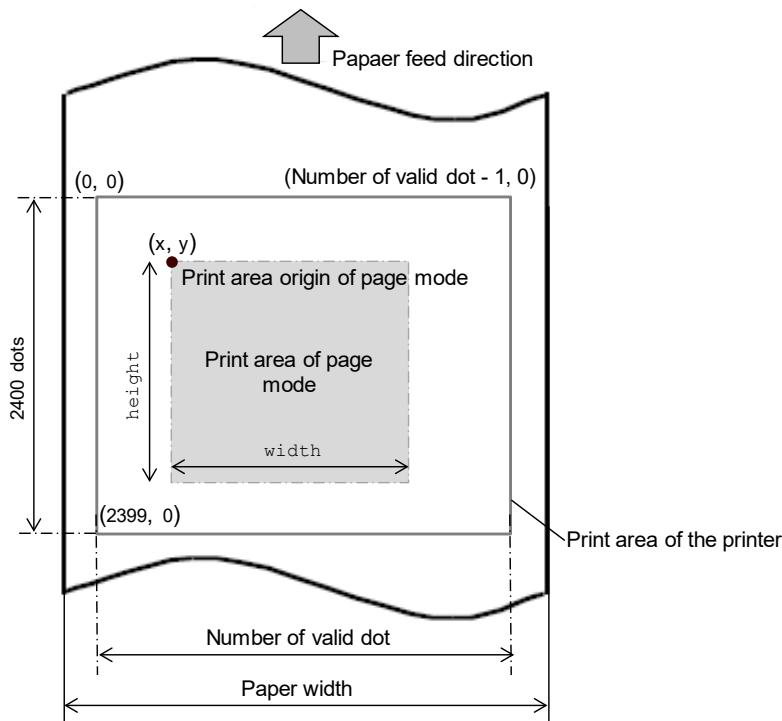

Memory Switch Setting of Printer		Number of Valid Dot	setPageModeArea	
MS4-4 (Paper Width)	MS4-5 (Number of Effective Dots)		x	width
80 mm	576	576	0 to 575	1 to (576 - x)
	512	512	0 to 511	1 to (512 - x)
58 mm	432	432	0 to 431	1 to (432 - x)
	360	360	0 to 359	1 to (360 - x)

The number of valid dots differs depending on the memory switch.

See the technical reference of the target printer for details of memory switch and the setting at shipping.

Description Specifies print area of page mode.

Start page mode by `enterPageMode` method before executing this method.

The print area of page mode can be specified when page mode is started by `enterPageMode` method and then this method is executed after executing the dedicated method for page mode. The data that has been mapped is kept.

The data of the dedicated method for page mode is mapped to the print area of page mode added by this method after executing this method.

The print area of page mode is parameter **x** = 0, **y** = 0, **width** = number of a valid dot, **height** = 2400 after executing `enterPageMode` method.

Error `SIIPrinterException` is thrown when an error occurs while this method is being called.

See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

setPageModeDirection

Specify print direction of page mode

Target	POS printer
Syntax	- (void) setPageModeDirection: (Direction)direction;
Parameter	direction Print direction See Table 4-32 Print Direction (Direction) for available setting.
Description	Specifies print direction of page mode. Start page mode by enterPageMode method before executing this method. The print direction is left to right after executing enterPageMode method.
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.

setPageModeLineSpacing

Specify line spacing of page mode

Target	POS printer
Syntax	- (void) setPageModeLineSpacing: (NSInteger)lineSpacing;
Parameter	lineSpacing Line spacing (dot) of page mode The valid range is 0 to 255.
Description	Specifies line spacing of page mode. Start page mode by enterPageMode method before executing this method. The line spacing is 34 dots after executing enterPageMode method.
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.

printPageMode

Print page mode

Target	POS printer
Syntax	- (void) printPageMode: (CuttingMethod)CuttingMethod;
Parameter	cuttingMethod Cutting method See Table 4-31 Cutting Method (CuttingMethod) for available setting.
Description	Prints the print data kept in page data buffer. The print data is kept after printing. The print data is discarded at the timing of the followings: <ul style="list-style-type: none"> · Execute enterPageMode method · Execute disconnect method · Execute exitPageMode method
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.

printPageModeText

Send text data of page mode

Target	POS printer
Syntax	<pre>- (void) printPageModeText: (NSInteger)startX startY: (NSInteger)startY text: (NSString *)text;</pre>
Parameter	<p>startX The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>startY The vertical reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>text Text data Data size that can be specified at 1 time is 16 KB (16384 bytes).</p>
Description	<p>Maps the text data on the print area of page mode. This method encodes the specified text data to printable text data based on internationalCharacter property and codePage property.</p> <p>Start page mode by enterPageMode method before executing this method.</p>
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.

printPageModeTextEx

Send format specified text data of page mode

Target	POS printer
Syntax	<pre>- (void) printPageModeTextEx: (NSInteger)startX startY: (NSInteger)startY text: (NSString *)text bold: (CharacterBold)bold underline: (CharacterUnderline)underline reverse: (CharacterReverse)reverse font: (CharacterFont)font scale: (CharacterScale)scale;</pre>
Parameter	<p>startX The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>startY The vertical reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>text Text data Data size that can be specified at 1 time is 16 KB (16384 bytes).</p> <p>bold Bold character See Table 4-15 Bold Print (CharacterBold) for available setting.</p> <p>underline Underline See Table 4-16 Underline (CharacterUnderline) for available setting.</p>

reverse	Reverse print See Table 4-17 Reverse Print (CharacterReverse) for available setting.
font	Font See Table 4-19 Character Font (CharacterFont) for available setting.
scale	Character scale See Table 4-20 Character Scale (CharacterScale) for available setting.
Description	Maps the format specified text data on the print area of page mode. This method encodes the specified text data to printable text data based on internationalCharacter property and codePage property. Start page mode by enterPageMode method before executing this method.
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.

printPageModeBarcode

Print barcode of page mode

Target	POS printer
Syntax	<pre>(a) - (void) printPageModeBarcode: (NSInteger) startX startY: (NSInteger) startY barcodeSymbol: (BarcodeSymbol) barcodeSymbol text: (NSString *) text moduleSize: (ModuleSize) moduleSize moduleHeight: (NSInteger) moduleHeight hriPosition: (HriPosition) hriPosition hriFont: (CharacterFont) hriFont; (b) - (void) printPageModeBarcode: (NSInteger) startX startY: (NSInteger) startY barcodeSymbol: (BarcodeSymbol) barcodeSymbol text: (NSString *) text moduleSize: (ModuleSize) moduleSize moduleHeight: (NSInteger) moduleHeight hriPosition: (HriPosition) hriPosition hriFont: (CharacterFont) hriFont nwRatio: (NwRatio) nwRatio; (c) - (void) printPageModeBarcode: (NSInteger) startX startY: (NSInteger) startY barcodeSymbol: (BarcodeSymbol) barcodeSymbol data: (NSData*) data moduleSize: (ModuleSize) moduleSize moduleHeight: (NSInteger) moduleHeight hriPosition: (HriPosition) hriPosition hriFont: (CharacterFont) hriFont; (d) - (void) printPageModeBarcode: (NSInteger) startX startY: (NSInteger) startY barcodeSymbol: (BarcodeSymbol) barcodeSymbol text: NSString *) text moduleSize: ModuleSize) moduleSize;</pre>

Parameter	startX	The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.
	startY	The vertical reference point (dot) from the starting point The valid range is 0 to 2399.
	barcodeSymbol	BarcodeSymbol See Table 4-22 Barcode Symbol (BarcodeSymbol) for available setting and correspondent syntax.
	text(data)	Barcode data to send to the printer The input conditions for barcode are as follows.

Barcode	Number of Data	Inputtable Data Character String (Data)	Remarks
UPC-A	11 to 12 characters	'0' to '9'	
UPC-E	11 to 12 characters	'0' to '9'	
EAN13 JAN13	12 to 13 characters	'0' to '9'	
EAN8 JAN8	7 to 8 characters	'0' to '9'	
CODE39	1 to 150 characters	'0' to '9' 'A' to 'Z' '\$', '%', '+', '-', ':', '/'	Start code and stop code ('*') are automatically added.
CODE93	1 to 150 bytes	(0x00 to 0x2E)	Input data with 0x2F or more at the end.
CODE128	2 to 150 bytes	(0x00 to 0x66)	When inputting the start code (0x67 to 0x69) of the CODE128 code set. Input data with 0x67 or more at the end.
		(0x00 to 0x7F)	When starting with a CODE128 special code start code ("A", "B", "C").
ITF	2 to 150 characters (However, an even number)	'0' to '9'	
CODABAR	1 to 150 characters	'0' to '9' '\$', '+', '-', ':', '/', '/'	It is needed to specify one of 'A' to 'D' at the beginning and end.
EAN13 add-on JAN13 add-on	Add-on 2: 14 to 15 characters Add-on 5: 17 to 18 characters	'0' to '9'	

moduleSize	Barcode width See Table 4-23 Module Size (ModuleSize) for available setting.
moduleHeight	Barcode height (dot) The valid range is 1 to 255.
hriPosition	HRI character print position See Table 4-24 HRI Character Print Position (HriPosition) for available setting.

hriFont HRI character font
 See Table 4-19 Character Font (**CharacterFont**) for available setting.

nwRatio N:W ratio
 See Table 4-25 N:W Ratio (**NwRatio**) for available setting.
 Depending on specified parameter **nwRatio** and
moduleSize,
 the wide element width is set as shown in the following table.

moduleSize	nwRatio		
	SII_PM_NWRATIO_1TO2	SII_PM_NWRATIO_1TO2_5	SII_PM_NWRATIO_1TO3
SII_PM_BARCODE_MODULE_WIDTH_2	0.500 mm (4 dots)	0.625 mm (5 dots)	0.750 mm (6 dots)
SII_PM_BARCODE_MODULE_WIDTH_3	0.750 mm (6 dots)	1.000 mm (8 dots)	1.125 mm (9 dots)
SII_PM_BARCODE_MODULE_WIDTH_4	1.000 mm (8 dots)	1.250 mm (10 dots)	1.500 mm (12 dots)
SII_PM_BARCODE_MODULE_WIDTH_5	1.250 mm (10 dots)	1.625 mm (13 dots)	1.875 mm (15 dots)
SII_PM_BARCODE_MODULE_WIDTH_6	1.500 mm (12 dots)	1.875 mm (15 dots)	2.250 mm (18 dots)

Description Maps the barcode on the print area of page mode.
 The method of syntax (a) specifies the barcode data by character string.
 The method of syntax (b) specifies the barcode data by character string and specifies N:W ratio of the barcode.
 The method of syntax (c) specifies the barcode data by the array of bytes.
 The method of syntax (d) is not supported.

Start page mode by **enterPageMode** method before executing this method.

Error **SIIPrinterException** is thrown when an error occurs while this method is being called.
 See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

Note Map the print data of the barcode not to overlap the other print data.

Reference See "Appendix B Barcode Size List" for details of the barcode size.

printPageModePDF417

Print PDF417 of page mode

Target POS printer

Syntax (a) – (void) **printPageModePDF417**: (NSInteger) startX
 startY: (NSInteger) startY
 text: (NSString *) text
 errorCorrection: (ErrorCorrection) errorCorrection
 row: (NSInteger) row
 column: (NSInteger) column
 moduleSize: (ModuleSize) moduleSize
 moduleHeight: (NSInteger) moduleHeight
 pdf417Symbol: (Pdf417Symbol) pdf417Symbol;

```
(b) - (void) printPageModePDF417: (NSInteger)startX
    startY: (NSInteger)startY
    text: (NSString *)text
    errorCorrection: (ErrorCorrection)errorCorrection
    row: (NSInteger)row
    column: (NSInteger)column
    moduleSize: (ModuleSize)moduleSize
    moduleHeight: (NSInteger)moduleHeight;
```

Parameter	startX	The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.
	startY	The vertical reference point (dot) from the starting point The valid range is 0 to 2399.
	text	Barcode data
	errorCorrection	Error correction level See Table 4-26 Error Correction Level (ErrorCorrection) for available setting.
	row	The number of rows (row) The valid range is 0, 3 to 90. When 0 is specified, the number of rows is automatically set.
	column	The number of columns in data area The valid range is 0 to 30. When 0 is specified, the number of columns in the data area is automatically set.
	moduleSize	Nominal fine element width See Table 4-23 Module Size (ModuleSize) for available setting.
	moduleHeight	Module height (dot) The valid range is 2 to 127. When the module height is set smaller, some barcode scanners may not read it. Set 3 or more for normal use.
	pdf417Symbol	Symbol of PDF417 See Table 4-27 PDF417 Symbol (Pdf417Symbol) for available setting.
Description	Maps PDF417 on the print area of page mode. The method of syntax (a) specifies PDF417 symbol. The method of syntax (b) is fixed to standard PDF417.	
	Start page mode by enterPageMode method before executing this method.	
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.	
Note	Map the print data of the barcode not to overlap the other print data.	
Reference	See "Appendix B Barcode Size List" for details of the barcode size.	

printPageModeQRcode

Print QR Code of page mode

Target	POS printer
Syntax	<pre>(a) - (void) printPageModeQRcode: (NSInteger)startX startY: (NSInteger)startY text: (NSString *)text errorCorrection: (ErrorCorrection)errorCorrection moduleSize: (ModuleSize)moduleSize model: (QrModel)model; (b) - (void) printPageModeQRcode: (NSInteger)startX startY: (NSInteger)startY text: (NSString *)text errorCorrection: (ErrorCorrection)errorCorrection moduleSize: (ModuleSize)moduleSize;</pre>
Parameter	startX The horizontal reference point (dot) from the starting point The valid range is 0 to 2399. startY The vertical reference point (dot) from the starting point The valid range is 0 to 2399. text Barcode data The version for either syntax (a) or (b) is automatically set depending on the number of data specified on parameter text . errorCorrection Error correction level See Table 4-26 Error Correction Level (ErrorCorrection) for available setting. moduleSize Module size See Table 4-23 Module Size (ModuleSize) for available setting. model QR Code Model See Table 4-28 QR Code Model (QrModel) for available setting.
Description	Maps QR Code on the print area of page mode. The method of syntax (a) specifies QR Code Model. The method of syntax (b) is fixed to QR Code Model 2. Start page mode by enterPageMode method before executing this method.
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.
Note	Map the print data of the barcode not to overlap the other print data.
Reference	See "Appendix B Barcode Size List" for details of the barcode size.

printPageModeDataMatrix

Print Data Matrix of page mode

Target	POS printer	
Syntax	<pre>- (void) printPageModeDataMatrix: (NSInteger) startX startY: (NSInteger) startY text: (NSString *) text dataMatrixModule: (DataMatrixModule) dataMatrixModule moduleSize: (ModuleSize) moduleSize;</pre>	
Parameter	startX	The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.
	startY	The vertical reference point (dot) from the starting point The valid range is 0 to 2399.
	text	Barcode data
	dataMatrixModule	The number of Data Matrix modules See Table 4-29 Data Matrix Module (DataMatrixModule) available setting.
	moduleSize	Module size See Table 4-23 Module Size (ModuleSize) for available setting.
Description	Maps Data Matrix on the print area of page mode. Start page mode by enterPageMode method before executing this method.	
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.	
Note	Map the print data of the barcode not to overlap the other print data.	
Reference	See "Appendix B Barcode Size List" for details of the barcode size.	

printPageModeMaxiCode

Print MaxiCode of page mode

Target	POS printer	
Syntax	<pre>- (void) printPageModeMaxiCode: (NSInteger) startX startY: (NSInteger) startY text: (NSString *) text maxiCodeMode: (MaxiCodeMode) maxiCodeMode;</pre>	
Parameter	startX	The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.
	startY	The vertical reference point (dot) from the starting point The valid range is 0 to 2399.
	text	Barcode data <ul style="list-style-type: none"> • When parameter maxiCodeMode is SII_PM_MAXI_CODE_2 Add the service class (3 digits), the country code (3 digits), and the postal code (9 digits) to the beginning of the data.

- When parameter `maxiCodeMode` is **SII_PM_MAXI_CODE_3**
Add the service class (3 digits), the country code (3 digits), and the postal code (6 digits) to the beginning of the data.

`maxiCodeMode` MaxiCode Mode
See Table 4-30 MaxiCode Mode (MaxiCodeMode) available setting.

Description	Maps MaxiCode on the print area of page mode. Start page mode by <code>enterPageMode</code> method before executing this method.
Error	<code>SIIPrinterException</code> is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.
Note	Map the print data of the barcode not to overlap the other print data.
Reference	See "Appendix B Barcode Size List" for details of the barcode size.

printPageModeGS1DataBarStacked

Print GS1 Databar Stacked of page mode

Target	POS printer
Syntax	<pre>- (void) printPageModeGS1DataBarStacked::(NSInteger)startX startY:(NSInteger)startY text:(NSString *)text moduleSize:(ModuleSize)moduleSize;</pre>
Description	This method is not supported. <code>SIIPrinterException</code> is thrown when this method is executed.

printPageModeGS1DataBarStackedOmnidirectional

Print GS1 Databar Stacked Omni-directional of page mode

Target	POS printer
Syntax	<pre>- (void) printPageModeGS1DataBarStackedOmnidirectional: (NSInteger)startX startY:(NSInteger)startY text:(NSString *)text moduleHeight:(NSInteger)moduleHeight moduleSize:(ModuleSize)moduleSize;</pre>
Description	This method is not supported. <code>SIIPrinterException</code> is thrown when this method is executed.

printPageModeGS1DataBarExpandedStacked

Print GS1 Databar Expanded Stacked of page mode

Target POS printer

Syntax

```
- (void) printPageModeGS1DataBarExpandedStacked: (NSInteger)startX
                                         startY: (NSInteger)startY
                                         text: (NSString *)text
                                         column: (NSInteger)column
                                         moduleSize: (ModuleSize)moduleSize;
```

Description This method is not supported. **SIIPrinterException** is thrown when this method is executed.

printPageModeAztecCode

Print Aztec Code of page mode

Target POS printer

Syntax

```
- (void) printPageModeAztecCode: (NSInteger)startX
                                         startY: (NSInteger)startY
                                         text: (NSString *)text
                                         layer: (NSInteger)layer
                                         errorCorrection: (NSInteger)errorCorrection
                                         moduleSize: (ModuleSize)moduleSize
                                         aztecSymbol: (AztecSymbol)aztecSymbol;
```

Description This method is not supported. **SIIPrinterException** is thrown when this method is executed.

sendPageModeBinary

Send binary data of page mode

Target POS printer

Syntax

```
- (void) sendPageModeBinary: (NSData*) data;
```

Parameter **binary** Binary data
Data size that can be specified at 1 time is 256 KB (262144 bytes).

Description Maps binary data on the print area of page mode.

Start page mode by **enterPageMode** method before executing this method.

This method sends the specified binary data to the printer without conversion.

By sending printer commands as binary data with this method, printer functions which are not supported in the library become available.

Error **SIIPrinterException** is thrown when an error occurs while this method is being called.
See "[4.3.3 SIIPrinterException Class](#)" for details on the error.

Note This method may execute unexpected performance depending on the data to send.
Please ensure the performance with your actual device in advance.

printPageModeImageFile

Draw Image file of page mode


Target	POS printer
Syntax	<pre>- (void) printPageModeImageFile: (NSInteger)startX startY: (NSInteger)startY fileName: (NSString *)fileName dithering: (Dithering)dithering;</pre>
Parameter	<p>startX The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>startY The vertical reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>fileName File path of the data The maximum file size that can be specified is 1 MB (1048576 bytes). The image files that can be sent are .bmp, .jpg, .jpeg, .png. Colored image file is converted to monochrome image by binarization and registered.</p> <p>dithering Dithering See Table 4-13 Dithering (Dithering) for available setting.</p>
Description	<p>Maps the image file on the print area of page mode.</p> <p>Start page mode by enterPageMode method before executing this method.</p>
Error	SIIPrinterException is thrown when an error occurs while this method is being called. See "4.3.3 SIIPrinterException Class" for details on the error.

printPageModeRectangle

Draw rectangle image of page mode

Target	POS printer
Syntax	<pre>- (void) printPageModeRectangle: (NSInteger)startX startY: (NSInteger)startY endX: (NSInteger)endX endY: (NSInteger)endY lineStyle: (LineStyle)lineStyle;</pre>
	<p>startX The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>startY The vertical reference point (dot) from the starting point The valid range is 0 to 2399.</p> <p>endX The horizontal reference point (dot) from the ending point The valid range is 0 to 2399.</p> <p>endY The vertical reference point (dot) from the ending point The valid range is 0 to 2399.</p> <p>lineStyle Line style See Table 4-33 Line Style (LineStyle) for available setting.</p>

Description	Maps the rectangle image on the print area of page mode. Start page mode by <code>enterPageMode</code> method before executing this method. The rectangle is mapped to the parameter <code>direction</code> of <code>setPageModeDirection</code> method as shown in the figure below.
-------------	---

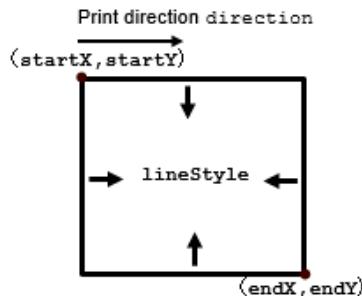

The example of the parameter setting to the image is shown below.
Example: Draw a square with a medium solid line (4 dots) at 240 dots (30 mm) from the starting point.

Image	Parameter
	startX 0 startY 0 endX 239 endY 239 lineStyle SII_PM_LINESTYLE_MEDIUM


Error	<code>SIIPrinterException</code> is thrown when an error occurs while this method is being called. See " 4.3.3 SIIPrinterException Class " for details on the error.
-------	---

printPageModeLine

Print ruled line of page mode

Target	POS printer	
Syntax	<pre>- (void) printPageModeLine::(NSInteger)startX startY:(NSInteger)startY endX:(NSInteger)endX endY:(NSInteger)endY linestyle:(LineStyle)linestyle;</pre>	
Parameter	startX	The horizontal reference point (dot) from the starting point The valid range is 0 to 2399.
	startY	The vertical reference point (dot) from the starting point The valid range is 0 to 2399.
	endX	The horizontal reference point (dot) from the ending point The valid range is 0 to 2399.
	endY	The vertical reference point (dot) from the ending point The valid range is 0 to 2399.

lineStyle	Line style See Table 4-33 Line Style (LineStyle) for available setting.
Description	<p>Maps the ruled line on the print area of page mode.</p> <p>Start page mode by enterPageMode method before executing this method.</p> <p>A diagonal stroke cannot be drawn by this method.</p> <p>The ruled line is mapped to the parameter direction of setPageModeDirection method as shown in the figure below.</p>

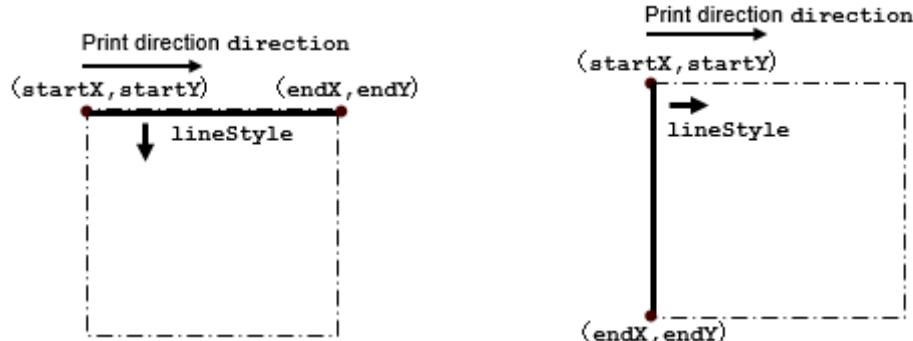

Mapping direction of horizontal ruled line Mapping direction of vertical ruled line

The setting example of the parameter to the image is shown below.

Example: Draw a horizontal ruled line of a square with a medium solid line (4 dots) at 240 dots (30 mm) from the starting point.

Image	Parameter
<p>(startX=0,startY=0 (endX=239,endY=0) ①↓ lineStyle= SII_PM_LINESTYLE_MEDIUM (4 dots)</p> <p>(startX=0,startY=236)(endX=239,endY=236) ②↓ lineStyle= SII_PM_LINESTYLE_MEDIUM (4 dots)</p>	<p>①</p> <pre>startX 0 startY 0 endX 239 endY 0 lineStyle SII_PM_LINESTYLE_MEDIUM</pre> <p>②</p> <pre>startX 0 startY 236 endX 239 endY 236 lineStyle SII_PM_LINESTYLE_MEDIUM</pre>

Example: Draw a vertical ruled line of a square with a medium solid line (4 dots) at 240 dots (30 mm) from the starting point.

Image	Parameter
<pre>(startX=0,startY=0)(startX=236,startY=0) lineStyle= SII_PM_LINESTYLE_MEDIUM (4 dots) (endX=0,endY=239)(endX=236,endY=239)</pre>	<pre>(1) startX 0 startY 0 endX 0 endY 239 lineStyle SII_PM_LINESTYLE_MEDIUM (2) startX 236 startY 0 endX 236 endY 239 lineStyle SII_PM_LINESTYLE_MEDIUM</pre>

Error **SIIPrinterException** is thrown when an error occurs while this method is being called.
 See "4.3.3 **SIIPrinterException Class**" for details on the error.

printPageModeLogo

Print logo of page mode

Target POS printer

Syntax - (void) **printPageModeLogo:** (NSInteger)startX
 startY:(NSInteger)startY
 logoId:(NSString *)logoId;

Parameter **startX** The horizontal reference point (dot) from the starting point
 The valid range is 0 to 2399.

startY The vertical reference point (dot) from the starting point
 The valid range is 0 to 2399.

logoId Logo ID to print (key code)
 Specify the ID of the registered logo as a character string

Description Maps the registered logo on the print area of page mode.

Start page mode by **enterPageMode** method before executing this method.

Error **SIIPrinterException** is thrown when an error occurs while this method is being called.
 See "4.3.3 **SIIPrinterException Class**" for details on the error.

(6) Common property detail to standard mode and page mode

sendTimeout	Timeout period when sending data
Target	Mobile printer / POS printer
Syntax	<code>@property NSInteger sendTimeout;</code>
Description	This property maintains the timeout period when data is sent. This property is configurable or obtainable whether a printer is connected or not. However, the configured timeout period is enabled at the next data sending. When the configured value is outside of the valid range, 100 is set when the set value is lower than 100, or 300000 is set when the set value is more than 300000.
Default	10000 msec (10 seconds)
Effective range	100 msec to 300000 msec (5 minutes)
receiveTimeout	Timeout period when receiving data
Target	Mobile printer / POS printer
Syntax	<code>@property NSInteger receiveTimeout;</code>
Description	This property maintains the timeout period when data is received. This property is configurable or obtainable whether a printer is connected or not. When the configured value is outside of the valid range, 100 is set when the set value is lower than 100, or 300000 is set when the set value is more than 300000.
Default	10000 msec (10 seconds)
Effective range	100 msec to 300000 msec (5 minutes)
internationalCharacter	Set international character set
Target	Mobile printer / POS printer
Syntax	<code>@property NSInteger internationalCharacter;</code>
Description	This property maintains the configuration of international character set. When text data is sent by <code>sendText</code> method, <code>sendTextEx</code> method, <code>sendDataFile</code> method, or <code>printPageModeText</code> method, or <code>printPageModeTextEx</code> method, the print result of the following character codes varies.
Character codes with the varying print result depending on the configuration of the international character:	
0x23, 0x24, 0x40, 0x5B, 0x5C, 0x5D, 0x5E, 0x60, 0x7B, 0x7C, 0x7D, 0x7E	
See Table 4-8 International Character Setting Constant for details about configurable values. When international character set is not configured, it is initialized to following state depending on a language setting of an iOS device. Also, when invalid value is specified, it is ignored.	
When a language setting of an iOS device is Japanese: SII_PM_COUNTRY_JAPAN	
When a language setting of an iOS device is other languages than Japanese: SII_PM_COUNTRY_USA	

codePage

Code page

Target	Mobile printer / POS printer
Syntax	<code>@property NSInteger codePage;</code>
Description	This property maintains setting values of codepage. The encoder used for sending the text data by <code>sendText</code> method, <code>sendTextEx</code> method, <code>sendDataFile</code> method, <code>printPageModeText</code> method, or <code>printPageModeTextEx</code> method is changed. See Table 4-9 Codepage constant for the details about configurable values. When a codepage is not configured, it is initialized to the following state depending on a language setting of an iOS device. Also, when invalid value is specified, it will be ignored.
When a language setting of an iOS device is Japanese: SII_PM_CODE_PAGE_KATAKANA	
When a language setting of an iOS device is other languages than Japanese: SII_PM_CODE_PAGE_1252	

printerModel

Obtain printer model

Target	Mobile printer / POS printer
Syntax	<code>@property(readonly) NSInteger printerModel;</code>
Description	This property obtains a model value for the connected printer. When a printer is not connected, -1 is returned.
Return value	See Table 4-5 Printer Model Constant for details.
Default	-1

portType

Connecting port type

Target	Mobile printer / POS printer
Syntax	<code>@property(readonly) NSInteger portType;</code>
Description	This property obtains the port type of connecting printer in use during connection with a printer. When a printer is not connected, -1 is returned.
Return value	See Table 4-6 Port Type Constant for details.
Default	-1

isConnect

Verify connection state with a printer

Target	Mobile printer / POS printer
Syntax	<code>@property(readonly) BOOL isConnect;</code>
Description	This property maintains BOOL value with a printer. When the <code>connect</code> method succeeds, this property is YES. After <code>connect</code> method, when <code>disconnect</code> method succeeds, this property becomes NO.
Return value	Following values are returned depending on the connection state with a printer.

YES	Connected to a printer
NO	Disconnected to a printer

socketKeepingTime

Socket keeping time

Target POS printer

Syntax `@property NSInteger socketKeepingTime;`

Description This method is valid only for POS printer. This property maintains the setting of socket keeping time during TCP/IP connection. For socket keeping time, set the same time as Network Printer Receive Timeout. The setting of Network Printer Receive Timeout can be changed in "SII RP Utility" with the iOS app on the App Store.
This property is configurable and obtainable whether a printer is connected or not. However, socket keeping time is enabled at the next execution of `connect` method (TCP/IP). Moreover, when configured value is outside of the valid range, set 6000 when the set value is lower than 6000 and set 300000 when the set value is more than 300000.

Default 300000msec (5 minutes)

Effective range 60000 to 300000msec (5 minutes)

delegate

Register delegate

Target Mobile printer / POS printer

Syntax `@property(weak, nonatomic) id<SIIPrinterManagerDelegate> delegate;`

Description Registers a delegate object that receives notifications from the printer.

Specify an object conforming to `SIIPrinterManagerDelegate` protocol.

When this property is executed with the delegate object registered, the already registered delegate object becomes disabled, and a new delegate object is registered.

When specifying nil for this property, the notification of the printer status is stopped.

4.3.2 **SIIPrinterInfo** Class

This class stores printer information searched by printer search method. This class obtains printer model, MAC address, and IP address from the searched printer information.

(1) Method List

This class stores the printer information searched by printer searching method. This class obtains printer model, MAC address, and IP address from the searched printer information.

The list of methods provided by **SIIPrinterInfo** class is shown in the following table.

Table 4-42 Method of SIIPrinterInfo Class

Method	Function Summary	Target	
		Mobile	POS
SIIPrinterInfo	Constructor for printer information class	Not supported	Supported

(2) Property List

The list of methods provided by the **SIIPrinterInfo** class is shown in the following table.

Table 4-43 Property of SIIPrinterInfo Class

Method	Access	Function Summary	Target	
			Mobile	POS
name	R	Obtain printer model name	Not supported	Supported
mac	R	Obtain MAC address	Not supported	Supported
ip	R	Obtain IP address	Not supported	Supported

(3) Method Details

IIPrinterInfo		Constructor
Target	POS printer	
Syntax	SIIPrinterInfo	
Description		This method is valid only for POS printer. This method is used for storing printer information searched by printer searching method.

(4) Property Details

name	Obtain printer model name
Target	POS printer
Syntax	<code>@property NSString *name;</code>
Description	This property is valid only for POS printer. This property obtains printer model name searched by printer searching method.
mac	Obtain MAC address
Target	POS printer
Syntax	<code>@property NSString *mac;</code>
Description	This property is valid only for POS printer. This property obtains MAC address searched by printer searching method.
ip	Obtain IP address
Target	POS printer
Syntax	<code>@property NSString *ip;</code>
Description	This property is valid only for POS printer. This property obtains IP address searched by printer searching method.

4.3.3 SIIPrinterException Class

(1) Method List

The list of methods provided by **SIIPrinterException** class is shown in the following table.

Table 4-44 Method of SIIPrinterException Class

Method	Function Summary	Target	
		Mobile	POS
SIIPrinterException	Exception class thrown when API for SIIPrinterManager class is called.	Supported	Supported

(2) Property List

The list of property provided by the **SIIPrinterException** class is shown in the following table.

Table 4-45 Property of SIIPrinterException Class

Property	Access	Function Summary	Target	
			Mobile	POS
errorCode	R	Obtain error code	Supported	Supported
errorMessage	R	Obtain error message	Supported	Supported

(3) Constant List

Constants used for obtaining error codes are shown in the following table.

Table 4-46 Error Codes List

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_ERROR_ACCESS_DENIED	Failed to get the handle.*1	-1	Supported	Supported
	An unavailable port was specified.		Supported	Supported
SII_PM_ERROR_SHARING_VIOLATION	An already opened port was specified.	-11	Supported	Supported
SII_PM_ERROR_PORT_NOT_OPENED	The port is not open.	-12	Supported	Supported
SII_PM_ERROR_DEVICE_NOT_CONNECTED	A printer with the specified Bluetooth device name does not exist.	-21	Supported	Supported
	A printer with the specified IP address does not exist.		Not supported	Supported
SII_PM_ERROR_OFFLINE	Disconnected state or the printer is offline.	-22	Supported	Supported
SII_PM_ERROR_DEVICE_INITIALIZE_FAILED	Failed to change the printer settings. Data sending to printer is not completed within the send timeout period, or data receiving from the printer is not completed within the receive timeout period.	-31	Supported	Supported

Constant Name	Description	Value	Target	
			Mobile	POS
SII_PM_ERROR_DATA_SIZE_ZERO	0-byte data was specified.	-101	Supported	Supported
SII_PM_ERROR_OVER_MAX_DATA_SIZE	Maximum data size is exceeded.	-102	Supported	Supported
SII_PM_ERROR_ENCODE_FAILED	An Error occurred in encoding text data.*1	-111	Supported	Supported
SII_PM_ERROR_TIMEOUT	Send timeout occurred.	-201	Supported	Supported
	Receive timeout occurred.		Supported	Supported
SII_PM_ERROR_FILE_NOT_FOUND	The specified file is not found.	-301	Supported	Supported
SII_PM_ERROR_LOW_MEMORY	Memory shortage occurred when loading image file file.	-311	Supported	Supported
SII_PM_ERROR_OVER_MAX_IMAGE	Either or both of width and height of image file exceeds the number of printable maximum dots.	-312	Supported	Supported
SII_PM_ERROR_LOGO_NOT_DEFINED	The logo is not registered.	-313	Not supported	Supported
SII_PM_ERROR_LOW_USER_AREA	Remaining user area is insufficient.	-401	Supported	Supported
SII_PM_ERROR_LOW_EXTERNAL_RAM	Remaining RAM capacity is insufficient.	-402	Supported	Not supported
SII_PM_ERROR_INVALID_NO	The specified value for the logo ID or style sheet number is invalid.	-501	Supported	Supported
SII_PM_ERROR_OVER_STYLE_NUM	The number of style registered in the specified file exceeds rated value (64).	-502	Not supported	Supported
SII_PM_ERROR_PAGE_MODE_SPECIFIED	Page mode is specified.	-511	Not supported	Supported
SII_PM_ERROR_PAGE_MODE_NOT_SPECIFIED	Page mode is not specified.	-512	Not supported	Supported
SII_PM_ERROR_INVALID_PARAM	The specified parameter is invalid.	-9999	Supported	Supported

*1; Abnormality processing might have happened.

(4) Method Details

SIIPrinterException	Constructor
---------------------	-------------

Target Mobile printer / POS printer

Syntax **SIIPrinterException**

Description Exception class thrown when API for **SIIPrinterManager** class is called.

Property Details

errorCode	Obtain error codes
-----------	--------------------

Target Mobile printer / POS printer

Syntax `@property NSInteger errorCode;`

Description This method obtains exception error code thrown.

Return value See Table 4-46 Error Codes List for details.

errorMessage	Obtain error message
--------------	----------------------

Target Mobile printer / POS printer

Syntax `@property NSString *errorMessage;`

Description This method obtains exception error message thrown. Character string to complement **errorCode** property can be obtained.

4.3.4 **SIIPrinterManagerDelegate** Protocol

(1) Method List

Methods provided by **SIIPrinterManagerDelegate** protocol are shown in the following table.

Name	Description
didStatusChange	Notify printer status

(2) Method Details

didStatusChange		Notify printer status
Target	Mobile printer / POS printer	
Syntax	- (void) didStatusChange: (SIIPrinterManager *)printerManager status:(NSInteger)status;	
Parameter		
	printerManager	Calling SIIPrinterManager object
	status	Printer status
Description	This method is called the latest status at the following timing. · When connect method is executed. · When the printer status is changed.	
	This method is called when isConnect property is YES.	
	The notification of the printer status is stopped by disconnect method. The notification of the printer status is stopped by setting nil to delegate property.	
	Mobile printer: After disconnection from the printer, this method notifies 0x00.	
	POS printer: After disconnection from the printer, this method notifies 0x80000000.	
	The library attempts to resume communication with the printer until disconnect method is executed. When communication with the printer becomes possible, this method notifies the latest printer status. See getStatus method for description of the printer status.	
	Do not execute the APIs of SIIPrinterManager class within this method.	

4.3.5 SIISmartLabelManager Class

SIISmartLabelManager class provides the function to convert the label file (*.sl) created using Smart Label Creator into the printable data from the printer.

Do not use this class because it is not supported.

Chapter 5

Sample Program

This chapter describes the sample program provided by the SDK.

5.1 Screen Layout

The SDK includes SiiLibSample as the sample program with Xcode project format.
This section describes the screen of SiiLibSample.

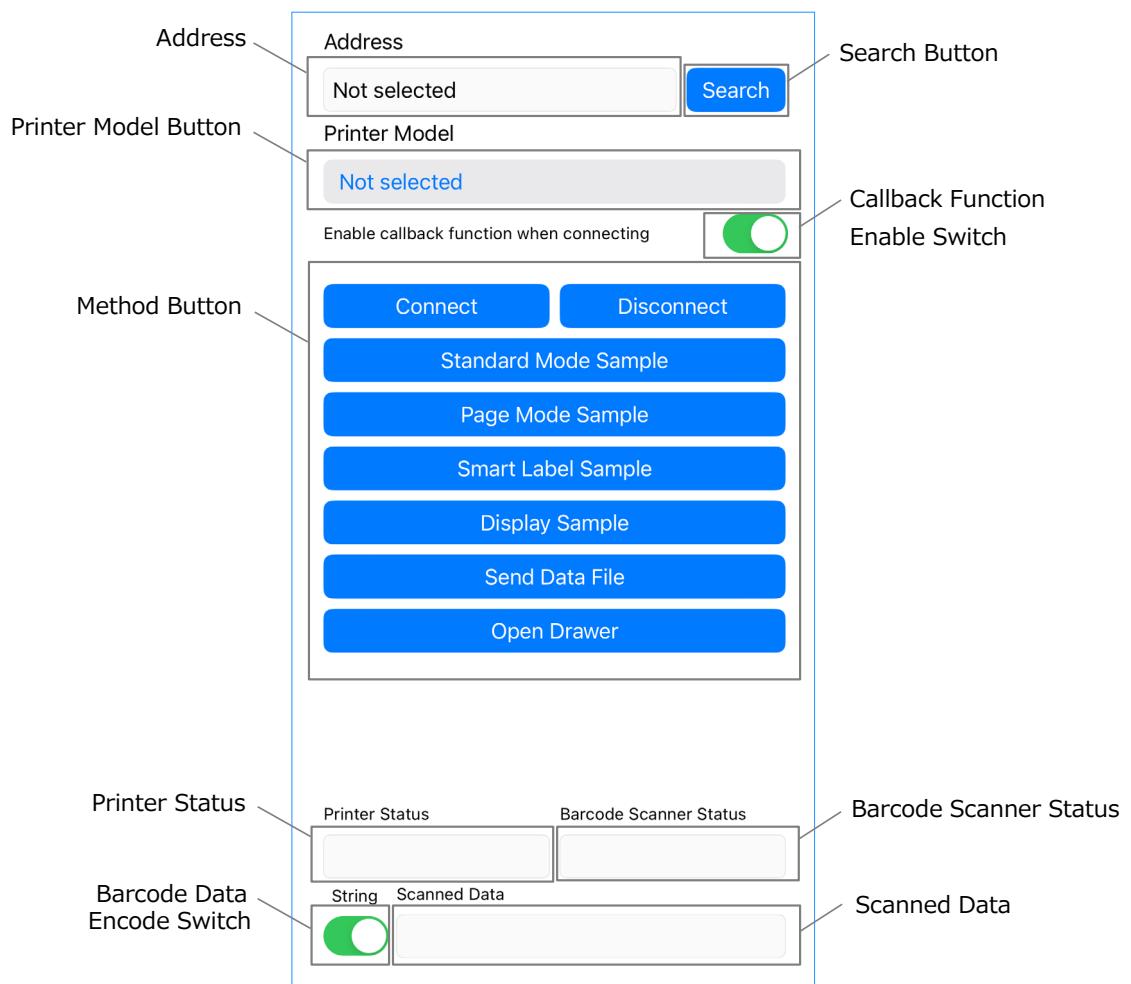


Figure 5-1 SiiLibSample

Table 5-1 Functions of Sample Program

Item	Description
Address	Displays the information about the selected printer.
Printer Model Button	Specifies the printer model. When tapping [Printer Model Button], a list of printer models is displayed. By selecting from the list, the printer model can be entered. When the printer is selected from the printer search screen, the printer model is automatically displayed.
Search Button	Starts searching for printers. Transits to the printer search view. A list of the searched printers is displayed. The printer is selected by tapping the searched printer and returns to the main view.
Callback Function Enable Switch	Select whether to enable the callback function when connecting to the printer. On : Starts the callback function when connecting. Off : The callback function does not respond.
Method Button*1	In addition to the method buttons for executing <code>connect</code> and <code>disconnect</code> , the sample by the combination of some methods can be printed and checked for the operation of peripheral devices.
Printer Status	Displays the printer status. When [Callback Function Enable Switch] is On, the latest status is displayed.
Barcode Scanner Status	Displays the connection status of the barcode scanner. Mobile printer and POS printer do not support the barcode scanner.
Barcode Data Encode Switch	Selects the conversion of barcode data read by the barcode scanner. Mobile printer and POS printer do not support the barcode scanner.
Scanned Data	Displays the barcode data read by the barcode scanner. Mobile printer and POS printer do not support the barcode scanner.

*1: Supported functions vary by model. Only supported functions can be operated.

5.2 Precaution

The sample program is subject to change without notice.

No guarantee of proper operation and support are provided for the sample program.

Chapter 6

Disclaimer

We closely monitor the development of this software in order to avoid problems. However, we are not responsible for any damages arising out of the use of this software.

Appendix A

Character Set

A.1 Codepage Table (Character Code Table)

The codepages when **SII_PM_COUNTRY_USA** is set for the international character set are shown below.
Available code pages vary depending on the printer.

Print results of the specific character codes or display results vary depending on the setting of the international character set.

See "A.2 International Character Set" for the specific character codes.

- Mobile printer

0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\]	^	_
60	'	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80																
90																
A0	.	「	」	、	・	ヲ	ア	イ	ウ	エ	オ	ヤ	ュ	ヨ	ツ	
B0	-	ア	イ	ウ	エ	オ	カ	キ	ク	ケ	コ	サ	シ	ス	セ	ソ
C0	タ	チ	ツ	テ	ト	ナ	ニ	ヌ	ネ	ノ	ハ	ヒ	フ	ヘ	ホ	マ
D0	ミ	ム	メ	モ	ヤ	ユ	ヨ	ラ	リ	ル	レ	ロ	ワ	ン	。	。
E0																
F0																

Figure A-1 SII_PM_CODE_PAGE_KATAKANA

	0 1 2 3 4 5 6 7 8 9	A B C D E F
20	! " # \$ % & ' () * + , - . /	
30	0 1 2 3 4 5 6 7 8 9 : ; < = > ?	
40	@ A B C D E F G H I J K L M N O	
50	P Q R S T U V W X Y Z [\] ^ _	
60	‘ a b c d e f g h i j k l m n o	
70	p q r s t u v w x y z { } ~	
80	€ ‘ ; „ “ ” • – – ~ ™ š < œ ž Ÿ	
90	‘ ¢ £ ₧ ¥ ¦ § ª © ¤ « ¯ ¯ ®	
A0	° ± ¨ ¨ ¨ μ ¶ ¨ ¨ ¨ ¨ ¨ ¨ ¨ ¨ ¨ ¨ ¨	
B0	À Á Â Ã Ä Å Ç È É Ê Ë Ì Í Î Ï	
C0	Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß	
D0	à á â ã ä å ç è é ê ë ì í î ï	
E0	ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ	

Figure A-2 SII_PM_CODE_PAGE_1252 (Latin)

- POS printer

Figure A-3 SII PM CODE PAGE 437 (USA, Standard Europe)

Figure A-4 SII PM CODE PAGE KATAKANA

Figure A-5 SII PM CODE PAGE 850 (Multilingual)

Figure A-6 SII PM CODE PAGE 860 (Portuguese)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	Ç	ü	é	â	À	ä	æ	ç	ê	ë	è	ï	î	=	À	Ù
90	É	È	Ê	Ë	Ï	Û	Ù	Ø	Ô	Ü	Ф	å	Ü	Ø	f	
A0	Í	Ó	Ú	”	„	”	”	”	”	”	”	”	”	”	”	”
B0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
C0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
D0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
E0	á	ß	Γ	π	Σ	σ	μ	τ	φ	θ	Ω	δ	∞	ψ	ε	∩
F0	≡	±	≥	≤	∫	ʃ	÷	≈	°	•	•	√	n	²	■	

Figure A-7 SII_PM_CODE_PAGE_863 (Canadian-French)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	Ç	ü	é	â	à	å	æ	ç	ê	ë	è	ï	î	ì	À	Å
90	É	æ	Æ	ô	ò	û	ù	ÿ	Ö	Ü	ø	å	Ø	Pt	f	
A0	á	í	ó	ú	ñ	Ñ	ä	ö	ë	è	í	ó	ó	í	í	»
B0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
C0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
D0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„
E0	á	ß	Γ	π	Σ	σ	μ	τ	φ	θ	Ω	δ	∞	ψ	ε	∩
F0	≡	±	≥	≤	∫	ʃ	÷	≈	°	•	•	√	n	²	■	

Figure A-8 SII_PM_CODE_PAGE_865 (Nordic)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	?	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}		~	
80	€	,	f	„	…	†	‡	^	‰	Š	Œ	Ž	Ÿ			
90	,	„	”	•	-	-	~	™	š	›	œ	ž	ÿ			
A0	í	ø	å	¤	¥	ł	ſ	„	©	¤	«	¬	-	®	-	
B0	°	±	²	³	‘	μ	¶	·	¹	º	»	¼	½	¾	¿	
C0	À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í	Ï	
D0	Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý	Þ	
E0	à	á	â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í	ï	
F0	ð	ñ	ò	ó	ô	õ	ö	÷	ø	ù	ú	û	ü	ý	þ	

Figure A-9 SII PM CODE PAGE 1252 (Latin)

Figure A-10 SII PM CODE PAGE 852 (Eastern Europe)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	?	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	Ç	ü	é	â	ä	à	å	ç	ê	ë	è	í	î	ì	À	Å
90	É	æ	Æ	ô	ö	ò	û	ù	ÿ	Ö	Ü	ø	å	Ø	×	f
A0	á	í	ó	ú	ñ	Ñ	a	o	ö	ë	è	í	î	ì	«	»
B0	ß	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø
C0	└	└	└	└	└	└	└	└	└	└	└	└	└	└	└	└
D0	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð	ð
E0	ó	þ	ô	ö	ö	ö	μ	þ	þ	þ	þ	þ	þ	þ	ý	-
F0	-	±	=	%	¶	§	÷	,	°	..	.	1	3	2	■	

Figure A-11 SII_PM_CODE_PAGE_858 (Euro)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	?	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	°	·	·	√	▀	-	+	+	+	+	+	+	+	+	+	+
90	ß	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø	ø
A0	-	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ	ڦ
B0	·	۱	۲	۳	۴	۵	۶	۷	۸	۹	۰	ۻ	ۻ	ۻ	ۻ	ۻ
C0	¢	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤	¤
D0	د	خ	ح	ث	ت	ب	ا	ئ	ع	و	أ	ء	ـ	ـ	ـ	ـ
E0	ـ	غ	غ	ع	ض	ي	و	ه	ن	م	ل	ك	ق	ف	ـ	ـ
F0	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ	ـ

Figure A-12 SII_PM_CODE_PAGE_864 (Arabic)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	€	,	;	“	”	…	†	‡	‰	ſ	ſ	ſ	ſ	ſ	ſ	
90	,	,	,	,	,	,	,	,	,	,	,	,	,	,	,	
A0	„	„	„	„	„	„	„	„	„	„	„	„	„	„	„	
B0	°	±	ł	‘	μ	¶	·	–	–	–	–	–	–	–	–	
C0	Ŕ	Á	Â	Ä	Ĺ	Ć	Ç	�	�	�	�	�	�	�	�	
D0	Đ	Ń	Ñ	Ó	Ô	Ö	Ö	×	Ř	Ů	Ů	Ů	Ů	Ý	Ý	
E0	ŕ	á	â	ä	í	ć	ç	�	�	�	�	�	�	�	�	
F0	đ	ń	ñ	ó	ô	ö	ö	÷	ř	ů	ů	ů	ů	ý	ý	

Figure A-13 SII_PM_CODE_PAGE_1250 (Central European)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	Ђ	Ѓ	Ќ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ
90	Ђ	Ѓ	Ќ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ	Ѝ
A0	Ӯ	ӹ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ	ӻ
B0	°	±	І	і	ѓ	џ	·	ё	њ	е	»	ј	ſ	ſ	ſ	
C0	Ӑ	Ӓ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ
D0	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	Ҫ	
E0	Ӑ	Ӓ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ
F0	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ	ڒ

Figure A-14 SII_PM_CODE_PAGE_1251 (Cyrillic)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	€	,	;	“	”	…	†	‡	„	„	„	„	„	„	„	
90	,	;	“	”	•	-	-	-	™	„	„	„	„	„	„	
A0	“	À	Ã	¤	¥		฿	„	©	«	¬	-	®	-		
B0	°	±	²	³	‘	μ	¶	·	Ἐ	Ἡ	Ἴ	»	Ͳ	٪	߻	
C0	Ϊ	Α	Β	Γ	Δ	Ε	Ζ	Η	Θ	Ι	Κ	Λ	Μ	Ν	Ξ	Ω
D0	Π	Ρ	Σ	Τ	Υ	Φ	Χ	Ψ	Ω	Ϊ	Ϋ	ά	έ	ή	ί	ύ
E0	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ
F0	π	ρ	ς	σ	τ	υ	φ	χ	ψ	ω	Ϊ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ

Figure A-15 SII_PM_CODE_PAGE_1253 (Greek)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	!	"	#	\$	%	&	'	()	*	+	,	-	.	/	
30	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	
40	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
50	P	Q	R	S	T	U	V	W	X	Y	Z	[\	^	_	
60	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
70	p	q	r	s	t	u	v	w	x	y	z	{	}	~		
80	€	,	;	“	”	…	†	‡	„	„	„	„	„	„	„	
90	,	;	“	”	•	-	-	-	™	„	„	„	„	„	„	
A0	ı	φ	ƒ	¤	¥		฿	„	©	¤	«	¬	-	®	-	
B0	°	±	²	³	‘	μ	¶	·	‘	‘	‘	‘	‘	‘	‘	‘
C0	Ӑ	Ӓ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ	Ӗ
D0	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ	Ӯ
E0	à	á	â	ã	ä	å	ç	è	é	ê	ë	ì	í	î	í	í
F0	ğ	ñ	ò	ó	ô	õ	ö	÷	ø	ù	ú	û	ü	ı	ş	ÿ

Figure A-16 SII_PM_CODE_PAGE_1254 (Turkish)

A.2 International Character Set

Print results of the specific character codes or display results vary depending on the setting of the international character set.

The following table shows the specific character codes and their print results.

	23	24	40	5B	5C	5D	5E	60	7B	7C	7D	7E
COUNTRY_USA	#	\$	@	[\]	^	`	{		}	~
COUNTRY_FRANCE	#	\$	à	°	ç	é	^	’	é	ù	è	..
COUNTRY_GERMANY	#	\$	ä	ö	ü	ß	^	’	ä	ö	ü	ß
COUNTRY_ENGLAND	£	\$	@	[\]	^	’	{		}	~
COUNTRY_DENMARK_1	#	\$	@	Æ	Ø	Å	^	’	æ	ø	å	~
COUNTRY_SWEDEN	#	¤	É	Ä	Ö	Å	Ü	é	ää	ö	å	ü
COUNTRY_ITALY	#	\$	@	°	/	ñ	é	ù	à	ò	è	ì
COUNTRY_SPAIN	Pt	\$	@	í	ñ	¿	^	’	:	ñ	}	~
COUNTRY_JAPAN	#	\$	@	[¥]	^	’	{		}	~
COUNTRY_NORWAY	#	¤	É	Æ	Ø	Å	Ü	é	æ	ø	å	ü
COUNTRY_DENMARK_2	#	\$	É	Æ	Ø	Å	Ü	é	æ	ø	å	ü
COUNTRY_SPAIN_2	#	\$	á	í	ñ	¿	é	ü	í	ñ	ó	ú
COUNTRY_LATIN_AMERICA	#	\$	á	í	ñ	¿	é	ü	í	ñ	ó	ú
COUNTRY_ARABIA	#	\$	@	[\]	^	’	{		}	~

Figure A-17 International Character Set

Appendix B

Barcode Size List

B.1 Barcode Size List

B.1.1 printBarcode, printPageModeBarcode



(1) Height of the barcode image

hriFont	hriPosition	Length from Top of Barcode to Reference Point	Height of Barcode Image
SII_PM_FONT_A	SII_PM_HRI_NONE	moduleHeight	moduleHeight
	SII_PM_HRI_POSITION ABOVE	moduleHeight + 32	moduleHeight + 32
	SII_PM_HRI_POSITION BELOW	moduleHeight	moduleHeight + 32
	SII_PM_HRI_POSITION ABOVE_BELOW	moduleHeight + 64	moduleHeight + 64
SII_PM_FONT_B	SII_PM_HRI_NONE	moduleHeight	moduleHeight
	SII_PM_HRI_POSITION ABOVE	moduleHeight + 24	moduleHeight + 24
	SII_PM_HRI_POSITION BELOW	moduleHeight	moduleHeight + 24
	SII_PM_HRI_POSITION ABOVE_BELOW	moduleHeight + 48	moduleHeight + 48

(2) Width of the barcode image

barcodeSymbol	moduleSize	Width of Barcode Image
SII_PM_BARCODE_UPC_A	SII_PM_BARCODE_MODULE_WIDTH_2	226
	SII_PM_BARCODE_MODULE_WIDTH_3	339
	SII_PM_BARCODE_MODULE_WIDTH_4	452
	SII_PM_BARCODE_MODULE_WIDTH_5	565
	SII_PM_BARCODE_MODULE_WIDTH_6	678
SII_PM_BARCODE_UPC_E	SII_PM_BARCODE_MODULE_WIDTH_2	130
	SII_PM_BARCODE_MODULE_WIDTH_3	195
	SII_PM_BARCODE_MODULE_WIDTH_4	260
	SII_PM_BARCODE_MODULE_WIDTH_5	325
	SII_PM_BARCODE_MODULE_WIDTH_6	390
SII_PM_BARCODE_EAN13	SII_PM_BARCODE_MODULE_WIDTH_2	226
	SII_PM_BARCODE_MODULE_WIDTH_3	339
	SII_PM_BARCODE_MODULE_WIDTH_4	452
	SII_PM_BARCODE_MODULE_WIDTH_5	565
	SII_PM_BARCODE_MODULE_WIDTH_6	678
SII_PM_BARCODE_JAN13	SII_PM_BARCODE_MODULE_WIDTH_2	226
	SII_PM_BARCODE_MODULE_WIDTH_3	339
	SII_PM_BARCODE_MODULE_WIDTH_4	452
	SII_PM_BARCODE_MODULE_WIDTH_5	565
	SII_PM_BARCODE_MODULE_WIDTH_6	678
SII_PM_BARCODE_EAN8	SII_PM_BARCODE_MODULE_WIDTH_2	162
	SII_PM_BARCODE_MODULE_WIDTH_3	243
	SII_PM_BARCODE_MODULE_WIDTH_4	324
	SII_PM_BARCODE_MODULE_WIDTH_5	405
	SII_PM_BARCODE_MODULE_WIDTH_6	486
SII_PM_BARCODE_JAN8	SII_PM_BARCODE_MODULE_WIDTH_2	162
	SII_PM_BARCODE_MODULE_WIDTH_3	243
	SII_PM_BARCODE_MODULE_WIDTH_4	324
	SII_PM_BARCODE_MODULE_WIDTH_5	405
	SII_PM_BARCODE_MODULE_WIDTH_6	486
SII_PM_BARCODE_CODE93	SII_PM_BARCODE_MODULE_WIDTH_2	$18 \times \text{number of barcode data} + 96$
	SII_PM_BARCODE_MODULE_WIDTH_3	$27 \times \text{number of barcode data} + 144$
	SII_PM_BARCODE_MODULE_WIDTH_4	$36 \times \text{number of barcode data} + 192$
	SII_PM_BARCODE_MODULE_WIDTH_5	$45 \times \text{number of barcode data} + 240$
	SII_PM_BARCODE_MODULE_WIDTH_6	$54 \times \text{number of barcode data} + 288$
SII_PM_BARCODE_CODE128	SII_PM_BARCODE_MODULE_WIDTH_2	$22 \times \text{number of barcode data} + 66$
	SII_PM_BARCODE_MODULE_WIDTH_3	$33 \times \text{number of barcode data} + 99$
	SII_PM_BARCODE_MODULE_WIDTH_4	$44 \times \text{number of barcode data} + 132$

barcodeSymbol	moduleSize	Width of Barcode Image
SII_PM_BARCODE_CODE128	SII_PM_BARCODE_MODULE_WIDTH_5	55 × number of barcode data + 165
	SII_PM_BARCODE_MODULE_WIDTH_6	66 × number of barcode data + 198

barcodeSymbol	nwRatio	moduleSize	Width of Barcode Image
SII_PM_BARCODE_CODE39	SII_PM_NWRATIO_1TO2	SII_PM_BARCODE_MODULE_WIDTH_2	26 × number of barcode data + 90
		SII_PM_BARCODE_MODULE_WIDTH_3	39 × number of barcode data + 135
		SII_PM_BARCODE_MODULE_WIDTH_4	52 × number of barcode data + 180
		SII_PM_BARCODE_MODULE_WIDTH_5	65 × number of barcode data + 225
		SII_PM_BARCODE_MODULE_WIDTH_6	78 × number of barcode data + 270
		SII_PM_BARCODE_MODULE_WIDTH_2	29 × number of barcode data + 96
	SII_PM_NWRATIO_1TO2_5	SII_PM_BARCODE_MODULE_WIDTH_3	45 × number of barcode data + 147
		SII_PM_BARCODE_MODULE_WIDTH_4	58 × number of barcode data + 192
		SII_PM_BARCODE_MODULE_WIDTH_5	74 × number of barcode data + 243
		SII_PM_BARCODE_MODULE_WIDTH_6	87 × number of barcode data + 288
		SII_PM_BARCODE_MODULE_WIDTH_2	32 × number of barcode data + 102
	SII_PM_NWRATIO_1TO3	SII_PM_BARCODE_MODULE_WIDTH_3	48 × number of barcode data + 153
		SII_PM_BARCODE_MODULE_WIDTH_4	64 × number of barcode data + 204
		SII_PM_BARCODE_MODULE_WIDTH_5	80 × number of barcode data + 255
		SII_PM_BARCODE_MODULE_WIDTH_6	96 × number of barcode data + 306
		SII_PM_BARCODE_MODULE_WIDTH_2	14 × number of barcode data + 56
SII_PM_BARCODE_ITF	SII_PM_NWRATIO_1TO2	SII_PM_BARCODE_MODULE_WIDTH_3	21 × number of barcode data + 84
		SII_PM_BARCODE_MODULE_WIDTH_4	28 × number of barcode data + 112
		SII_PM_BARCODE_MODULE_WIDTH_5	35 × number of barcode data + 140
		SII_PM_BARCODE_MODULE_WIDTH_6	42 × number of barcode data + 168

barcodeSymbol	nwRatio	moduleSize	Width of Barcode Image
SII_PM_BARCODE_ITF	SII_PM_NWRATIO_1TO2_5	SII_PM_BARCODE_MODULE_WIDTH_2	$16 \times \text{number of barcode data} + 57$
		SII_PM_BARCODE_MODULE_WIDTH_3	$25 \times \text{number of barcode data} + 86$
		SII_PM_BARCODE_MODULE_WIDTH_4	$32 \times \text{number of barcode data} + 114$
		SII_PM_BARCODE_MODULE_WIDTH_5	$41 \times \text{number of barcode data} + 143$
		SII_PM_BARCODE_MODULE_WIDTH_6	$48 \times \text{number of barcode data} + 171$
	SII_PM_NWRATIO_1TO3	SII_PM_BARCODE_MODULE_WIDTH_2	$18 \times \text{number of barcode data} + 58$
		SII_PM_BARCODE_MODULE_WIDTH_3	$27 \times \text{number of barcode data} + 87$
		SII_PM_BARCODE_MODULE_WIDTH_4	$36 \times \text{number of barcode data} + 116$
		SII_PM_BARCODE_MODULE_WIDTH_5	$45 \times \text{number of barcode data} + 145$
		SII_PM_BARCODE_MODULE_WIDTH_6	$54 \times \text{number of barcode data} + 174$
SII_PM_BARCODE_CODABAR* ¹	SII_PM_NWRATIO_1TO2	SII_PM_BARCODE_MODULE_WIDTH_2	$20 \times \text{number of data} + 2 \times (2 + \text{number of wide data}) + 38$
		SII_PM_BARCODE_MODULE_WIDTH_3	$30 \times \text{number of data} + 3 \times (2 + \text{number of wide data}) + 57$
		SII_PM_BARCODE_MODULE_WIDTH_4	$40 \times \text{number of data} + 4 \times (2 + \text{number of wide data}) + 76$
		SII_PM_BARCODE_MODULE_WIDTH_5	$50 \times \text{number of data} + 5 \times (2 + \text{number of wide data}) + 95$
		SII_PM_BARCODE_MODULE_WIDTH_6	$60 \times \text{number of data} + 6 \times (2 + \text{number of wide data}) + 114$
	SII_PM_NWRATIO_1TO2_5	SII_PM_BARCODE_MODULE_WIDTH_2	$22 \times \text{number of data} + 3 \times (2 + \text{number of wide data}) + 38$
		SII_PM_BARCODE_MODULE_WIDTH_3	$34 \times \text{number of data} + 5 \times (2 + \text{number of wide data}) + 57$
		SII_PM_BARCODE_MODULE_WIDTH_4	$44 \times \text{number of data} + 6 \times (2 + \text{number of wide data}) + 76$
		SII_PM_BARCODE_MODULE_WIDTH_5	$56 \times \text{number of data} + 8 \times (2 + \text{number of wide data}) + 95$
		SII_PM_BARCODE_MODULE_WIDTH_6	$66 \times \text{number of data} + 9 \times (2 + \text{number of wide data}) + 114$

*1: The number of data is the number of all characters except for the start and stop characters.

The wide data is the number of ":" / . "+".

barcodeSymbol	nwRatio	moduleSize	Width of Barcode Image
SII_PM_BARCODE_CODABAR* ¹	SII_PM_NWRATIO_1TO3	SII_PM_BARCODE_MODULE_WIDTH_2	$24 \times \text{number of data} + 4 \times (2 + \text{number of wide data}) + 38$
		SII_PM_BARCODE_MODULE_WIDTH_3	$36 \times \text{number of data} + 6 \times (2 + \text{number of wide data}) + 57$
		SII_PM_BARCODE_MODULE_WIDTH_4	$48 \times \text{number of data} + 8 \times (2 + \text{number of wide data}) + 76$
		SII_PM_BARCODE_MODULE_WIDTH_5	$60 \times \text{number of data} + 10 \times (2 + \text{number of wide data}) + 95$
		SII_PM_BARCODE_MODULE_WIDTH_6	$72 \times \text{number of data} + 12 \times (2 + \text{number of wide data}) + 114$

*1: The number of data is the number of all characters except for the start and stop characters.

The wide data is the number of ": / . +".

barcodeSymbol	Number of Data	moduleSize	Width of Barcode Image
SII_PM_BARCODE_EAN13_ADDON	14 or 15	SII_PM_BARCODE_MODULE_WIDTH_2	276
		SII_PM_BARCODE_MODULE_WIDTH_3	414
		SII_PM_BARCODE_MODULE_WIDTH_4	552
		SII_PM_BARCODE_MODULE_WIDTH_5	690
		SII_PM_BARCODE_MODULE_WIDTH_6	828
	17 or 18	SII_PM_BARCODE_MODULE_WIDTH_2	330
		SII_PM_BARCODE_MODULE_WIDTH_3	495
		SII_PM_BARCODE_MODULE_WIDTH_4	660
		SII_PM_BARCODE_MODULE_WIDTH_5	825
		SII_PM_BARCODE_MODULE_WIDTH_6	990
SII_PM_BARCODE_JAN13_ADDON	14 or 15	SII_PM_BARCODE_MODULE_WIDTH_2	276
		SII_PM_BARCODE_MODULE_WIDTH_3	414
		SII_PM_BARCODE_MODULE_WIDTH_4	552
		SII_PM_BARCODE_MODULE_WIDTH_5	690
		SII_PM_BARCODE_MODULE_WIDTH_6	828
	17 or 18	SII_PM_BARCODE_MODULE_WIDTH_2	330
		SII_PM_BARCODE_MODULE_WIDTH_3	495
		SII_PM_BARCODE_MODULE_WIDTH_4	660
		SII_PM_BARCODE_MODULE_WIDTH_5	825
		SII_PM_BARCODE_MODULE_WIDTH_6	990

B.1.2 printPDF417, printPageModePDF417



(1) Height of the barcode image

moduleSize	Height of Barcode Image*1
SII_PM_PDF417_MODULE_WIDTH_2	moduleHeight × row ^{*2} + 8
SII_PM_PDF417_MODULE_WIDTH_3	moduleHeight × row ^{*2} + 12
SII_PM_PDF417_MODULE_WIDTH_4	moduleHeight × row ^{*2} + 16

*1: Height of the barcode image = Length from the top of the barcode to the reference point


*2: Parameter row ≠ 0

(2) Width of the barcode image

pdf417Symbol	moduleSize	Width of Barcode Image
SII_PM_PDF417_STANDARD	SII_PM_PDF417_MODULE_WIDTH_2	(17 × column ^{*1} + 69) × 2 + 8
	SII_PM_PDF417_MODULE_WIDTH_3	(17 × column ^{*1} + 69) × 3 + 12
	SII_PM_PDF417_MODULE_WIDTH_4	(17 × column ^{*1} + 69) × 4 + 16
SII_PM_PDF417_COMPACT	SII_PM_PDF417_MODULE_WIDTH_2	(17 × column ^{*1} + 69) × 2 + 8
	SII_PM_PDF417_MODULE_WIDTH_3	(17 × column ^{*1} + 69) × 3 + 12
	SII_PM_PDF417_MODULE_WIDTH_4	(17 × column ^{*1} + 69) × 4 + 16

*1: Parameter column ≠ 0

B.1.3 printQRCode, printPageModeQRCode

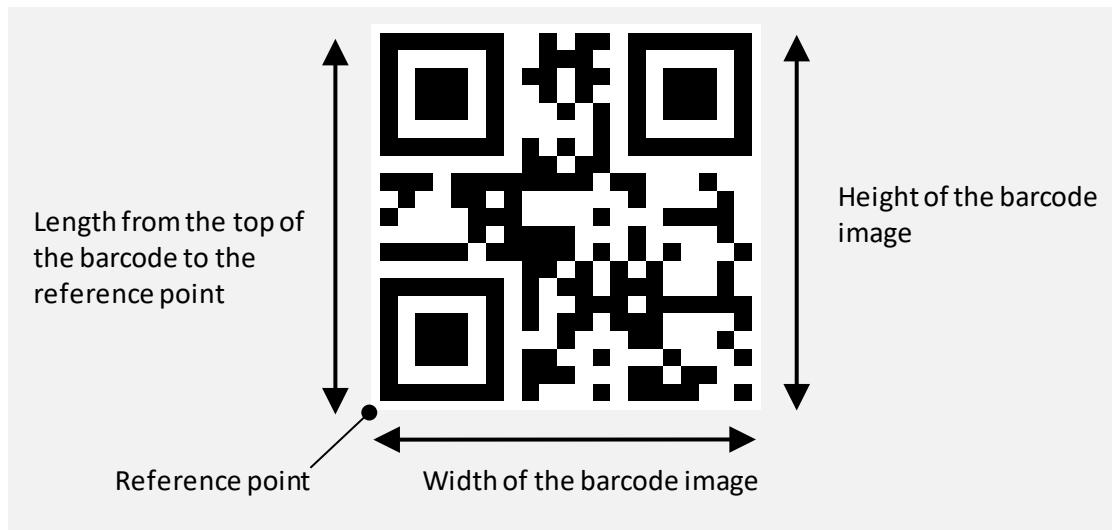

(1) Height and width of the barcode image

$$\text{Height}^{\ast 1} \text{ and width of the barcode image} = (4 \times \text{version}^{\ast 2} + 17 + 8) \times \text{module size value}$$


^{*1}: Height of the barcode image = Length from the top of the barcode to the reference point

^{*2}: The version is determined by the content of the barcode data and the error correction level.

Module Size Value

moduleSize	Module Size Value
SII_PM_QR_MODULE_SIZE_2	2
SII_PM_QR_MODULE_SIZE_3	3
SII_PM_QR_MODULE_SIZE_4	4
SII_PM_QR_MODULE_SIZE_5	5
SII_PM_QR_MODULE_SIZE_6	6
SII_PM_QR_MODULE_SIZE_7	7
SII_PM_QR_MODULE_SIZE_8	8
SII_PM_QR_MODULE_SIZE_9	9
SII_PM_QR_MODULE_SIZE_10	10
SII_PM_QR_MODULE_SIZE_11	11

B.1.4 printDataMatrix, printPageModeDataMatrix

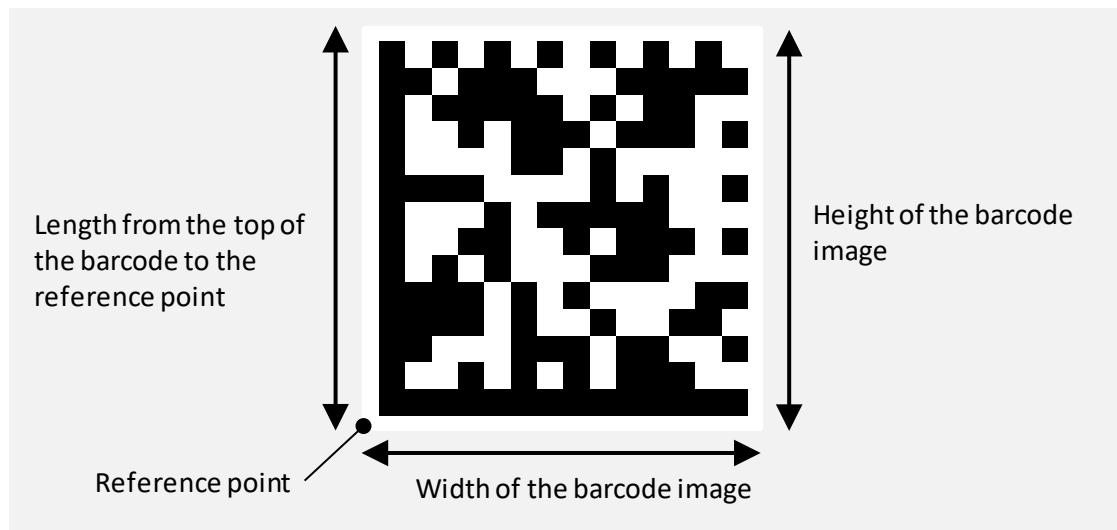

(1) Height and width of the barcode image

Height of the barcode image = (number of vertical module + 2) × module size value

Width of the barcode image = (number of horizontal module + 2) × module size value


dataMatrixModule	Number of Vertical Module	Number of Horizontal Module
SII_PM_DATA_MATRIX_10_10	10	10
SII_PM_DATA_MATRIX_12_12	12	12
SII_PM_DATA_MATRIX_14_14	14	14
SII_PM_DATA_MATRIX_16_16	16	16
SII_PM_DATA_MATRIX_18_18	18	18
SII_PM_DATA_MATRIX_20_20	20	20
SII_PM_DATA_MATRIX_22_22	22	22
SII_PM_DATA_MATRIX_24_24	23	23
SII_PM_DATA_MATRIX_26_26	26	26
SII_PM_DATA_MATRIX_32_32	32	32
SII_PM_DATA_MATRIX_36_36	36	36
SII_PM_DATA_MATRIX_40_40	40	40
SII_PM_DATA_MATRIX_44_44	44	44
SII_PM_DATA_MATRIX_48_48	48	48
SII_PM_DATA_MATRIX_52_52	52	52
SII_PM_DATA_MATRIX_64_64	64	64
SII_PM_DATA_MATRIX_72_72	72	72
SII_PM_DATA_MATRIX_80_80	80	80
SII_PM_DATA_MATRIX_88_88	88	88
SII_PM_DATA_MATRIX_96_96	96	96
SII_PM_DATA_MATRIX_104_104	104	104

dataMatrixModule	Number of Vertical Module	Number of Horizontal Module
SII_PM_DATA_MATRIX_120_120	120	120
SII_PM_DATA_MATRIX_132_132	132	132
SII_PM_DATA_MATRIX_144_144	144	144
SII_PM_DATA_MATRIX_8_18	8	18
SII_PM_DATA_MATRIX_8_32	8	32
SII_PM_DATA_MATRIX_12_26	12	26
SII_PM_DATA_MATRIX_12_36	12	36
SII_PM_DATA_MATRIX_16_36	16	36
SII_PM_DATA_MATRIX_16_48	16	48

Module Size Value

moduleSize	Module Size Value
SII_PM_DATAMATRIX_MODULE_SIZE_2	2
SII_PM_DATAMATRIX_MODULE_SIZE_3	3
SII_PM_DATAMATRIX_MODULE_SIZE_4	4
SII_PM_DATAMATRIX_MODULE_SIZE_5	5
SII_PM_DATAMATRIX_MODULE_SIZE_6	6
SII_PM_DATAMATRIX_MODULE_SIZE_7	7
SII_PM_DATAMATRIX_MODULE_SIZE_8	8
SII_PM_DATAMATRIX_MODULE_SIZE_9	9
SII_PM_DATAMATRIX_MODULE_SIZE_10	10
SII_PM_DATAMATRIX_MODULE_SIZE_11	11

B.1.5 printMaxicode, printPageModeMaxicode

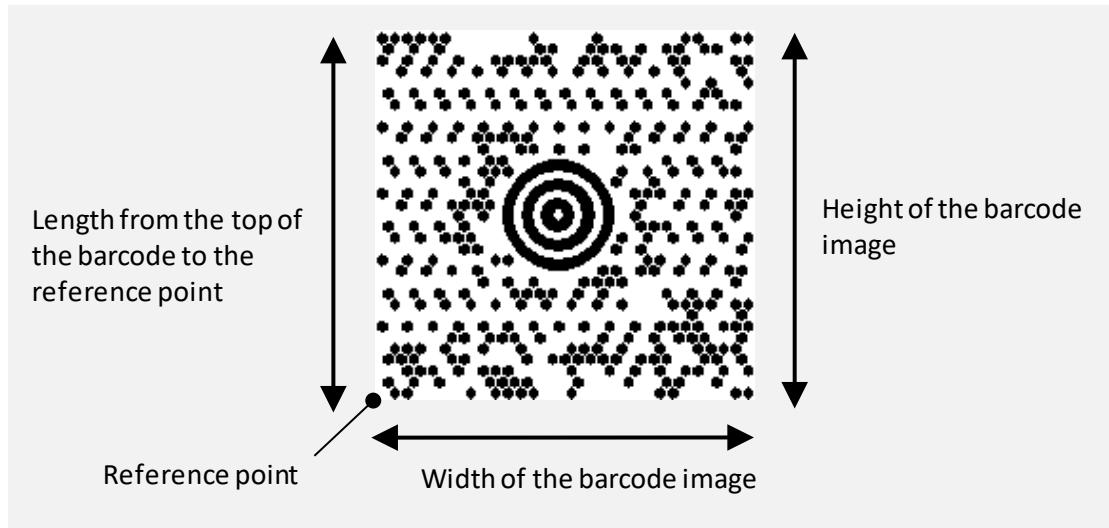

(1) Height of the barcode image

Height of the barcode image^{*1} = 215

*1: Height of the barcode image = Length from the top of the barcode to the reference point

(2) Width of the barcode image

Width of the barcode image = 225

Appendix C

Open Source Software License

This chapter describes the License of open source software used in the library.

C.1 MIT License

- **SSZipArchive**

Copyright (c) 2010-2012 Sam Soffes

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

C.2 Apache License 2.0

- **zxingify-objc**

Copyright 2012 ZXing authors

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.